
d3rlpy

Takuma Seno

Feb 18, 2024

TUTORIALS

1	Tutorials	3
1.1	Getting Started	3
1.2	Data Collection	6
1.3	Create Your Dataset	7
1.4	Preprocess / Postprocess	8
1.5	Customize Neural Network	10
1.6	Online RL	12
1.7	Finetuning	13
1.8	Offline Policy Selection	15
1.9	Use Distributional Q-Function	19
1.10	After Training Policies (Save and Load)	20
2	Jupyter Notebooks	23
3	Software Design	25
3.1	MDPDataSet	25
3.2	Algorithm	26
4	API Reference	27
4.1	Algorithms	27
4.2	Q Functions	79
4.3	Replay Buffer	87
4.4	Datasets	114
4.5	Preprocessing	118
4.6	Optimizers	152
4.7	Network Architectures	163
4.8	Metrics	173
4.9	Off-Policy Evaluation	179
4.10	Logging	199
4.11	Online Training	210
5	Command Line Interface	213
5.1	plot	213
5.2	plot-all	214
5.3	export	215
5.4	record	215
5.5	play	216
5.6	install	216
6	Installation	217
6.1	Recommended Platforms	217

6.2	Install d3rlpy	217
7	Tips	219
7.1	Reproducibility	219
7.2	Learning from image observation	219
7.3	Improve performance beyond the original paper	220
8	Paper Reproductions	221
9	License	223
10	Indices and tables	225
	Python Module Index	227
	Index	229

d3rlpy is a easy-to-use offline deep reinforcement learning library.

```
$ pip install d3rlpy
```

d3rlpy provides state-of-the-art offline deep reinforcement learning algorithms through out-of-the-box scikit-learn-style APIs. Unlike other RL libraries, the provided algorithms can achieve extremely powerful performance beyond their papers via several tweaks.

1.1 Getting Started

This tutorial is also available on [Google Colaboratory](#)

1.1.1 Install

First of all, let's install d3rlpy on your machine:

```
$ pip install d3rlpy
```

See more information at [Installation](#).

Note: If `core dump` error occurs in this tutorial, please try [Install from source](#).

Note: d3rlpy supports Python 3.7+. Make sure which version you use.

Note: If you use GPU, please setup CUDA first.

1.1.2 Prepare Dataset

You can make your own dataset without any efforts. In this tutorial, let's use integrated datasets to start. If you want to make a new dataset, see [Replay Buffer](#).

d3rlpy provides suites of datasets for testing algorithms and research. See more documents at [Datasets](#).

```
from d3rlpy.datasets import get_cartpole # CartPole-v1 dataset
from d3rlpy.datasets import get_pendulum # Pendulum-v1 dataset
from d3rlpy.datasets import get_atari   # Atari 2600 task datasets
from d3rlpy.datasets import get_d4rl    # D4RL datasets
```

Here, we use the CartPole dataset to instantly check training results.

```
dataset, env = get_cartpole()
```

1.1.3 Setup Algorithm

There are many algorithms available in d3rlpy. Since CartPole is the simple task, let's start from DQN, which is the Q-learning algorithm proposed as the first deep reinforcement learning algorithm.

```
from d3rlpy.algos import DQNConfig

# if you don't use GPU, set device=None instead.
dqn = DQNConfig().create(device="cuda:0")

# initialize neural networks with the given observation shape and action size.
# this is not necessary when you directly call fit or fit_online method.
dqn.build_with_dataset(dataset)
```

See more algorithms and configurations at [Algorithms](#).

1.1.4 Setup Metrics

Collecting evaluation metrics is important to train algorithms properly. d3rlpy provides Evaluator classes to compute evaluation metrics.

```
from d3rlpy.metrics import TDErrorEvaluator

# calculate metrics with training dataset
td_error_evaluator = TDErrorEvaluator(epochs=dataset.epochs)
```

Since evaluating algorithms without access to environment is still difficult, the algorithm can be directly evaluated with EnvironmentEvaluator if the environment is available to interact.

```
from d3rlpy.metrics import EnvironmentEvaluator

# set environment in scorer function
env_evaluator = EnvironmentEvaluator(env)

# evaluate algorithm on the environment
rewards = env_evaluator(dqn, dataset=None)
```

See more metrics and configurations at [Metrics](#).

1.1.5 Start Training

Now, you have everything to start offline training.

```
dqn.fit(
    dataset,
    n_steps=10000,
    evaluators={
        'td_error': td_error_evaluator,
        'environment': env_evaluator,
    },
)
```

See more about logging at [Logging](#).

Once the training is done, your algorithm is ready to make decisions.

```
observation, _ = env.reset()

# return actions based on the greedy-policy
action = dqn.predict(np.expand_dims(observation, axis=0))

# estimate action-values
value = dqn.predict_value(np.expand_dims(observation, axis=0), action)
```

1.1.6 Save and Load

d3rlpy provides several ways to save trained models.

```
import d3rlpy

# save full parameters and configurations in a single file.
dqn.save('dqn.d3')
# load full parameters and build algorithm
dqn2 = d3rlpy.load_learnable("dqn.d3")

# save full parameters only
dqn.save_model('dqn.pt')
# load full parameters with manual setup
dqn3 = DQN()
dqn3.build_with_dataset(dataset)
dqn3.load_model('dqn.pt')

# save the greedy-policy as TorchScript
dqn.save_policy('policy.pt')
# save the greedy-policy as ONNX
dqn.save_policy('policy.onnx')
```

See more information at [After Training Policies \(Save and Load\)](#).

1.2 Data Collection

d3rlpy provides APIs to support data collection from environments. This feature is specifically useful if you want to build your own original datasets for research or practice purposes.

1.2.1 Prepare Environment

d3rlpy supports environments with OpenAI Gym interface. In this tutorial, let's use simple CartPole environment.

```
import gym

env = gym.make("CartPole-v1")
```

1.2.2 Data Collection with Random Policy

If you want to collect experiences with uniformly random policy, you can use `RandomPolicy` and `DiscreteRandomPolicy`. This procedure corresponds to random datasets in D4RL.

```
import d3rlpy

# setup algorithm
random_policy = d3rlpy.algos.DiscreteRandomPolicyConfig().create()

# prepare experience replay buffer
buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

# start data collection
random_policy.collect(env, buffer, n_steps=1000000)

# save ReplayBuffer
with open("random_policy_dataset.h5", "w+b") as f:
    buffer.dump(f)
```

1.2.3 Data Collection with Trained Policy

If you want to collect experiences with previously trained policy, you can still use the same set of APIs. Here, let's say a DQN model is saved as `dqn_model.d3`. This procedure corresponds to medium datasets in D4RL.

```
# prepare pretrained algorithm
dqn = d3rlpy.load_learnable("dqn_model.d3")

# prepare experience replay buffer
buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

# start data collection
dqn.collect(env, buffer, n_steps=1000000)

# save ReplayBuffer
with open("trained_policy_dataset.h5", "w+b") as f:
    buffer.dump(f)
```

1.2.4 Data Collection while Training Policy

If you want to use experiences collected during training to build a new dataset, you can simply use `fit_online` and save the dataset. This procedure corresponds to replay datasets in D4RL.

```
# setup algorithm
dqn = d3rlpy.algos.DQNConfig().create()

# prepare experience replay buffer
buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

# prepare exploration strategy if necessary
explorer = d3rlpy.algos.ConstantEpsilonGreedy(0.3)

# start data collection
dqn.fit_online(env, buffer, explorer, n_steps=1000000)

# save ReplayBuffer
with open("replay_dataset.h5", "w+b") as f:
    buffer.dump(f)
```

1.3 Create Your Dataset

The data collection API is introduced in [Data Collection](#). In this tutorial, you can learn how to build your dataset from logged data such as the user data collected in your web service.

1.3.1 Prepare Logged Data

First of all, you need to prepare your logged data. In this tutorial, let's use randomly generated data. `terminals` represents the last step of episodes. If `terminals[i] == 1.0`, *i*-th step is the terminal state. Otherwise you need to set zeros for non-terminal states.

```
import numpy as np

# vector observation
# 1000 steps of observations with shape of (100,)
observations = np.random.random((1000, 100))

# 1000 steps of actions with shape of (4,)
actions = np.random.random((1000, 4))

# 1000 steps of rewards
rewards = np.random.random(1000)

# 1000 steps of terminal flags
terminals = np.random.randint(2, size=1000)
```

1.3.2 Build MDPDataset

Once your logged data is ready, you can build MDPDataset object.

```
import d3rlpy

dataset = d3rlpy.dataset.MDPDataset(
    observations=observations,
    actions=actions,
    rewards=rewards,
    terminals=terminals,
)
```

1.3.3 Set Timeout Flags

In RL, there is the case where you want to stop an episode without a terminal state. For example, if you're collecting data of a 4-legged robot walking forward, the walking task basically never ends as long as the robot keeps walking while the logged episode must stop somewhere. In this case, you can use `timeouts` to represent this timeout states.

```
# terminal states
terminals = np.zeros(1000)

# timeout states
timeouts = np.random.randint(2, size=1000)

dataset = d3rlpy.dataset.MDPDataset(
    observations=observations,
    actions=actions,
    rewards=rewards,
    terminals=terminals,
    timeouts=timeouts,
)
```

1.4 Preprocess / Postprocess

In this tutorial, you can learn how to preprocess datasets and postprocess continuous action outputs. Please check [Preprocessing](#) for more information.

1.4.1 Preprocess Observations

If your dataset includes unnormalized observations, you can normalize or standardize the observations by specifying `observation_scaler` argument. In this case, the statistics of the dataset will be computed at the beginning of offline training.

```
import d3rlpy

dataset, _ = d3rlpy.datasets.get_dataset("pendulum-random")

# prepare scaler without initialization
```

(continues on next page)

(continued from previous page)

```
observation_scaler = d3rlpy.preprocessing.StandardObservationScaler()

sac = d3rlpy.algos.SACConfig(observation_scaler=observation_scaler).create()
```

Alternatively, you can manually instantiate preprocessing parameters.

```
# setup manually
observations = []
for episode in dataset.episodes:
    observations += episode.observations.tolist()
mean = np.mean(observations, axis=0)
std = np.std(observations, axis=0)
observation_scaler = d3rlpy.preprocessing.StandardObservationScaler(mean=mean, std=std)

# set as observation_scaler
sac = d3rlpy.algos.SACConfig(observation_scaler=observation_scaler).create()
```

Please check [Preprocessing](#) for the full list of available observation preprocessors.

1.4.2 Preprocess / Postprocess Actions

In training with continuous action-space, the actions must be in the range between $[-1.0, 1.0]$ due to the underlying tanh activation at the policy functions. In d3rlpy, you can easily normalize inputs and denormalize output instead of normalizing datasets by yourself.

```
# prepare scaler without initialization
action_scaler = d3rlpy.preprocessing.MinMaxActionScaler()

# set as action scaler
sac = d3rlpy.algos.SACConfig(action_scaler=action_scaler).create()

# setup manually
actions = []
for episode in dataset.episodes:
    actions += episode.actions.tolist()
minimum_action = np.min(actions, axis=0)
maximum_action = np.max(actions, axis=0)
action_scaler = d3rlpy.preprocessing.MinMaxActionScaler(
    minimum=minimum_action,
    maximum=maximum_action,
)

# set as action scaler
sac = d3rlpy.algos.SACConfig(action_scaler=action_scaler).create()
```

Please check [Preprocessing](#) for the full list of available action preprocessors.

1.4.3 Preprocess Rewards

The effect of scaling rewards is not well studied yet in RL community, however, it's confirmed that the reward scale affects training performance.

```
# prepare scaler without initialization
reward_scaler = d3rlpy.preprocessing.StandardRewardScaler()

# set as reward scaler
sac = d3rlpy.algos.SACConfig(reward_scaler=reward_scaler).create()

# setup manually
rewards = []
for episode in dataset.episodes:
    rewards += episode.rewards.tolist()
mean = np.mean(rewards)
std = np.std(rewards)
reward_scaler = StandardRewardScaler(mean=mean, std=std)

# set as reward scaler
sac = d3rlpy.algos.SACConfig(reward_scaler=reward_scaler).create()
```

Please check [Preprocessing](#) for the full list of available reward preprocessors.

1.5 Customize Neural Network

In this tutorial, you can learn how to integrate your own neural network models to d3rlpy. Please check [Network Architectures](#) for more information.

1.5.1 Prepare PyTorch Model

If you're familiar with PyTorch, this step should be easy for you.

```
import torch
import torch.nn as nn
import d3rlpy

class CustomEncoder(nn.Module):
    def __init__(self, observation_shape, feature_size):
        super().__init__()
        self.feature_size = feature_size
        self.fc1 = nn.Linear(observation_shape[0], feature_size)
        self.fc2 = nn.Linear(feature_size, feature_size)

    def forward(self, x):
        h = torch.relu(self.fc1(x))
        h = torch.relu(self.fc2(h))
        return h
```

1.5.2 Setup EncoderFactory

Once you setup your PyTorch model, you need to setup `EncoderFactory` as a dataclass class. In your `EncoderFactory` class, you need to define `create` and `get_type`. `get_type` method is used to serialize your customized neural network configuration.

```
import dataclasses

@dataclasses.dataclass()
class CustomEncoderFactory(d3rlpy.models.EncoderFactory):
    feature_size: int

    def create(self, observation_shape):
        return CustomEncoder(observation_shape, self.feature_size)

    @staticmethod
    def get_type() -> str:
        return "custom"
```

Now, you can use your model with d3rlpy.

```
# integrate your model into d3rlpy algorithm
dqn = d3rlpy.algos.DQNConfig(encoder_factory=CustomEncoderFactory(64)).create()
```

1.5.3 Support Q-function for Actor-Critic

In the above example, your original model is designed for the network that takes an observation as an input. However, if you customize a Q-function of actor-critic algorithm (e.g. SAC), you need to prepare an action-conditioned model.

```
class CustomEncoderWithAction(nn.Module):
    def __init__(self, observation_shape, action_size, feature_size):
        super().__init__()
        self.feature_size = feature_size
        self.fc1 = nn.Linear(observation_shape[0] + action_size, feature_size)
        self.fc2 = nn.Linear(feature_size, feature_size)

    def forward(self, x, action):
        h = torch.cat([x, action], dim=1)
        h = torch.relu(self.fc1(h))
        h = torch.relu(self.fc2(h))
        return h
```

Finally, you can update your `CustomEncoderFactory` as follows.

```
@dataclasses.dataclass()
class CustomEncoderFactory(d3rlpy.models.EncoderFactory):
    feature_size: int

    def create(self, observation_shape):
        return CustomEncoder(observation_shape, self.feature_size)

    def create_with_action(self, observation_shape, action_size, discrete_action):
        return CustomEncoderWithAction(observation_shape, action_size, self.feature_size)
```

(continues on next page)

(continued from previous page)

```
@staticmethod
def get_type() -> str:
    return "custom"
```

Now, you can customize actor-critic algorithms.

```
encoder_factory = CustomEncoderFactory(64)

sac = d3rlpy.algos.SACConfig(
    actor_encoder_factory=encoder_factory,
    critic_encoder_factory=encoder_factory,
).create()
```

1.6 Online RL

1.6.1 Prepare Environment

d3rlpy supports environments with OpenAI Gym interface. In this tutorial, let's use simple CartPole environment.

```
import gym

# for training
env = gym.make("CartPole-v1")

# for evaluation
eval_env = gym.make("CartPole-v1")
```

1.6.2 Setup Algorithm

Just like offline RL training, you can setup an algorithm object.

```
import d3rlpy

# if you don't use GPU, set use_gpu=False instead.
dqn = d3rlpy.algos.DQNConfig(
    batch_size=32,
    learning_rate=2.5e-4,
    target_update_interval=100,
).create(device="cuda:0")

# initialize neural networks with the given environment object.
# this is not necessary when you directly call fit or fit_online method.
dqn.build_with_env(env)
```

1.6.3 Setup Online RL Utilities

Unlike offline RL training, you'll need to setup an experience replay buffer and an exploration strategy.

```
# experience replay buffer
buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

# exploration strategy
# in this tutorial, epsilon-greedy policy with static epsilon=0.3
explorer = d3rlpy.algos.ConstantEpsilonGreedy(0.3)
```

1.6.4 Start Training

Now, you have everything you need to start online RL training. Let's put them together!

```
dqn.fit_online(
    env,
    buffer,
    explorer,
    n_steps=100000, # train for 100K steps
    eval_env=eval_env,
    n_steps_per_epoch=1000, # evaluation is performed every 1K steps
    update_start_step=1000, # parameter update starts after 1K steps
)
```

1.6.5 Train with Stochastic Policy

If the algorithm uses a stochastic policy (e.g. SAC), you can train algorithms without setting an exploration strategy.

```
sac = d3rlpy.algos.DiscreteSACConfig().create()
sac.fit_online(
    env,
    buffer,
    n_steps=100000,
    eval_env=eval_env,
    n_steps_per_epoch=1000,
    update_start_step=1000,
)
```

1.7 Finetuning

d3rlpy supports smooth transition from offline training to online training.

1.7.1 Prepare Dataset and Environment

In this tutorial, let's use a built-in dataset for CartPole-v0 environment.

```
import d3rlpy

# setup random CartPole-v0 dataset and environment
dataset, env = d3rlpy.datasets.get_dataset("cartpole-random")
```

1.7.2 Pretrain with Dataset

```
# setup algorithm
dqn = d3rlpy.algos.DQNConfig().create()

# start offline training
dqn.fit(dataset, n_steps=1000000)
```

1.7.3 Finetune with Environment

```
# setup experience replay buffer
buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

# setup exploration strategy if necessary
explorer = d3rlpy.algos.ConstantEpsilonGreedy(0.1)

# start finetuning
dqn.fit_online(env, buffer, explorer, n_steps=1000000)
```

1.7.4 Finetune with Saved Policy

If you want to finetune the saved policy, that's also easy to do with d3rlpy.

```
# setup algorithm
dqn = d3rlpy.load_learnable("dqn_model.d3")

# start finetuning
dqn.fit_online(env, buffer, explorer, n_steps=1000000)
```

1.7.5 Finetune with Different Algorithm

If you want to finetune the saved policy trained offline with online RL algorithms, you can do it in an out-of-the-box way.

```
# setup offline RL algorithm
cql = d3rlpy.algos.DiscreteCQLConfig().create()

# train offline
cql.fit(dataset, n_steps=1000000)
```

(continues on next page)

(continued from previous page)

```
# transfer to DQN
dqn = d3rlpy.algos.DQNConfig().create()
dqn.build_with_env(env)
dqn.copy_q_function_from(cql)

# start finetuning
dqn.fit_online(env, buffer, explorer, n_steps=1000000)
```

In actor-critic cases, you should also transfer the policy function.

```
# offline RL
cql = d3rlpy.algos.CQLConfig().create()
cql.fit(dataset, n_steps=1000000)

# transfer to SAC
sac = d3rlpy.algos.SACConfig().create()
sac.build_with_env(env)
sac.copy_q_function_from(cql)
sac.copy_policy_from(cql)

# online RL
sac.fit_online(env, buffer, n_steps=1000000)
```

1.8 Offline Policy Selection

d3rlpy supports offline policy selection by training Fitted Q Evaluation (FQE), which is an offline on-policy RL algorithm. The use of FQE for offline policy selection is proposed by [Paine et al.](#). The concept is that FQE trains Q-function with the trained policy in on-policy manner so that the learned Q-function reflects the expected return of the trained policy. By using the Q-value estimation of FQE, the candidate trained policies can be ranked only with offline dataset. Check *Off-Policy Evaluation* for more information.

Note: Offline policy selection with FQE is confirmed that it usually works out with discrete action-space policies. However, it seems require some hyperparameter tuning for ranking continuous action-space policies. The more techniques will be supported along with the advancement of this research domain.

1.8.1 Prepare trained policies

In this tutorial, let's train DQN with the built-in CartPole-v0 dataset.

```
import d3rlpy

# setup replay CartPole-v0 dataset and environment
dataset, env = d3rlpy.datasets.get_dataset("cartpole-replay")


# setup algorithm
dqn = d3rlpy.algos.DQNConfig().create()
```

(continues on next page)

(continued from previous page)

```
# start offline training
dqn.fit(
    dataset,
    n_steps=100000,
    n_steps_per_epoch=10000,
    scorers={
        "environment": d3rlpy.metrics.EnvironmentEvaluator(env),
    },
)
```

Here is the example result of online evaluation.

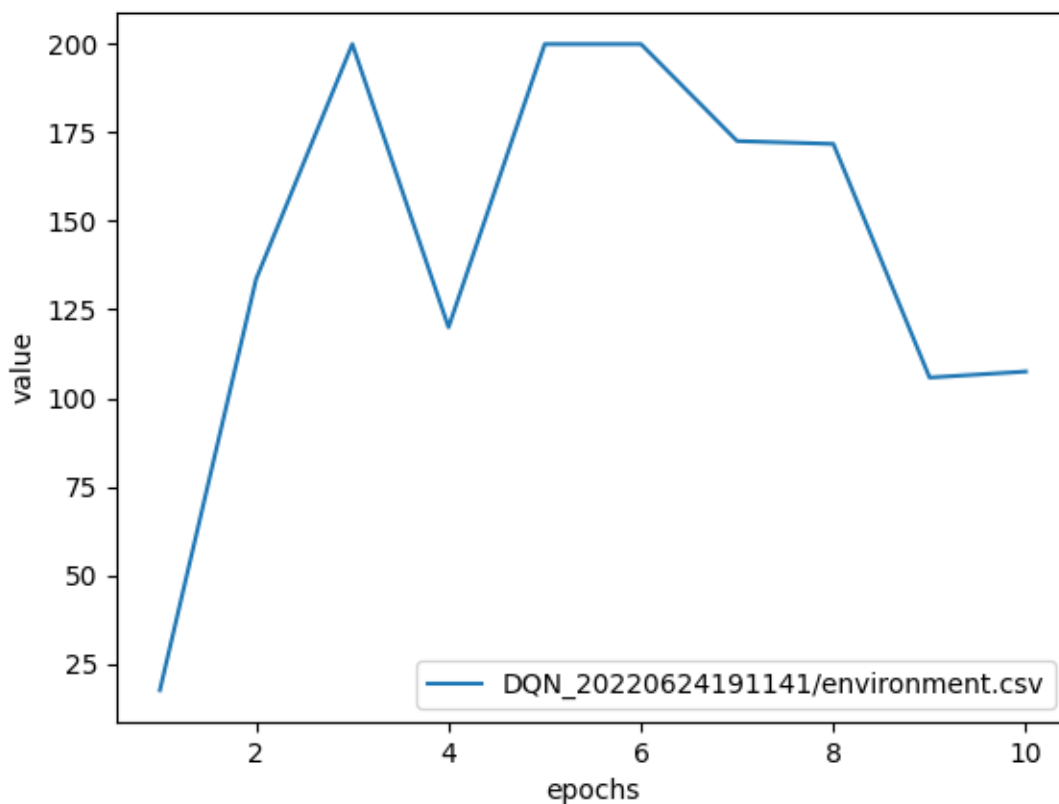

1.8.2 Train FQE with the trained policies

Next, we train FQE algorithm with the trained policies. Please note that we use `initial_state_value_estimation_scorer` and `soft_opc_scorer` proposed in [Paine et al.](#) `initial_state_value_estimation_scorer` computes the mean action-value estimation at the initial states. Thus, if this value for a certain policy is bigger than others, the policy is expected to obtain the higher episode return. On the other hand, `soft_opc_scorer` computes the mean difference between the action-value estimation for the success episodes and the action-value estimation for the all episodes. If this value for a certain policy is bigger than others, the learned Q-function can clearly tell the difference between the success episodes and others.

```

import d3rlpy

# setup the same dataset used in policy training
dataset, _ = d3rlpy.datasets.get_dataset("cartpole-replay")


# load pretrained policy
dqn = d3rlpy.load_learnable("d3rlpy_logs/DQN_20220624191141/model_100000.d3")

# setup FQE algorithm
fqe = d3rlpy.ope.DiscreteFQE(algo=dqn, config=d3rlpy.ope.DiscreteFQEConfig())


# start FQE training
fqe.fit(
    dataset,
    n_steps=10000,
    n_steps_per_epoch=1000,
    scorers={
        "init_value": d3rlpy.metrics.InitialStateValueEstimationEvaluator(),
        "soft_opc": d3rlpy.metrics.SoftOPCEvaluator(180), # set 180 for success return_
        ↪ threshold here
    },
)

```

In this example, the policies from epoch 10, epoch 5 and epoch 1 (evaluation episode returns of 107.5, 200.0 and 17.5 respectively) are compared. The first figure represents the `init_value` metrics during FQE training. As you can see here, the scale of `init_value` has correlation with the ranks of evaluation episode returns.

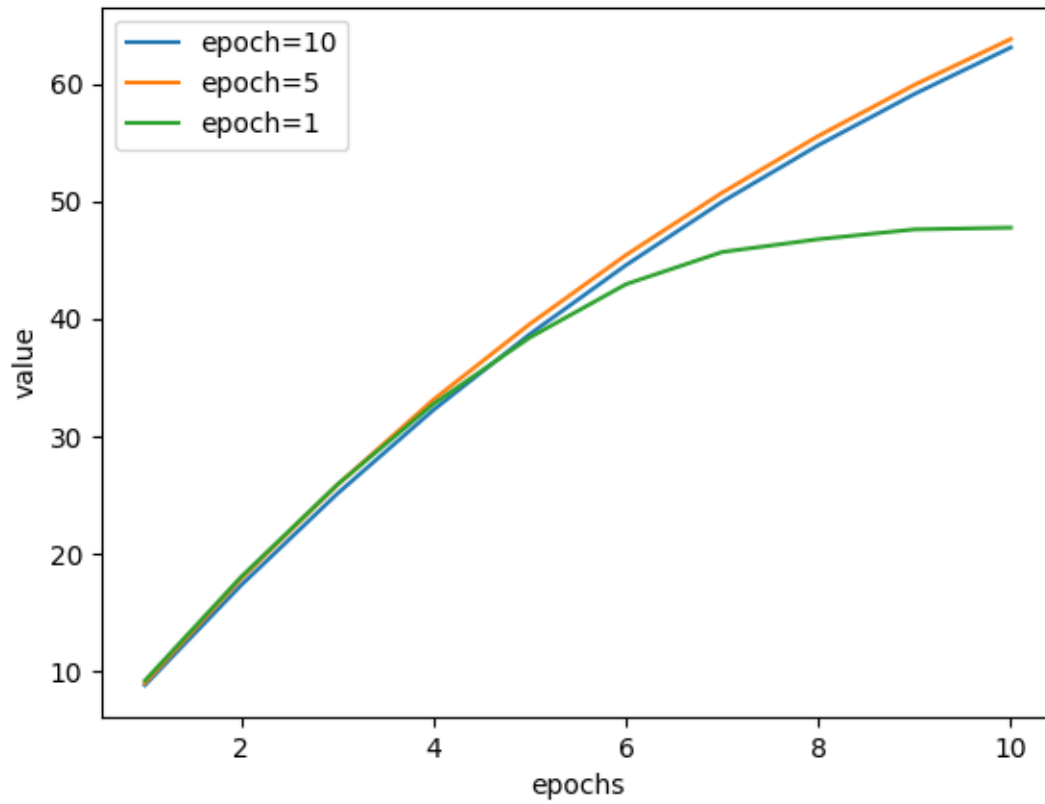

The second figure represents the `soft_opc` metrics during FQE training. These curves also have correlation with the ranks of evaluation episode returns.

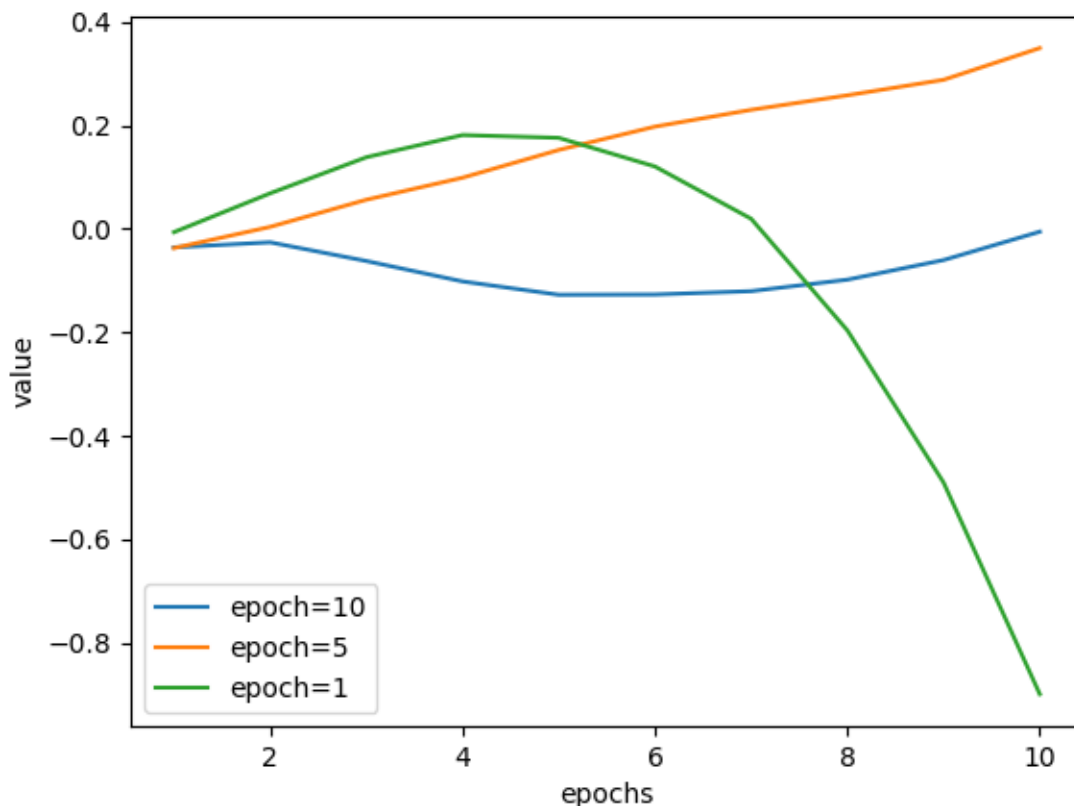

Please note that there is usually no convergence in offline RL training due to the non-fixed bootstrapped target.

1.9 Use Distributional Q-Function

The one of the unique features in d3rlpy is to use distributional Q-functions with arbitrary d3rlpy algorithms. The distributional Q-functions are powerful and potentially capable of improving performance of any algorithms. In this tutorial, you can learn how to use them. Check [Q Functions](#) for more information.

```
# default standard Q-function
mean_q_function = d3rlpy.models.MeanQFunctionFactory()
sac = d3rlpy.algos.SACConfig(q_func_factory=mean_q_function).create()

# Quantile Regression Q-function
qr_q_function = d3rlpy.models.QRQFunctionFactory(n_quantiles=200)
sac = d3rlpy.algos.SACConfig(q_func_factory=qr_q_function).create()

# Implicit Quantile Network Q-function
iqn_q_function = d3rlpy.models.IQNQFunctionFactory(
    n_quantiles=32,
    n_greedy_quantiles=64,
    embed_size=64,
)
```

(continues on next page)

```
sac = d3rlpy.algos.SACConfig(q_func_factory=iqn_q_function).create()
```

1.10 After Training Policies (Save and Load)

This page provides answers to frequently asked questions about how to use the trained policies with your environment.

1.10.1 Prepare Pretrained Policies

```
import d3rlpy

# prepare dataset and environment
dataset, env = d3rlpy.datasets.get_dataset('pendulum-random')

# setup algorithm
cql_old = d3rlpy.algos.CQLConfig().create(device="cuda:0")

# start offline training
cql_old.fit(dataset, n_steps=1000000)
```

1.10.2 Load Trained Policies

```
# Option 1: Load d3 file

# save d3 file
cql_old.save("model.d3")
# reconstruct full setup from a d3 file
cql = d3rlpy.load_learnable("model.d3")

# Option 2: Load pt file

# save pt file
cql_old.save_model("model.pt")
# setup algorithm manually
cql = d3rlpy.algos.CQLConfig().create()

# choose one of three to build PyTorch models

# if you have MDPDataset object
cql.build_with_dataset(dataset)
# or if you have Gym-styled environment object
cql.build_with_env(env)
# or manually set observation shape and action size
cql.create_impl((3,), 1)

# load pretrained model
cql.load_model("model.pt")
```

1.10.3 Inference

Now, you can use `predict` method to infer the actions. Please note that the observation MUST have the batch dimension.

```
import numpy as np

# make sure that the observation has the batch dimension
observation = np.random.random((1, 3))

# infer the action
action = cql.predict(observation)
assert action.shape == (1, 1)
```

You can manually make the policy interact with the environment.

```
observation = env.reset()
while True:
    action = cql.predict([observation])[0]
    observation, reward, done, _ = env.step(action)
    if done:
        break
```

1.10.4 Export Policies as TorchScript

Alternatively, you can export the trained policy as TorchScript format. The advantage of the TorchScript format is that the exported policy can be used by not only Python programs, but also C++ programs, which would be useful for robotics integration. Another merit is that the trained policy depends only on PyTorch so that you don't need to install d3rlpy at production.

```
# export as TorchScript
cql.save_policy("policy.pt")

import torch

# load TorchScript policy
policy = torch.jit.load("policy.pt")

# infer the action
action = policy(torch.rand(1, 3))
assert action.shape == (1, 1)
```

1.10.5 Export Policies as ONNX

Alternatively, you can also export the trained policy as ONNX. ONNX is a widely used machine learning model format that is supported by numerous programming languages.

```
# export as ONNX
cql.save_policy("policy.onnx")

import onnxruntime as ort

# load ONNX policy via onnxruntime
ort_session = ort.InferenceSession('policy.onnx', providers=["CpuExecutionProvider"])

# observation
observation = np.random.rand(1, 3).astype(np.float32)

# returns greedy action
action = ort_session.run(None, {'input_0': observation})
assert action.shape == (1, 1)
```


JUPYTER NOTEBOOKS

- [CartPole](#)
- [CartPole \(online\)](#)
- [Discrete Control with Atari](#)
- [TPU Example](#)

SOFTWARE DESIGN

In this page, the software design of d3rlpy is explained.

3.1 MDPDataset

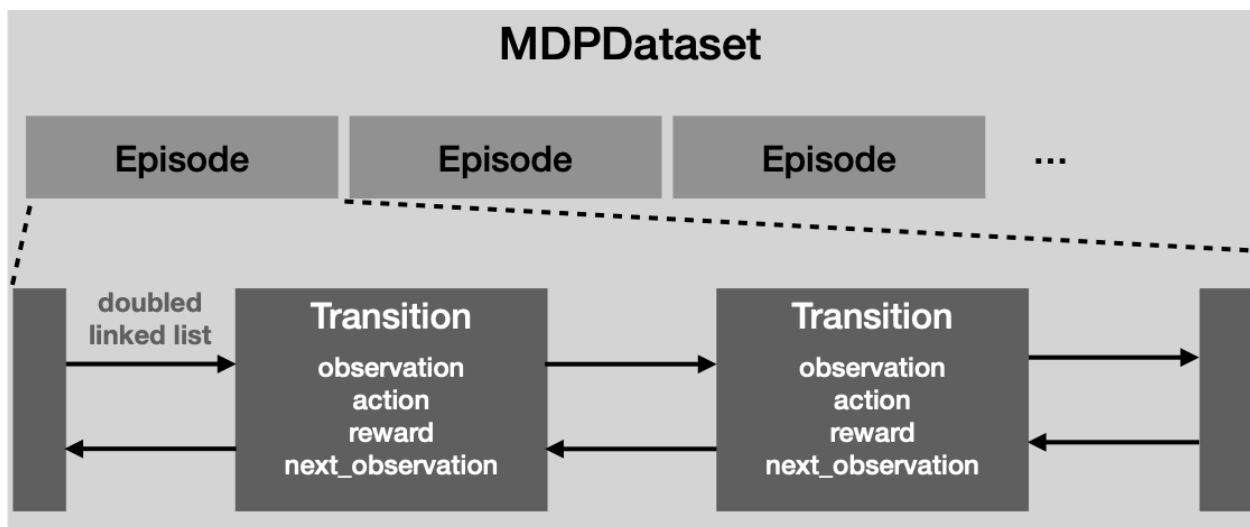


MDPDataset is a dedicated dataset structure for offline RL. **MDPDataset** automatically structures dataset based on **Episode** and **Transition**. **Episode** represents a single episode that includes multiple **Transition** objects collected in the episode. **Transition** represents a single tuple experience that consists of **observation**, **action**, **reward** and **next_observation**.

The advantage of this design is that you can split train and test datasets in an episode-wise manner. This feature is specifically useful for the offline RL training since holding out a continuous sequence of data is more making sense unlike a non-sequential supervised training such as ImageNet classification models.

Regarding the engineering perspective, the underlying transition data is implemented by Cython, a Python-like language compiled to C language, to reduce the computational costs for the memory copies. This Cythonized implementation especially speeds up the cumulative returns for multi-step learning and frame-stacking for pixel observations.

Please check [tutorials/play_with_mdp_dataset](#) for the tutorial and [Replay Buffer](#) for the API reference.

3.2 Algorithm

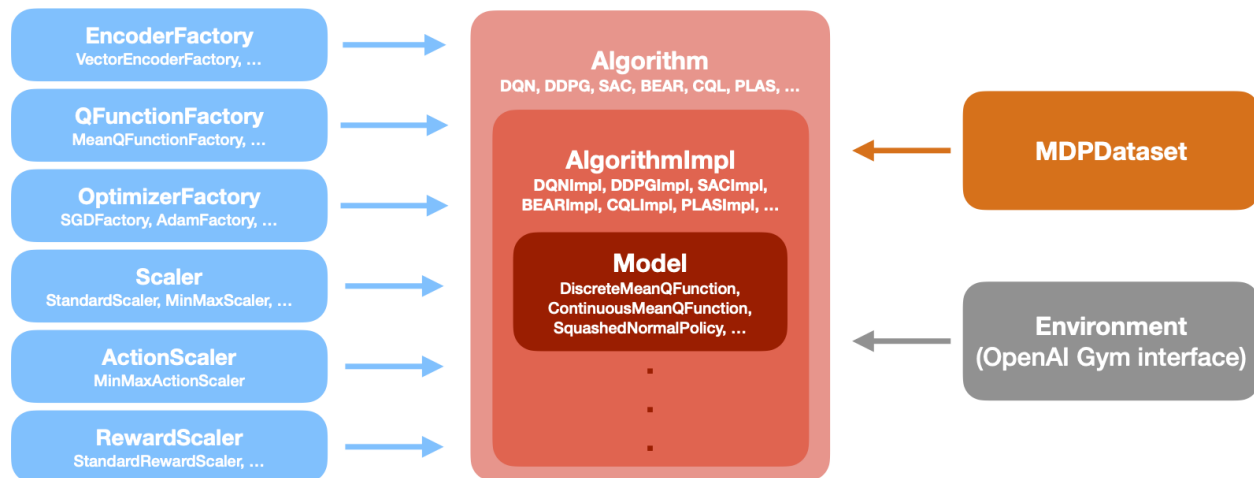

The implemented algorithms are designed as above. The algorithm objects have a hierarchical structure where `Algorithm` provides the high-level API (e.g. `fit` and `fit_online`) for users and `AlgorithmImpl` provides the low-level API (e.g. `update_actor` and `update_critic`) used in the high-level API. The advantage of this design is to maximize the reusability of algorithm logics. For example, *delayed policy update* proposed in TD3 reduces the update frequency of the policy function. This mechanism can be implemented by changing the frequency of `update_actor` method calls in `Algorithm` layer without changing the underlying logics.

`Algorithm` class takes multiple components that configure the training. These are the links to the API reference.

Table 1: Algorithm Components

Name	Reference
Algorithm	Algorithms
EncoderFactory	Network Architectures
QFunctionFactory	Q Functions
OptimizerFactory	Optimizers
ObservationScaler	Preprocessing
ActionScaler	Preprocessing
RewardScaler	Preprocessing

API REFERENCE

4.1 Algorithms

d3rlpy provides state-of-the-art offline deep reinforcement learning algorithms as well as online algorithms for the base implementations.

Each algorithm provides its config class and you can instantiate it with specifying a device to use.

```
import d3rlpy

# instantiate algorithm with CPU
sac = d3rlpy.algos.SACConfig().create(device="cpu:0")
# instantiate algorithm with GPU
sac = d3rlpy.algos.SACConfig().create(device="cuda:0")
# instantiate algorithm with the 2nd GPU
sac = d3rlpy.algos.SACConfig().create(device="cuda:1")
```

You can also check advanced use cases at [examples](#) directory.

4.1.1 Base

LearnableBase

The base class of all algorithms.

```
class d3rlpy.base.LearnableBase(config, device, impl=None)
    Bases: Generic[d3rlpy.base.TImpl_co, d3rlpy.base.TConfig_co]

    property action_scaler: Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]
        Preprocessing action scaler.

        Returns preprocessing action scaler.

        Return type Optional[ActionScaler]

    property action_size: Optional[int]
        Action size.

        Returns action size.

        Return type Optional[int]

    property batch_size: int
        Batch size to train.
```

Returns batch size.

Return type `int`

build_with_dataset(*dataset*)

Instantiate implementation object with ReplayBuffer object.

Parameters **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – dataset.

Return type `None`

build_with_env(*env*)

Instantiate implementation object with OpenAI Gym object.

Parameters **env** (`Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]`) – gym-like environment.

Return type `None`

property config: `d3rlpy.base.TConfig_co`

`Config`.

Returns config.

Return type `LearnableConfig`

create_impl(*observation_shape*, *action_size*)

Instantiate implementation objects with the dataset shapes.

This method will be used internally when *fit* method is called.

Parameters

- **observation_shape** (`Union[Sequence[int], Sequence[Sequence[int]]]`) – observation shape.
- **action_size** (`int`) – dimension of action-space.

Return type `None`

classmethod from_json(*fname*, *device=False*)

Construct algorithm from params.json file.

```
from d3rlpy.algos import CQL

cql = CQL.from_json("<path-to-json>", device='cuda:0')
```

Parameters

- **fname** (`str`) – path to params.json
- **device** (`Union[int, str, bool]`) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `typing_extensions.Self`

property gamma: `float`

Discount factor.

Returns discount factor.

Return type `float`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type d3rlpy.constants.ActionSpace

property grad_step: int

Total gradient step counter.

This value will keep counting after `fit` and `fit_online` methods finish.

Returns total gradient step counter.

property impl: Optional[d3rlpy.base.TImpl_co]

Implementation object.

Returns implementation object.

Return type Optional[ImplBase]

load_model(fname)

Load neural network parameters.

```
algo.load_model('model.pt')
```

Parameters `fname` (*str*) – source file path.

Return type *None*

property observation_scaler:

Optional[d3rlpy.preprocessing.observation_scalers.ObservationScaler]

Preprocessing observation scaler.

Returns preprocessing observation scaler.

Return type Optional[ObservationScaler]

property observation_shape: Optional[Union[Sequence[int], Sequence[Sequence[int]]]]

Observation shape.

Returns observation shape.

Return type Optional[Sequence[int]]

property reward_scaler: Optional[d3rlpy.preprocessing.reward_scalers.RewardScaler]

Preprocessing reward scaler.

Returns preprocessing reward scaler.

Return type Optional[RewardScaler]

save(fname)

Saves paired data of neural network parameters and serialized config.

```
algo.save('model.d3')

# reconstruct everything
algo2 = d3rlpy.load_learnable("model.d3", device="cuda:0")
```

Parameters `fname` (*str*) – destination file path.

Return type *None*

save_model(*fname*)

Saves neural network parameters.

```
algo.save_model('model.pt')
```

Parameters *fname* (*str*) – destination file path.

Return type *None*

set_grad_step(*grad_step*)

Set total gradient step counter.

This method can be used to restart the middle of training with an arbitrary gradient step counter, which has effects on periodic functions such as the target update.

Parameters *grad_step* (*int*) – total gradient step counter.

Return type *None*

4.1.2 Q-learning

QLearningAlgoBase

The base class of Q-learning algorithms.

class d3rlpy.algos.QLearningAlgoBase(*config, device, impl=None*)

Bases: [Generic](#)[d3rlpy.algos.qlearning.base.TQLearningImpl, d3rlpy.algos.qlearning.base.TQLearningConfig], [d3rlpy.base.LearnableBase](#)[d3rlpy.algos.qlearning.base.TQLearningImpl, d3rlpy.algos.qlearning.base.TQLearningConfig]

collect(*env, buffer=None, explorer=None, deterministic=False, n_steps=1000000, show_progress=True*)

Collects data via interaction with environment.

If buffer is not given, ReplayBuffer will be internally created.

Parameters

- **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Fym-like environment.
- **buffer** (*Optional[d3rlpy.dataset.replay_buffer.ReplayBuffer]*) – Replay buffer.
- **explorer** (*Optional[d3rlpy.algos.qlearning.explorers.Explorer]*) – Action explorer.
- **deterministic** (*bool*) – Flag to collect data with the greedy policy.
- **n_steps** (*int*) – Number of total steps to train.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.

Returns Replay buffer with the collected data.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

copy_policy_from(*algo*)

Copies policy parameters from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_from(cql)
```

Parameters `algo` (d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]) – Algorithm object.

Return type `None`

copy_policy_optim_from(*algo*)

Copies policy optimizer states from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_optim_from(cql)
```

Parameters `algo` (d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]) – Algorithm object.

Return type `None`

copy_q_function_from(*algo*)

Copies Q-function parameters from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_q_function_from(cql)
```

Parameters `algo` (d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]) – Algorithm object.

Return type `None`

copy_q_function_optim_from(*algo*)

Copies Q-function optimizer states from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_optim_from(cql)
```

Parameters `algo` (`d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]`) – Algorithm object.

Return type `None`

fit(`dataset`, `n_steps`, `n_steps_per_epoch=10000`, `experiment_name=None`, `with_timestamp=True`, `logging_steps=500`, `logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>`, `logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>`, `show_progress=True`, `save_interval=1`, `evaluators=None`, `callback=None`, `epoch_callback=None`, `enable_ddp=False`)
Trains with given dataset.

```
algo.fit(episodes, n_steps=1000000)
```

Parameters

- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – ReplayBuffer object.
- **n_steps** (`int`) – Number of steps to train.
- **n_steps_per_epoch** (`int`) – Number of steps per epoch. This value will be ignored when `n_steps` is `None`.
- **experiment_name** (`Optional[str]`) – Experiment name for logging. If not passed, the directory name will be `{class name}_{timestamp}`.
- **with_timestamp** (`bool`) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (`int`) – Number of steps to log metrics. This will be ignored if `logging_strategy` is `EPOCH`.
- **logging_strategy** (`d3rlpy.constants.LoggingStrategy`) – Logging strategy to use.
- **logger_adapter** (`d3rlpy.logging.logger.LoggerAdapterFactory`) – LoggerAdapterFactory object.
- **show_progress** (`bool`) – Flag to show progress bar for iterations.
- **save_interval** (`int`) – Interval to save parameters.
- **evaluators** (`Optional[Dict[str, d3rlpy.metrics.evaluators.EvaluatorProtocol]]`) – List of evaluators.
- **callback** (`Optional[Callable[[typing_extensions.Self, int, int], None]]`) – Callable function that takes (`algo`, `epoch`, `total_step`), which is called every step.
- **epoch_callback** (`Optional[Callable[[typing_extensions.Self, int, int], None]]`) – Callable function that takes (`algo`, `epoch`, `total_step`), which is called at the end of every epoch.

- **enable_ddp** (*bool*) – Flag to wrap models with DataDistributedParallel.

Returns List of result tuples (epoch, metrics) per epoch.

Return type List[Tuple[int, Dict[str, float]]]

```
fit_online(env, buffer=None, explorer=None, n_steps=1000000, n_steps_per_epoch=10000,
            update_interval=1, update_start_step=0, random_steps=0, eval_env=None, eval_epsilon=0.0,
            save_interval=1, experiment_name=None, with_timestamp=True, logging_steps=500,
            logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>,
            logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>,
            show_progress=True, callback=None)
```

Start training loop of online deep reinforcement learning.

Parameters

- **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym-like environment.
- **buffer** (*Optional[d3rlpy.dataset.replay_buffer.ReplayBuffer]*) – Replay buffer.
- **explorer** (*Optional[d3rlpy.algos.qlearning.explorers.Explorer]*) – Action explorer.
- **n_steps** (*int*) – Number of total steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch.
- **update_interval** (*int*) – Number of steps per update.
- **update_start_step** (*int*) – Steps before starting updates.
- **random_steps** (*int*) – Steps for the initial random exploration.
- **eval_env** (*Optional[Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]]*) – Gym-like environment. If None, evaluation is skipped.
- **eval_epsilon** (*float*) – ϵ -greedy factor during evaluation.
- **save_interval** (*int*) – Number of epochs before saving models.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be {class name}_online_{timestamp}.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if logging_strategy is EPOCH.
- **logging_strategy** (*d3rlpy.constants.LoggingStrategy*) – Logging strategy to use.
- **logger_adapter** (*d3rlpy.logging.logger.LoggerAdapterFactory*) – Logger-AdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called at the end of epochs.

Return type *None*

```
fitter(dataset, n_steps, n_steps_per_epoch=10000, logging_steps=500,  
       logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>, experiment_name=None,  
       with_timestamp=True, logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>,  
       show_progress=True, save_interval=1, evaluators=None, callback=None, epoch_callback=None,  
       enable_ddp=False)
```

Iterate over epochs steps to train with the given dataset. At each iteration algo methods and properties can be changed or queried.

```
for epoch, metrics in algo.fitter(isodes):  
    my_plot(metrics)  
    algo.save_model(my_path)
```

Parameters

- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – Offline dataset to train.
- **n_steps** (*int*) – Number of steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch. This value will be ignored when `n_steps` is None.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be `{class name}_{timestamp}`.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if `logging_strategy` is EPOCH.
- **logging_strategy** (`d3rlpy.constants.LoggingStrategy`) – Logging strategy to use.
- **logger_adapter** (`d3rlpy.logging.logger.LoggerAdapterFactory`) – LoggerAdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **save_interval** (*int*) – Interval to save parameters.
- **evaluators** (*Optional[Dict[str, d3rlpy.metrics.evaluators.EvaluatorProtocol]]*) – List of evaluators.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called every step.
- **epoch_callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called at the end of every epoch.
- **enable_ddp** (*bool*) – Flag to wrap models with `DataDistributedParallel`.

Returns Iterator yielding current epoch and metrics dict.

Return type `Generator[Tuple[int, Dict[str, float]], None, None]`

predict(*x*)

Returns greedy actions.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

actions = algo.predict(x)
# actions.shape == (100, action size) for continuous control
# actions.shape == (100,) for discrete control
```

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations

Returns Greedy actions

Return type `numpy.ndarray`[Any, `numpy.dtype`[Any]]

predict_value(*x, action*)

Returns predicted action-values.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

# for continuous control
# 100 actions with shape of (2,)
actions = np.random.random((100, 2))

# for discrete control
# 100 actions in integer values
actions = np.random.randint(2, size=100)

values = algo.predict_value(x, actions)
# values.shape == (100,)
```

Parameters

- **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations
- **action** (`numpy.ndarray`[Any, `numpy.dtype`[Any]]) – Actions

Returns Predicted action-values

Return type `numpy.ndarray`[Any, `numpy.dtype`[Any]]

reset_optimizer_states()

Resets optimizer states.

This is especially useful when fine-tuning policies with setting initial optimizer states.

Return type `None`

sample_action(*x*)

Returns sampled actions.

The sampled actions are identical to the output of *predict* method if the policy is deterministic.

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations.

Returns Sampled actions.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

save_policy(*fname*)

Save the greedy-policy computational graph as TorchScript or ONNX.

The format will be automatically detected by the file name.

```
# save as TorchScript
algo.save_policy('policy.pt')

# save as ONNX
algo.save_policy('policy.onnx')
```

The artifacts saved with this method will work without d3rlpy. This method is especially useful to deploy the learned policy to production environments or embedding systems.

See also

- https://pytorch.org/tutorials/beginner/Intro_to_TorchScript_tutorial.html (for Python).
- https://pytorch.org/tutorials/advanced/cpp_export.html (for C++).
- <https://onnx.ai> (for ONNX)

Parameters *fname* (*str*) – Destination file path.

Return type `None`

update(*batch*)

Update parameters with mini-batch of data.

Parameters *batch* (`d3rlpy.dataset.mini_batch.TransitionMiniBatch`) – Mini-batch data.

Returns Dictionary of metrics.

Return type `Dict[str, float]`

BC

```
class d3rlpy.algos.BCConfig(batch_size=100, gamma=0.99, observation_scaler=None, action_scaler=None,
                             reward_scaler=None, learning_rate=0.001, policy_type='deterministic',
                             optim_factory=<factory>, encoder_factory=<factory>)
```

Bases: `d3rlpy.base.LearnableConfig`

Config of Behavior Cloning algorithm.

Behavior Cloning (BC) is to imitate actions in the dataset via a supervised learning approach. Since BC is only imitating action distributions, the performance will be close to the mean of the dataset even though BC mostly works better than online RL algorithms.

$$L(\theta) = \mathbb{E}_{a_t, s_t \sim D} [(a_t - \pi_{\theta}(s_t))^2]$$

Parameters

- **learning_rate** (*float*) – Learning rate.
- **optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory.
- **encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory.

- **batch_size** (*int*) – Mini-batch size.
- **policy_type** (*str*) – the policy type. Available options are ['deterministic', 'stochastic'].
- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **gamma** (*float*) –
- **reward_scaler** (*Optional[d3rlpy.preprocessing.reward_scalers.RewardScaler]*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.bc.BC*

class *d3rlpy.algos.BC*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.bc_impl.BCBaseImpl, d3rlpy.algos.qlearning.bc.BCConfig]*

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

DiscreteBC

class *d3rlpy.algos.DiscreteBCConfig*(*batch_size=100, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, learning_rate=0.001, optim_factory=<factory>, encoder_factory=<factory>, beta=0.5*)

Bases: *d3rlpy.base.LearnableConfig*

Config of Behavior Cloning algorithm for discrete control.

Behavior Cloning (BC) is to imitate actions in the dataset via a supervised learning approach. Since BC is only imitating action distributions, the performance will be close to the mean of the dataset even though BC mostly works better than online RL algorithms.

$$L(\theta) = \mathbb{E}_{a_t, s_t \sim D} \left[- \sum_a p(a|s_t) \log \pi_\theta(a|s_t) \right]$$

where $p(a|s_t)$ is implemented as a one-hot vector.

Parameters

- **learning_rate** (*float*) – Learning rate.
- **optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory.

- **encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory.
- **batch_size** (*int*) – Mini-batch size.
- **beta** (*float*) – Regularization factor.
- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **gamma** (*float*) –
- **action_scaler** (*Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]*) –
- **reward_scaler** (*Optional[d3rlpy.preprocessing.reward_scalers.RewardScaler]*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters *device* (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.bc.DiscreteBC*

class *d3rlpy.algos.DiscreteBC*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.bc_impl.BCBaseImpl, d3rlpy.algos.qlearning.bc.DiscreteBCConfig]*

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

NFQ

class *d3rlpy.algos.NFQConfig*(*batch_size=32, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, learning_rate=6.25e-05, optim_factory=<factory>, encoder_factory=<factory>, q_func_factory=<factory>, n_critics=1*)

Bases: *d3rlpy.base.LearnableConfig*

Config of Neural Fitted Q Iteration algorithm.

This NFQ implementation in d3rlpy is practically same as DQN, but excluding the target network mechanism.

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(r_{t+1} + \gamma \max_a Q_{\theta'}(s_{t+1}, a) - Q_{\theta}(s_t, a_t))^2]$$

where θ' is the target network parameter. The target network parameter is synchronized every *target_update_interval* iterations.

References

- Riedmiller., Neural Fitted Q Iteration - first experiences with a data efficient neural reinforcement learning method.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **learning_rate** (*float*) – Learning rate.
- **optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory.
- **encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **action_scaler** (*Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.nfq.NFQ*

class *d3rlpy.algos.NFQ*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase*[*d3rlpy.algos.qlearning.torch.dqn_impl.DQNImpl, d3rlpy.algos.qlearning.nfq.NFQConfig*]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

DQN

```
class d3rlpy.algos.DQNConfig(batch_size=32, gamma=0.99, observation_scaler=None, action_scaler=None,
                             reward_scaler=None, learning_rate=6.25e-05, optim_factory=<factory>,
                             encoder_factory=<factory>, q_func_factory=<factory>, n_critics=1,
                             target_update_interval=8000)
```

Bases: `d3rlpy.base.LearnableConfig`

Config of Deep Q-Network algorithm.

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(r_{t+1} + \gamma \max_a Q_{\theta'}(s_{t+1}, a) - Q_{\theta}(s_t, a_t))^2]$$

where θ' is the target network parameter. The target network parameter is synchronized every `target_update_interval` iterations.

References

- Mnih et al., Human-level control through deep reinforcement learning.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **learning_rate** (`float`) – Learning rate.
- **optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory.
- **encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (`int`) – Mini-batch size.
- **gamma** (`float`) – Discount factor.
- **n_critics** (`int`) – Number of Q functions for ensemble.
- **target_update_interval** (`int`) – Interval to update the target network.
- **action_scaler** (`Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]`) –

Return type `None`

create(`device=False`)

Returns algorithm object.

Parameters `device` (`Union[int, str, bool]`) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.dqn.DQN`

```
class d3rlpy.algos.DQN(config, device, impl=None)
    Bases: d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.dqn\_impl.DQNImpl, d3rlpy.algos.qlearning.dqn.DQNConfig]

    get_action_type()
        Returns action type (continuous or discrete).

        Returns action type.

        Return type d3rlpy.constants.ActionSpace
```

DoubleDQN

```
class d3rlpy.algos.DoubleDQNConfig(batch_size=32, gamma=0.99, observation_scaler=None,
                                   action_scaler=None, reward_scaler=None, learning_rate=6.25e-05,
                                   optim_factory=<factory>, encoder_factory=<factory>,
                                   q_func_factory=<factory>, n_critics=1,
                                   target_update_interval=8000)

    Bases: d3rlpy.algos.qlearning.dqn.DQNConfig

    Config of Double Deep Q-Network algorithm.

    The difference from DQN is that the action is taken from the current Q function instead of the target Q function.
    This modification significantly decreases overestimation bias of TD learning.
```

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(r_{t+1} + \gamma Q_{\theta'}(s_{t+1}, \operatorname{argmax}_a Q_{\theta}(s_{t+1}, a)) - Q_{\theta}(s_t, a_t))^2]$$

where θ' is the target network parameter. The target network parameter is synchronized every *target_update_interval* iterations.

References

- [Hasselt et al., Deep reinforcement learning with double Q-learning.](#)

Parameters

- **observation_scaler** ([d3rlpy.preprocessing.ObservationScaler](#)) – Observation preprocessor.
- **reward_scaler** ([d3rlpy.preprocessing.RewardScaler](#)) – Reward preprocessor.
- **learning_rate** (*float*) – Learning rate.
- **optim_factory** ([d3rlpy.models.optimizers.OptimizerFactory](#)) – Optimizer factory.
- **encoder_factory** ([d3rlpy.models.encoders.EncoderFactory](#)) – Encoder factory.
- **q_func_factory** ([d3rlpy.models.q_functions.QFunctionFactory](#)) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **n_critics** (*int*) – Number of Q functions.
- **target_update_interval** (*int*) – Interval to synchronize the target network.
- **action_scaler** (*Optional*[[d3rlpy.preprocessing.action_scalers.ActionScaler](#)]) –

Return type `None`

create(*device=False*)

Returns algorithm object.

Parameters **device** (`Union[int, str, bool]`) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.dqn.DoubleDQN`

class `d3rlpy.algos.DoubleDQN`(*config, device, impl=None*)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.dqn_impl.DQNImpl, d3rlpy.algos.qlearning.dqn.DQNConfig]`

DDPG

class `d3rlpy.algos.DDPGConfig`(*batch_size=256, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, actor_learning_rate=0.0003, critic_learning_rate=0.0003, actor_optim_factory=<factory>, critic_optim_factory=<factory>, actor_encoder_factory=<factory>, critic_encoder_factory=<factory>, q_func_factory=<factory>, tau=0.005, n_critics=1*)

Bases: `d3rlpy.base.LearnableConfig`

Config of Deep Deterministic Policy Gradients algorithm.

DDPG is an actor-critic algorithm that trains a Q function parametrized with θ and a policy function parametrized with ϕ .

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} \left[(r_{t+1} + \gamma Q_{\theta'}(s_{t+1}, \pi_{\phi'}(s_{t+1})) - Q_{\theta}(s_t, a_t))^2 \right]$$
$$J(\phi) = \mathbb{E}_{s_t \sim D} \left[Q_{\theta}(s_t, \pi_{\phi}(s_t)) \right]$$

where θ' and ϕ are the target network parameters. There target network parameters are updated every iteration.

$$\theta' \leftarrow \tau \theta + (1 - \tau) \theta'$$
$$\phi' \leftarrow \tau \phi + (1 - \tau) \phi'$$

References

- Silver et al., [Deterministic policy gradient algorithms](#).
- Lillicrap et al., [Continuous control with deep reinforcement learning](#).

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **action_scaler** (`d3rlpy.preprocessing.ActionScaler`) – Action preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **actor_learning_rate** (`float`) – Learning rate for policy function.
- **critic_learning_rate** (`float`) – Learning rate for Q function.

- **actor_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the actor.
- **critic_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the critic.
- **actor_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the actor.
- **critic_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the critic.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (`int`) – Mini-batch size.
- **gamma** (`float`) – Discount factor.
- **tau** (`float`) – Target network synchronization coefficient.
- **n_critics** (`int`) – Number of Q functions for ensemble.

Return type `None`

create(*device=False*)

Returns algorithm object.

Parameters **device** (`Union[int, str, bool]`) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.ddpg.DDPG`

class `d3rlpy.algos.DDPG`(*config, device, impl=None*)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.ddpg_impl.DDPGImpl, d3rlpy.algos.qlearning.ddpg.DDPGConfig]`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

TD3

class `d3rlpy.algos.TD3Config`(*batch_size=256, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, actor_learning_rate=0.0003, critic_learning_rate=0.0003, actor_optim_factory=<factory>, critic_optim_factory=<factory>, actor_encoder_factory=<factory>, critic_encoder_factory=<factory>, q_func_factory=<factory>, tau=0.005, n_critics=2, target_smoothing_sigma=0.2, target_smoothing_clip=0.5, update_actor_interval=2*)

Bases: `d3rlpy.base.LearnableConfig`

Config of Twin Delayed Deep Deterministic Policy Gradients algorithm.

TD3 is an improved DDPG-based algorithm. Major differences from DDPG are as follows.

- TD3 has twin Q functions to reduce overestimation bias at TD learning. The number of Q functions can be designated by `n_critics`.
- TD3 adds noise to target value estimation to avoid overfitting with the deterministic policy.
- TD3 updates the policy function after several Q function updates in order to reduce variance of action-value estimation. The interval of the policy function update can be designated by `update_actor_interval`.

$$L(\theta_i) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(r_{t+1} + \gamma \min_j Q_{\theta'_j}(s_{t+1}, \pi_{\phi'}(s_{t+1}) + \epsilon) - Q_{\theta_i}(s_t, a_t))^2]$$

$$J(\phi) = \mathbb{E}_{s_t \sim D} [\min_i Q_{\theta_i}(s_t, \pi_{\phi}(s_t))]$$

where $\epsilon \sim \text{clip}(N(0, \sigma), -c, c)$

References

- Fujimoto et al., Addressing Function Approximation Error in Actor-Critic Methods.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **action_scaler** (`d3rlpy.preprocessing.ActionScaler`) – Action preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **actor_learning_rate** (`float`) – Learning rate for a policy function.
- **critic_learning_rate** (`float`) – Learning rate for Q functions.
- **actor_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the actor.
- **critic_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the critic.
- **actor_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the actor.
- **critic_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the critic.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (`int`) – Mini-batch size.
- **gamma** (`float`) – Discount factor.
- **tau** (`float`) – Target network synchronization coefficient.
- **n_critics** (`int`) – Number of Q functions for ensemble.
- **target_smoothing_sigma** (`float`) – Standard deviation for target noise.
- **target_smoothing_clip** (`float`) – Clipping range for target noise.
- **update_actor_interval** (`int`) – Interval to update policy function described as *delayed policy update* in the paper.

Return type `None`

create(*device=False*)

Returns algorithm object.

Parameters *device* (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.td3.TD3*

class *d3rlpy.algos.TD3*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase*[*d3rlpy.algos.qlearning.torch.td3_impl.TD3Impl, d3rlpy.algos.qlearning.td3.TD3Config*]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

SAC

class *d3rlpy.algos.SACConfig*(*batch_size=256, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, actor_learning_rate=0.0003, critic_learning_rate=0.0003, temp_learning_rate=0.0003, actor_optim_factory=<factory>, critic_optim_factory=<factory>, temp_optim_factory=<factory>, actor_encoder_factory=<factory>, critic_encoder_factory=<factory>, q_func_factory=<factory>, tau=0.005, n_critics=2, initial_temperature=1.0*)

Bases: *d3rlpy.base.LearnableConfig*

Config Soft Actor-Critic algorithm.

SAC is a DDPG-based maximum entropy RL algorithm, which produces state-of-the-art performance in online RL settings. SAC leverages twin Q functions proposed in TD3. Additionally, *delayed policy update* in TD3 is also implemented, which is not done in the paper.

$$L(\theta_i) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D, a_{t+1} \sim \pi_{\phi}(\cdot | s_{t+1})} \left[(y - Q_{\theta_i}(s_t, a_t))^2 \right]$$

$$y = r_{t+1} + \gamma \left(\min_j Q_{\theta_j}(s_{t+1}, a_{t+1}) - \alpha \log(\pi_{\phi}(a_{t+1} | s_{t+1})) \right)$$

$$J(\phi) = \mathbb{E}_{s_t \sim D, a_t \sim \pi_{\phi}(\cdot | s_t)} \left[\alpha \log(\pi_{\phi}(a_t | s_t)) - \min_i Q_{\theta_i}(s_t, \pi_{\phi}(a_t | s_t)) \right]$$

The temperature parameter α is also automatically adjustable.

$$J(\alpha) = \mathbb{E}_{s_t \sim D, a_t \sim \pi_{\phi}(\cdot | s_t)} \left[-\alpha \left(\log(\pi_{\phi}(a_t | s_t)) + H \right) \right]$$

where H is a target entropy, which is defined as $\dim a$.

References

- Haarnoja et al., Soft Actor-Critic: Off-Policy Maximum Entropy Deep Reinforcement Learning with a Stochastic Actor.
- Haarnoja et al., Soft Actor-Critic Algorithms and Applications.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **temp_learning_rate** (*float*) – Learning rate for temperature parameter.
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **temp_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the temperature.
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **initial_temperature** (*float*) – Initial temperature value.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters *device* (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.sac.SAC*

```
class d3rlpy.algos.SAC(config, device, impl=None)
    Bases: d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.
    sac_impl.SACImpl, d3rlpy.algos.qlearning.sac.SACConfig]

    get_action_type()
        Returns action type (continuous or discrete).

        Returns action type.

        Return type d3rlpy.constants.ActionSpace
```

DiscreteSAC

```
class d3rlpy.algos.DiscreteSACConfig(batch_size=64, gamma=0.99, observation_scaler=None,
    action_scaler=None, reward_scaler=None,
    actor_learning_rate=0.0003, critic_learning_rate=0.0003,
    temp_learning_rate=0.0003, actor_optim_factory=<factory>,
    critic_optim_factory=<factory>, temp_optim_factory=<factory>,
    actor_encoder_factory=<factory>,
    critic_encoder_factory=<factory>, q_func_factory=<factory>,
    n_critics=2, initial_temperature=1.0,
    target_update_interval=8000)
```

Bases: `d3rlpy.base.LearnableConfig`

Config of Soft Actor-Critic algorithm for discrete action-space.

This discrete version of SAC is built based on continuous version of SAC with additional modifications.

The target state-value is calculated as expectation of all action-values.

$$V(s_t) = \pi_\phi(s_t)^T [Q_\theta(s_t) - \alpha \log(\pi_\phi(s_t))]$$

Similarly, the objective function for the temperature parameter is as follows.

$$J(\alpha) = \pi_\phi(s_t)^T [-\alpha(\log(\pi_\phi(s_t)) + H)]$$

Finally, the objective function for the policy function is as follows.

$$J(\phi) = \mathbb{E}_{s_t \sim D} [\pi_\phi(s_t)^T [\alpha \log(\pi_\phi(s_t)) - Q_\theta(s_t)]]$$

References

- [Christodoulou, Soft Actor-Critic for Discrete Action Settings.](#)

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **temp_learning_rate** (*float*) – Learning rate for temperature parameter.
- **actor_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the actor.

- **critic_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the critic.
- **temp_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the temperature.
- **actor_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the actor.
- **critic_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the critic.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **initial_temperature** (*float*) – Initial temperature value.
- **action_scaler** (*Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]*) –
- **target_update_interval** (*int*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.sac.DiscreteSAC*

class `d3rlpy.algos.DiscreteSAC`(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase*[`d3rlpy.algos.qlearning.torch.sac_impl.DiscreteSACImpl`, `d3rlpy.algos.qlearning.sac.DiscreteSACConfig`]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

BCQ

```
class d3rlpy.algos.BCQConfig(batch_size=100, gamma=0.99, observation_scaler=None,
                             action_scaler=None, reward_scaler=None, actor_learning_rate=0.001,
                             critic_learning_rate=0.001, imitator_learning_rate=0.001,
                             actor_optim_factory=<factory>, critic_optim_factory=<factory>,
                             imitator_optim_factory=<factory>, actor_encoder_factory=<factory>,
                             critic_encoder_factory=<factory>, imitator_encoder_factory=<factory>,
                             q_func_factory=<factory>, tau=0.005, n_critics=2, update_actor_interval=1,
                             lam=0.75, n_action_samples=100, action_flexibility=0.05, rl_start_step=0,
                             beta=0.5)
```

Bases: d3rlpy.base.LearnableConfig

Config of Batch-Constrained Q-learning algorithm.

BCQ is the very first practical data-driven deep reinforcement learning algorithm. The major difference from DDPG is that the policy function is represented as combination of conditional VAE and perturbation function in order to remedy extrapolation error emerging from target value estimation.

The encoder and the decoder of the conditional VAE is represented as E_ω and D_ω respectively.

$$L(\omega) = E_{s_t, a_t \sim D}[(a - \tilde{a})^2 + D_{KL}(N(\mu, \sigma) \| N(0, 1))]$$

where $\mu, \sigma = E_\omega(s_t, a_t)$, $\tilde{a} = D_\omega(s_t, z)$ and $z \sim N(\mu, \sigma)$.

The policy function is represented as a residual function with the VAE and the perturbation function represented as $\xi_\phi(s, a)$.

$$\pi(s, a) = a + \Phi \xi_\phi(s, a)$$

where $a = D_\omega(s, z)$, $z \sim N(0, 0.5)$ and Φ is a perturbation scale designated by *action_flexibility*. Although the policy is learned closely to data distribution, the perturbation function can lead to more rewarded states.

BCQ also leverages twin Q functions and computes weighted average over maximum values and minimum values.

$$L(\theta_i) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D}[(y - Q_{\theta_i}(s_t, a_t))^2]$$

$$y = r_{t+1} + \gamma \max_{a_i} [\lambda \min_j Q_{\theta'_j}(s_{t+1}, a_i) + (1 - \lambda) \max_j Q_{\theta'_j}(s_{t+1}, a_i)]$$

where $\{a_i \sim D(s_{t+1}, z), z \sim N(0, 0.5)\}_{i=1}^n$. The number of sampled actions is designated with *n_action_samples*.

Finally, the perturbation function is trained just like DDPG's policy function.

$$J(\phi) = \mathbb{E}_{s_t \sim D, a_t \sim D_\omega(s_t, z), z \sim N(0, 0.5)}[Q_{\theta_1}(s_t, \pi(s_t, a_t))]$$

At inference time, action candidates are sampled as many as *n_action_samples*, and the action with highest value estimation is taken.

$$\pi'(s) = \operatorname{argmax}_{\pi(s, a_i)} Q_{\theta_1}(s, \pi(s, a_i))$$

Note: The greedy action is not deterministic because the action candidates are always randomly sampled. This might affect *save_policy* method and the performance at production.

References

- Fujimoto et al., Off-Policy Deep Reinforcement Learning without Exploration.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **imitator_learning_rate** (*float*) – Learning rate for Conditional VAE.
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **imitator_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the conditional VAE.
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **imitator_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the conditional VAE.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **update_actor_interval** (*int*) – Interval to update policy function.
- **lam** (*float*) – Weight factor for critic ensemble.
- **n_action_samples** (*int*) – Number of action samples to estimate action-values.
- **action_flexibility** (*float*) – Output scale of perturbation function represented as Φ .
- **rl_start_step** (*int*) – Steps to start to update policy function and Q functions. If this is large, RL training would be more stabilized.
- **beta** (*float*) – KL regularization term for Conditional VAE.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters `device` (`Union[int, str, bool]`) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.bcq.BCQ`

class `d3rlpy.algos.BCQ`(`config`, `device`, `impl=None`)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.bcq_impl.BCQImpl, d3rlpy.algos.qlearning.bcq.BCQConfig]`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

DiscreteBCQ

class `d3rlpy.algos.DiscreteBCQConfig`(`batch_size=32`, `gamma=0.99`, `observation_scaler=None`, `action_scaler=None`, `reward_scaler=None`, `learning_rate=6.25e-05`, `optim_factory=<factory>`, `encoder_factory=<factory>`, `q_func_factory=<factory>`, `n_critics=1`, `action_flexibility=0.3`, `beta=0.5`, `target_update_interval=8000`, `share_encoder=True`)

Bases: `d3rlpy.base.LearnableConfig`

Config of Discrete version of Batch-Constrained Q-learning algorithm.

Discrete version takes theories from the continuous version, but the algorithm is much simpler than that. The imitation function $G_\omega(a|s)$ is trained as supervised learning just like Behavior Cloning.

$$L(\omega) = \mathbb{E}_{a_t, s_t \sim D} \left[- \sum_a p(a|s_t) \log G_\omega(a|s_t) \right]$$

With this imitation function, the greedy policy is defined as follows.

$$\pi(s_t) = \operatorname{argmax}_{a|G_\omega(a|s_t)/\max_{\tilde{a}} G_\omega(\tilde{a}|s_t) > \tau} Q_\theta(s_t, a)$$

which eliminates actions with probabilities τ times smaller than the maximum one.

Finally, the loss function is computed in Double DQN style with the above constrained policy.

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(r_{t+1} + \gamma Q_{\theta'}(s_{t+1}, \pi(s_{t+1})) - Q_\theta(s_t, a_t))^2]$$

References

- Fujimoto et al., Off-Policy Deep Reinforcement Learning without Exploration.
- Fujimoto et al., Benchmarking Batch Deep Reinforcement Learning Algorithms.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.

- **learning_rate** (*float*) – Learning rate.
- **optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory.
- **encoder_factory** (`d3rlpy.models.encoders.EncoderFactory` or *str*) – Encoder factory.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory` or *str*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **action_flexibility** (*float*) – Probability threshold represented as τ .
- **beta** (*float*) – Regularization term for imitation function.
- **target_update_interval** (*int*) – Interval to update the target network.
- **share_encoder** (*bool*) – Flag to share encoder between Q-function and imitation models.
- **action_scaler** (*Optional*[`d3rlpy.preprocessing.action_scalers.ActionScaler`]) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union*[*int*, *str*, *bool*]) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.bcq.DiscreteBCQ`

class `d3rlpy.algos.DiscreteBCQ`(*config, device, impl=None*)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase`[`d3rlpy.algos.qlearning.torch.bcq_impl.DiscreteBCQImpl`, `d3rlpy.algos.qlearning.bcq.DiscreteBCQConfig`]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

BEAR

```
class d3rlpy.algos.BEARConfig(batch_size=256, gamma=0.99, observation_scaler=None,
                             action_scaler=None, reward_scaler=None, actor_learning_rate=0.0001,
                             critic_learning_rate=0.0003, imitator_learning_rate=0.0003,
                             temp_learning_rate=0.0001, alpha_learning_rate=0.001,
                             actor_optim_factory=<factory>, critic_optim_factory=<factory>,
                             imitator_optim_factory=<factory>, temp_optim_factory=<factory>,
                             alpha_optim_factory=<factory>, actor_encoder_factory=<factory>,
                             critic_encoder_factory=<factory>, imitator_encoder_factory=<factory>,
                             q_func_factory=<factory>, tau=0.005, n_critics=2, initial_temperature=1.0,
                             initial_alpha=1.0, alpha_threshold=0.05, lam=0.75, n_action_samples=100,
                             n_target_samples=10, n_mmd_action_samples=4, mmd_kernel='laplacian',
                             mmd_sigma=20.0, vae_kl_weight=0.5, warmup_steps=40000)
```

Bases: `d3rlpy.base.LearnableConfig`

Config of Bootstrapping Error Accumulation Reduction algorithm.

BEAR is a SAC-based data-driven deep reinforcement learning algorithm.

BEAR constrains the support of the policy function within data distribution by minimizing Maximum Mean Discrepancy (MMD) between the policy function and the approximated behavior policy function $\pi_\beta(a|s)$ which is optimized through L2 loss.

$$L(\beta) = \mathbb{E}_{s_t, a_t \sim D, a \sim \pi_\beta(\cdot|s_t)} [(a - a_t)^2]$$

The policy objective is a combination of SAC's objective and MMD penalty.

$$J(\phi) = J_{SAC}(\phi) - \mathbb{E}_{s_t \sim D} \alpha (\text{MMD}(\pi_\beta(\cdot|s_t), \pi_\phi(\cdot|s_t)) - \epsilon)$$

where MMD is computed as follows.

$$\text{MMD}(x, y) = \frac{1}{N^2} \sum_{i, i'} k(x_i, x_{i'}) - \frac{2}{NM} \sum_{i, j} k(x_i, y_j) + \frac{1}{M^2} \sum_{j, j'} k(y_j, y_{j'})$$

where $k(x, y)$ is a gaussian kernel $k(x, y) = \exp(-(x - y)^2 / (2\sigma^2))$.

α is also adjustable through dual gradient descent where α becomes smaller if MMD is smaller than the threshold ϵ .

References

- Kumar et al., Stabilizing Off-Policy Q-Learning via Bootstrapping Error Reduction.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **action_scaler** (`d3rlpy.preprocessing.ActionScaler`) – Action preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **imitator_learning_rate** (*float*) – Learning rate for behavior policy function.

- **temp_learning_rate** (*float*) – Learning rate for temperature parameter.
- **alpha_learning_rate** (*float*) – Learning rate for α .
- **actor_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the actor.
- **critic_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the critic.
- **imitator_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the behavior policy.
- **temp_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the temperature.
- **alpha_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for α .
- **actor_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the actor.
- **critic_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the critic.
- **imitator_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the behavior policy.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **initial_temperature** (*float*) – Initial temperature value.
- **initial_alpha** (*float*) – Initial α value.
- **alpha_threshold** (*float*) – Threshold value described as ϵ .
- **lam** (*float*) – Weight for critic ensemble.
- **n_action_samples** (*int*) – Number of action samples to compute the best action.
- **n_target_samples** (*int*) – Number of action samples to compute BCQ-like target value.
- **n_mmd_action_samples** (*int*) – Number of action samples to compute MMD.
- **mmd_kernel** (*str*) – MMD kernel function. The available options are ['gaussian', 'laplacian'].
- **mmd_sigma** (*float*) – σ for gaussian kernel in MMD calculation.
- **vae_kl_weight** (*float*) – Constant weight to scale KL term for behavior policy training.
- **warmup_steps** (*int*) – Number of steps to warmup the policy function.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters `device` (`Union[int, str, bool]`) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.bear.BEAR`

class `d3rlpy.algos.BEAR`(`config`, `device`, `impl=None`)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.bear_impl.BEARImpl, d3rlpy.algos.qlearning.bear.BEARConfig]`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

CRR

class `d3rlpy.algos.CRRConfig`(`batch_size=100`, `gamma=0.99`, `observation_scaler=None`, `action_scaler=None`, `reward_scaler=None`, `actor_learning_rate=0.0003`, `critic_learning_rate=0.0003`, `actor_optim_factory=<factory>`, `critic_optim_factory=<factory>`, `actor_encoder_factory=<factory>`, `critic_encoder_factory=<factory>`, `q_func_factory=<factory>`, `beta=1.0`, `n_action_samples=4`, `advantage_type='mean'`, `weight_type='exp'`, `max_weight=20.0`, `n_critics=1`, `target_update_type='hard'`, `tau=0.005`, `target_update_interval=100`, `update_actor_interval=1`)

Bases: `d3rlpy.base.LearnableConfig`

Config of Critic Regularized Regression algorithm.

CRR is a simple offline RL method similar to AWAC.

The policy is trained as a supervised regression.

$$J(\phi) = \mathbb{E}_{s_t, a_t \sim D} [\log \pi_\phi(a_t | s_t) f(Q_\theta, \pi_\phi, s_t, a_t)]$$

where f is a filter function which has several options. The first option is `binary` function.

$$f := \mathbb{I}[A_\theta(s, a) > 0]$$

The other is `exp` function.

$$f := \exp(A(s, a) / \beta)$$

The $A(s, a)$ is an average function which also has several options. The first option is `mean`.

$$A(s, a) = Q_\theta(s, a) - \frac{1}{m} \sum_j^m Q(s, a_j)$$

The other one is `max`.

$$A(s, a) = Q_\theta(s, a) - \max_j^m Q(s, a_j)$$

where $a_j \sim \pi_\phi(s)$.

In evaluation, the action is determined by Critic Weighted Policy (CWP). In CWP, the several actions are sampled from the policy function, and the final action is re-sampled from the estimated action-value distribution.

References

- Wang et al., Critic Regularized Regression.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **beta** (*float*) – Temperature value defined as β above.
- **n_action_samples** (*int*) – Number of sampled actions to calculate $A(s, a)$ and for CWP.
- **advantage_type** (*str*) – Advantage function type. The available options are ['mean', 'max'].
- **weight_type** (*str*) – Filter function type. The available options are ['binary', 'exp'].
- **max_weight** (*float*) – Maximum weight for cross-entropy loss.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **target_update_type** (*str*) – Target update type. The available options are ['hard', 'soft'].
- **tau** (*float*) – Target network synchronization coefficient used with soft target update.
- **update_actor_interval** (*int*) – Interval to update policy function used with hard target update.
- **target_update_interval** (*int*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters `device` (`Union[int, str, bool]`) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.crr.CRR`

class `d3rlpy.algos.CRR`(`config`, `device`, `impl=None`)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.crr_impl.CRRImpl, d3rlpy.algos.qlearning.crr.CRRConfig]`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

CQL

class `d3rlpy.algos.CQLConfig`(`batch_size=256`, `gamma=0.99`, `observation_scaler=None`, `action_scaler=None`, `reward_scaler=None`, `actor_learning_rate=0.0001`, `critic_learning_rate=0.0003`, `temp_learning_rate=0.0001`, `alpha_learning_rate=0.0001`, `actor_optim_factory=<factory>`, `critic_optim_factory=<factory>`, `temp_optim_factory=<factory>`, `alpha_optim_factory=<factory>`, `actor_encoder_factory=<factory>`, `critic_encoder_factory=<factory>`, `q_func_factory=<factory>`, `tau=0.005`, `n_critics=2`, `initial_temperature=1.0`, `initial_alpha=1.0`, `alpha_threshold=10.0`, `conservative_weight=5.0`, `n_action_samples=10`, `soft_q_backup=False`)

Bases: `d3rlpy.base.LearnableConfig`

Config of Conservative Q-Learning algorithm.

CQL is a SAC-based data-driven deep reinforcement learning algorithm, which achieves state-of-the-art performance in offline RL problems.

CQL mitigates overestimation error by minimizing action-values under the current policy and maximizing values under data distribution for underestimation issue.

$$L(\theta_i) = \alpha \mathbb{E}_{s_t \sim D} \left[\log \sum_a \exp Q_{\theta_i}(s_t, a) - \mathbb{E}_{a \sim D} [Q_{\theta_i}(s_t, a)] - \tau \right] + L_{\text{SAC}}(\theta_i)$$

where α is an automatically adjustable value via Lagrangian dual gradient descent and τ is a threshold value. If the action-value difference is smaller than τ , the α will become smaller. Otherwise, the α will become larger to aggressively penalize action-values.

In continuous control, $\log \sum_a \exp Q(s, a)$ is computed as follows.

$$\log \sum_a \exp Q(s, a) \approx \log \left(\frac{1}{2N} \sum_{a_i \sim \text{Unif}(a)} \left[\frac{\exp Q(s, a_i)}{\text{Unif}(a)} \right] + \frac{1}{2N} \sum_{a_i \sim \pi_\phi(a|s)} \left[\frac{\exp Q(s, a_i)}{\pi_\phi(a_i|s)} \right] \right)$$

where N is the number of sampled actions.

The rest of optimization is exactly same as `d3rlpy.algos.SAC`.

References

- Kumar et al., Conservative Q-Learning for Offline Reinforcement Learning.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **temp_learning_rate** (*float*) – Learning rate for temperature parameter of SAC.
- **alpha_learning_rate** (*float*) – Learning rate for α .
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **temp_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the temperature.
- **alpha_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for α .
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **initial_temperature** (*float*) – Initial temperature value.
- **initial_alpha** (*float*) – Initial α value.
- **alpha_threshold** (*float*) – Threshold value described as τ .
- **conservative_weight** (*float*) – Constant weight to scale conservative loss.
- **n_action_samples** (*int*) – Number of sampled actions to compute $\log \sum_a \exp Q(s, a)$.
- **soft_q_backup** (*bool*) – Flag to use SAC-style backup.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters `device` (`Union[int, str, bool]`) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.cql.CQL`

class `d3rlpy.algos.CQL`(`config`, `device`, `impl=None`)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase`[`d3rlpy.algos.qlearning.torch.cql_impl.CQLImpl`, `d3rlpy.algos.qlearning.cql.CQLConfig`]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

DiscreteCQL

class `d3rlpy.algos.DiscreteCQLConfig`(`batch_size=32`, `gamma=0.99`, `observation_scaler=None`, `action_scaler=None`, `reward_scaler=None`, `learning_rate=6.25e-05`, `optim_factory=<factory>`, `encoder_factory=<factory>`, `q_func_factory=<factory>`, `n_critics=1`, `target_update_interval=8000`, `alpha=1.0`)

Bases: `d3rlpy.base.LearnableConfig`

Config of Discrete version of Conservative Q-Learning algorithm.

Discrete version of CQL is a DoubleDQN-based data-driven deep reinforcement learning algorithm (the original paper uses DQN), which achieves state-of-the-art performance in offline RL problems.

CQL mitigates overestimation error by minimizing action-values under the current policy and maximizing values under data distribution for underestimation issue.

$$L(\theta) = \alpha \mathbb{E}_{s_t \sim D} [\log \sum_a \exp Q_\theta(s_t, a) - \mathbb{E}_{a \sim D} [Q_\theta(s, a)]] + L_{DoubleDQN}(\theta)$$

References

- Kumar et al., Conservative Q-Learning for Offline Reinforcement Learning.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **learning_rate** (`float`) – Learning rate.
- **optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory.
- **encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory.
- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (`int`) – Mini-batch size.

- **gamma** (*float*) – Discount factor.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **target_update_interval** (*int*) – Interval to synchronize the target network.
- **alpha** (*float*) – math:*alpha* value above.
- **action_scaler** (*Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.cql.DiscreteCQL*

class `d3rlpy.algos.DiscreteCQL`(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.cql_impl.DiscreteCQLImpl, d3rlpy.algos.qlearning.cql.DiscreteCQLConfig]*

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

AWAC

class `d3rlpy.algos.AWACConfig`(*batch_size=1024, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, actor_learning_rate=0.0003, critic_learning_rate=0.0003, actor_optim_factory=<factory>, critic_optim_factory=<factory>, actor_encoder_factory=<factory>, critic_encoder_factory=<factory>, q_func_factory=<factory>, tau=0.005, lam=1.0, n_action_samples=1, n_critics=2*)

Bases: *d3rlpy.base.LearnableConfig*

Config of Advantage Weighted Actor-Critic algorithm.

AWAC is a TD3-based actor-critic algorithm that enables efficient fine-tuning where the policy is trained with offline datasets and is deployed to online training.

The policy is trained as a supervised regression.

$$J(\phi) = \mathbb{E}_{s_t, a_t \sim D} [\log \pi_{\phi}(a_t | s_t) \exp(\frac{1}{\lambda} A^{\pi}(s_t, a_t))]$$

where $A^{\pi}(s_t, a_t) = Q_{\theta}(s_t, a_t) - Q_{\theta}(s_t, a'_t)$ and $a'_t \sim \pi_{\phi}(\cdot | s_t)$

The key difference from AWR is that AWAC uses Q-function trained via TD learning for the better sample-efficiency.

References

- Nair et al., Accelerating Online Reinforcement Learning with Offline Datasets.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **lam** (*float*) – λ for weight calculation.
- **n_action_samples** (*int*) – Number of sampled actions to calculate $A^\pi(s_t, a_t)$.
- **n_critics** (*int*) – Number of Q functions for ensemble.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters *device* (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.awac.AWAC*

class *d3rlpy.algos.AWAC*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase*[*d3rlpy.algos.qlearning.torch.awac_impl.AWACImpl, d3rlpy.algos.qlearning.awac.AWACConfig*]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

PLAS

```
class d3rlpy.algos.PLASConfig(batch_size=100, gamma=0.99, observation_scaler=None,  
                             action_scaler=None, reward_scaler=None, actor_learning_rate=0.0001,  
                             critic_learning_rate=0.001, imitator_learning_rate=0.0001,  
                             actor_optim_factory=<factory>, critic_optim_factory=<factory>,  
                             imitator_optim_factory=<factory>, actor_encoder_factory=<factory>,  
                             critic_encoder_factory=<factory>, imitator_encoder_factory=<factory>,  
                             q_func_factory=<factory>, tau=0.005, n_critics=2, lam=0.75,  
                             warmup_steps=500000, beta=0.5)
```

Bases: `d3rlpy.base.LearnableConfig`

Config of Policy in Latent Action Space algorithm.

PLAS is an offline deep reinforcement learning algorithm whose policy function is trained in latent space of Conditional VAE. Unlike other algorithms, PLAS can achieve good performance by using its less constrained policy function.

$$a \sim p_{\beta}(a|s, z = \pi_{\phi}(s))$$

where β is a parameter of the decoder in Conditional VAE.

References

- Zhou et al., PLAS: latent action space for offline reinforcement learning.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **action_scaler** (`d3rlpy.preprocessing.ActionScaler`) – Action preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **imitator_learning_rate** (*float*) – Learning rate for Conditional VAE.
- **actor_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the actor.
- **critic_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the critic.
- **imitator_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the conditional VAE.
- **actor_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the actor.
- **critic_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the critic.
- **imitator_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the conditional VAE.

- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **lam** (*float*) – Weight factor for critic ensemble.
- **warmup_steps** (*int*) – Number of steps to warmup the VAE.
- **beta** (*float*) – KL regularization term for Conditional VAE.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.plas.PLAS*

class *d3rlpy.algos.PLAS*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.plas_impl.PLASImpl, d3rlpy.algos.qlearning.plas.PLASConfig]*

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

PLAS+P

class *d3rlpy.algos.PLASWithPerturbationConfig*(*batch_size=100, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, actor_learning_rate=0.0001, critic_learning_rate=0.001, imitator_learning_rate=0.0001, actor_optim_factory=<factory>, critic_optim_factory=<factory>, imitator_optim_factory=<factory>, actor_encoder_factory=<factory>, critic_encoder_factory=<factory>, imitator_encoder_factory=<factory>, q_func_factory=<factory>, tau=0.005, n_critics=2, lam=0.75, warmup_steps=500000, beta=0.5, action_flexibility=0.05*)

Bases: *d3rlpy.algos.qlearning.plas.PLASConfig*

Config of Policy in Latent Action Space algorithm with perturbation layer.

PLAS with perturbation layer enables PLAS to output out-of-distribution action.

References

- Zhou et al., PLAS: latent action space for offline reinforcement learning.

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **imitator_learning_rate** (*float*) – Learning rate for Conditional VAE.
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **imitator_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the conditional VAE.
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **imitator_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the conditional VAE.
- **q_func_factory** (*d3rlpy.models.q_functions.QFunctionFactory*) – Q function factory.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **update_actor_interval** (*int*) – Interval to update policy function.
- **lam** (*float*) – Weight factor for critic ensemble.
- **action_flexibility** (*float*) – Output scale of perturbation layer.
- **warmup_steps** (*int*) – Number of steps to warmup the VAE.
- **beta** (*float*) – KL regularization term for Conditional VAE.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.plas.PLASWithPerturbation`

```
class d3rlpy.algos.PLASWithPerturbation(config, device, impl=None)
    Bases: d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.
    plas_impl.PLASImpl, d3rlpy.algos.qlearning.plas.PLASConfig]
```

TD3+BC

```
class d3rlpy.algos.TD3PlusBCConfig(batch_size=256, gamma=0.99, observation_scaler=None,
    action_scaler=None, reward_scaler=None,
    actor_learning_rate=0.0003, critic_learning_rate=0.0003,
    actor_optim_factory=<factory>, critic_optim_factory=<factory>,
    actor_encoder_factory=<factory>,
    critic_encoder_factory=<factory>, q_func_factory=<factory>,
    tau=0.005, n_critics=2, target_smoothing_sigma=0.2,
    target_smoothing_clip=0.5, alpha=2.5, update_actor_interval=2)
```

Bases: `d3rlpy.base.LearnableConfig`

Config of TD3+BC algorithm.

TD3+BC is an simple offline RL algorithm built on top of TD3. TD3+BC introduces BC-reguralized policy objective function.

$$J(\phi) = \mathbb{E}_{s,a \sim D} [\lambda Q(s, \pi(s)) - (a - \pi(s))^2]$$

where

$$\lambda = \frac{\alpha}{\frac{1}{N} \sum_i (s_i, a_i) |Q(s_i, a_i)|}$$

References

- Fujimoto et al., A Minimalist Approach to Offline Reinforcement Learning.

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **action_scaler** (`d3rlpy.preprocessing.ActionScaler`) – Action preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **actor_learning_rate** (`float`) – Learning rate for a policy function.
- **critic_learning_rate** (`float`) – Learning rate for Q functions.
- **actor_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the actor.
- **critic_optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory for the critic.
- **actor_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the actor.
- **critic_encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory for the critic.

- **q_func_factory** (`d3rlpy.models.q_functions.QFunctionFactory`) – Q function factory.
- **batch_size** (`int`) – Mini-batch size.
- **gamma** (`float`) – Discount factor.
- **tau** (`float`) – Target network synchronization coefficient.
- **n_critics** (`int`) – Number of Q functions for ensemble.
- **target_smoothing_sigma** (`float`) – Standard deviation for target noise.
- **target_smoothing_clip** (`float`) – Clipping range for target noise.
- **alpha** (`float`) – α value.
- **update_actor_interval** (`int`) – Interval to update policy function described as *delayed policy update* in the paper.

Return type `None`

create(`device=False`)

Returns algorithm object.

Parameters `device` (`Union[int, str, bool]`) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.td3_plus_bc.TD3PlusBC`

class `d3rlpy.algos.TD3PlusBC`(`config, device, impl=None`)

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.torch.td3_plus_bc_impl.TD3PlusBCImpl, d3rlpy.algos.qlearning.td3_plus_bc.TD3PlusBCConfig]`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

IQL

class `d3rlpy.algos.IQLConfig`(`batch_size=256, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, actor_learning_rate=0.0003, critic_learning_rate=0.0003, actor_optim_factory=<factory>, critic_optim_factory=<factory>, actor_encoder_factory=<factory>, critic_encoder_factory=<factory>, value_encoder_factory=<factory>, tau=0.005, n_critics=2, expectile=0.7, weight_temp=3.0, max_weight=100.0`)

Bases: `d3rlpy.base.LearnableConfig`

Implicit Q-Learning algorithm.

IQL is the offline RL algorithm that avoids ever querying values of unseen actions while still being able to perform multi-step dynamic programming updates.

There are three functions to train in IQL. First the state-value function is trained via expectile regression.

$$L_V(\psi) = \mathbb{E}_{(s,a) \sim D} [L_2^\tau(Q_\theta(s, a) - V_\psi(s))]$$

where $L_2^\tau(u) = |\tau - \mathbb{I}(u < 0)|u^2$.

The Q-function is trained with the state-value function to avoid query the actions.

$$L_Q(\theta) = \mathbb{E}_{(s,a,r,s') \sim D}[(r + \gamma V_\psi(s') - Q_\theta(s,a))^2]$$

Finally, the policy function is trained by using advantage weighted regression.

$$L_\pi(\phi) = \mathbb{E}_{(s,a) \sim D}[\exp(\beta(Q_\theta - V_\psi(s))) \log \pi_\phi(a|s)]$$

References

- Kostrikov et al., [Offline Reinforcement Learning with Implicit Q-Learning](#).

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **actor_learning_rate** (*float*) – Learning rate for policy function.
- **critic_learning_rate** (*float*) – Learning rate for Q functions.
- **actor_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the actor.
- **critic_optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory for the critic.
- **actor_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the actor.
- **critic_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the critic.
- **value_encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory for the value function.
- **batch_size** (*int*) – Mini-batch size.
- **gamma** (*float*) – Discount factor.
- **tau** (*float*) – Target network synchronization coefficient.
- **n_critics** (*int*) – Number of Q functions for ensemble.
- **expectile** (*float*) – Expectile value for value function training.
- **weight_temp** (*float*) – Inverse temperature value represented as β .
- **max_weight** (*float*) – Maximum advantage weight value to clip.

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters *device* (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.iql.IQL*

class *d3rlpy.algos.IQL*(*config, device, impl=None*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase*[*d3rlpy.algos.qlearning.torch.iql_impl.IQLImpl, d3rlpy.algos.qlearning.iql.IQLConfig*]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

RandomPolicy

class *d3rlpy.algos.RandomPolicyConfig*(*batch_size=256, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, distribution='uniform', normal_std=1.0*)

Bases: *d3rlpy.base.LearnableConfig*

Random Policy for continuous control algorithm.

This is designed for data collection and lightweight interaction tests. `fit` and `fit_online` methods will raise exceptions.

Parameters

- **action_scaler** (*d3rlpy.preprocessing.ActionScaler*) – Action preprocessor.
- **distribution** (*str*) – Random distribution. Available options are ['uniform', 'normal'].
- **normal_std** (*float*) – Standard deviation of the normal distribution. This is only used when `distribution='normal'`.
- **batch_size** (*int*) –
- **gamma** (*float*) –
- **observation_scaler** (*Optional[d3rlpy.preprocessing.observation_scalers.ObservationScaler]*) –
- **reward_scaler** (*Optional[d3rlpy.preprocessing.reward_scalers.RewardScaler]*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters `device` (*Union[int, str, bool]*) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.qlearning.random_policy.RandomPolicy*

class *d3rlpy.algos.RandomPolicy*(*config*)

Bases: *d3rlpy.algos.qlearning.base.QLearningAlgoBase*[*None, d3rlpy.algos.qlearning.random_policy.RandomPolicyConfig*]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type d3rlpy.constants.ActionSpace

predict(x)

Returns greedy actions.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

actions = algo.predict(x)
# actions.shape == (100, action size) for continuous control
# actions.shape == (100,) for discrete control
```

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]]`) – Observations

Returns Greedy actions

Return type `numpy.ndarray`[Any, `numpy.dtype`[Any]]

predict_value(x, action)

Returns predicted action-values.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

# for continuous control
# 100 actions with shape of (2,)
actions = np.random.random((100, 2))

# for discrete control
# 100 actions in integer values
actions = np.random.randint(2, size=100)

values = algo.predict_value(x, actions)
# values.shape == (100,)
```

Parameters

- **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]]`) – Observations
- **action** (`numpy.ndarray`[Any, `numpy.dtype`[Any]]) – Actions

Returns Predicted action-values

Return type `numpy.ndarray`[Any, `numpy.dtype`[Any]]

sample_action(x)

Returns sampled actions.

The sampled actions are identical to the output of *predict* method if the policy is deterministic.

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]]`) – Observations.

Returns Sampled actions.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

DiscreteRandomPolicy

```
class d3rlpy.algos.DiscreteRandomPolicyConfig(batch_size=256, gamma=0.99,  
                                              observation_scaler=None, action_scaler=None,  
                                              reward_scaler=None)
```

Bases: `d3rlpy.base.LearnableConfig`

Random Policy for discrete control algorithm.

This is designed for data collection and lightweight interaction tests. `fit` and `fit_online` methods will raise exceptions.

Parameters

- **batch_size** (*int*) –
- **gamma** (*float*) –
- **observation_scaler** (*Optional[d3rlpy.preprocessing.observation_scalers.ObservationScaler]*) –
- **action_scaler** (*Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]*) –
- **reward_scaler** (*Optional[d3rlpy.preprocessing.reward_scalers.RewardScaler]*) –

Return type `None`

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and `True`, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `d3rlpy.algos.qlearning.random_policy.DiscreteRandomPolicy`

```
class d3rlpy.algos.DiscreteRandomPolicy(config)
```

Bases: `d3rlpy.algos.qlearning.base.QLearningAlgoBase[None, d3rlpy.algos.qlearning.random_policy.DiscreteRandomPolicyConfig]`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

predict(*x*)

Returns greedy actions.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

actions = algo.predict(x)
```

(continues on next page)

(continued from previous page)

```
# actions.shape == (100, action size) for continuous control
# actions.shape == (100,) for discrete control
```

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations

Returns Greedy actions

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

predict_value(*x, action*)

Returns predicted action-values.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

# for continuous control
# 100 actions with shape of (2,)
actions = np.random.random((100, 2))

# for discrete control
# 100 actions in integer values
actions = np.random.randint(2, size=100)

values = algo.predict_value(x, actions)
# values.shape == (100,)
```

Parameters

- **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations
- **action** (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Actions

Returns Predicted action-values

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

sample_action(*x*)

Returns sampled actions.

The sampled actions are identical to the output of *predict* method if the policy is deterministic.

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations.

Returns Sampled actions.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

4.1.3 Decision Transformer

Decision Transformer-based algorithms usually require tricky interaction codes for evaluation. In d3rlpy, those algorithms provide `as_stateful_wrapper` method to easily integrate the algorithm into your system.

```
import d3rlpy

dataset, env = d3rlpy.datasets.get_pendulum()

dt = d3rlpy.algos.DecisionTransformerConfig().create(device="cuda:0")

# offline training
dt.fit(
    dataset,
    n_steps=1000000,
    n_steps_per_epoch=1000,
    eval_env=env,
    eval_target_return=0, # specify target environment return
)

# wrap as stateful actor for interaction
actor = dt.as_stateful_wrapper(target_return=0)

# interaction
observation, reward = env.reset(), 0.0
while True:
    action = actor.predict(observation, reward)
    observation, reward, done, truncated, _ = env.step(action)
    if done or truncated:
        break

# reset history
actor.reset()
```

TransformerAlgoBase

```
class d3rlpy.algos.TransformerAlgoBase(config, device, impl=None)
    Bases: Generic[d3rlpy.algos.transformer.base.TTransformerImpl, d3rlpy.algos.
transformer.base.TTransformerConfig], d3rlpy.base.LearnableBase[d3rlpy.algos.
transformer.base.TTransformerImpl, d3rlpy.algos.transformer.base.TTransformerConfig]
```

as_stateful_wrapper(*target_return*, *action_sampler=None*)

Returns a wrapped Transformer algorithm for stateful decision making.

Parameters

- **target_return** (*float*) – Target environment return.
- **action_sampler** (*Optional*[`d3rlpy.algos.transformer.action_samplers.TransformerActionSampler`]) – Action sampler.

Returns StatefulTransformerWrapper object.

Return type `d3rlpy.algos.transformer.base.StatefulTransformerWrapper[d3rlpy.algos.transformer.base.TTransformerImpl, d3rlpy.algos.transformer.base.TTransformerConfig]`

fit(*dataset*, *n_steps*, *n_steps_per_epoch*=10000, *experiment_name*=None, *with_timestamp*=True, *logger_adapter*=<d3rlpy.logging.file_adapter.FileAdapterFactory object>, *show_progress*=True, *eval_env*=None, *eval_target_return*=None, *eval_action_sampler*=None, *save_interval*=1, *callback*=None, *enable_ddp*=False)

Trains with given dataset.

Parameters

- **dataset** (d3rlpy.dataset.replay_buffer.ReplayBuffer) – Offline dataset to train.
- **n_steps** (int) – Number of steps to train.
- **n_steps_per_epoch** (int) – Number of steps per epoch. This value will be ignored when n_steps is None.
- **experiment_name** (Optional[str]) – Experiment name for logging. If not passed, the directory name will be {class name}_{timestamp}.
- **with_timestamp** (bool) – Flag to add timestamp string to the last of directory name.
- **logger_adapter** (d3rlpy.logging.logger.LoggerAdapterFactory) – Logger-AdapterFactory object.
- **show_progress** (bool) – Flag to show progress bar for iterations.
- **eval_env** (Optional[Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]]) – Evaluation environment.
- **eval_target_return** (Optional[float]) – Evaluation return target.
- **eval_action_sampler** (Optional[d3rlpy.algos.transformer.action_samplers.TransformerActionSampler]) – Action sampler used in evaluation.
- **save_interval** (int) – Interval to save parameters.
- **callback** (Optional[Callable[[typing_extensions.Self, int, int], None]]) – Callable function that takes (algo, epoch, total_step), which is called every step.
- **enable_ddp** (bool) – Flag to wrap models with DataDistributedParallel.

Return type None

predict(*inpt*)

Returns action.

This is for internal use. For evaluation, use StatefulTransformerWrapper instead.

Parameters *inpt* (d3rlpy.algos.transformer.inputs.TransformerInput) – Sequence input.

Returns Action.

Return type numpy.ndarray[Any, numpy.dtype[Any]]

update(*batch*)

Update parameters with mini-batch of data.

Parameters *batch* (d3rlpy.dataset.mini_batch.TrajectoryMiniBatch) – Mini-batch data.

Returns Dictionary of metrics.

Return type Dict[str, float]

DecisionTransformer

```
class d3rlpy.algos.DecisionTransformerConfig(batch_size=64, gamma=0.99, observation_scaler=None,
                                             action_scaler=None, reward_scaler=None,
                                             context_size=20, max_timestep=1000,
                                             learning_rate=0.0001, encoder_factory=<factory>,
                                             optim_factory=<factory>, num_heads=1, num_layers=3,
                                             attn_dropout=0.1, resid_dropout=0.1,
                                             embed_dropout=0.1, activation_type='relu', position_encoding_type=<PositionEncodingType.SIMPLE: 'simple'>,
                                             warmup_steps=10000, clip_grad_norm=0.25, compile=False)
```

Bases: `d3rlpy.algos.transformer.base.TransformerConfig`

Config of Decision Transformer.

Decision Transformer solves decision-making problems as a sequence modeling problem.

References

- [Chen et al., Decision Transformer: Reinforcement Learning via Sequence Modeling.](#)

Parameters

- **observation_scaler** (`d3rlpy.preprocessing.ObservationScaler`) – Observation preprocessor.
- **action_scaler** (`d3rlpy.preprocessing.ActionScaler`) – Action preprocessor.
- **reward_scaler** (`d3rlpy.preprocessing.RewardScaler`) – Reward preprocessor.
- **context_size** (`int`) – Prior sequence length.
- **max_timestep** (`int`) – Maximum environmental timestep.
- **batch_size** (`int`) – Mini-batch size.
- **learning_rate** (`float`) – Learning rate.
- **encoder_factory** (`d3rlpy.models.encoders.EncoderFactory`) – Encoder factory.
- **optim_factory** (`d3rlpy.models.optimizers.OptimizerFactory`) – Optimizer factory.
- **num_heads** (`int`) – Number of attention heads.
- **num_layers** (`int`) – Number of attention blocks.
- **attn_dropout** (`float`) – Dropout probability for attentions.
- **resid_dropout** (`float`) – Dropout probability for residual connection.
- **embed_dropout** (`float`) – Dropout probability for embeddings.
- **activation_type** (`str`) – Type of activation function.
- **position_encoding_type** (`d3rlpy.PositionEncodingType`) – Type of positional encoding (SIMPLE or GLOBAL).
- **warmup_steps** (`int`) – Warmup steps for learning rate scheduler.
- **clip_grad_norm** (`float`) – Norm of gradient clipping.
- **compile** (`bool`) – (experimental) Flag to enable JIT compilation.

- **gamma** (*float*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.transformer.decision_transformer.DecisionTransformer*

class `d3rlpy.algos.DecisionTransformer`(*config, device, impl=None*)

Bases: *d3rlpy.algos.transformer.base.TransformerAlgoBase*[*d3rlpy.algos.transformer.torch.decision_transformer_impl.DecisionTransformerImpl*, *d3rlpy.algos.transformer.decision_transformer.DecisionTransformerConfig*]

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type *d3rlpy.constants.ActionSpace*

DiscreteDecisionTransformer

class `d3rlpy.algos.DiscreteDecisionTransformerConfig`(*batch_size=128, gamma=0.99, observation_scaler=None, action_scaler=None, reward_scaler=None, context_size=20, max_timestep=1000, learning_rate=0.0006, encoder_factory=<factory>, optim_factory=<factory>, num_heads=8, num_layers=6, attn_dropout=0.1, resid_dropout=0.1, embed_dropout=0.1, activation_type='gelu', embed_activation_type='tanh', position_encoding_type=<PositionEncodingType.GLOBAL: 'global'>, warmup_tokens=10240, final_tokens=30000000, clip_grad_norm=1.0, compile=False*)

Bases: *d3rlpy.algos.transformer.base.TransformerConfig*

Config of Decision Transformer for discrete action-space.

Decision Transformer solves decision-making problems as a sequence modeling problem.

References

- [Chen et al., Decision Transformer: Reinforcement Learning via Sequence Modeling.](#)

Parameters

- **observation_scaler** (*d3rlpy.preprocessing.ObservationScaler*) – Observation preprocessor.
- **reward_scaler** (*d3rlpy.preprocessing.RewardScaler*) – Reward preprocessor.
- **context_size** (*int*) – Prior sequence length.
- **max_timestep** (*int*) – Maximum environmental timestep.
- **batch_size** (*int*) – Mini-batch size.
- **learning_rate** (*float*) – Learning rate.
- **encoder_factory** (*d3rlpy.models.encoders.EncoderFactory*) – Encoder factory.
- **optim_factory** (*d3rlpy.models.optimizers.OptimizerFactory*) – Optimizer factory.
- **num_heads** (*int*) – Number of attention heads.
- **num_layers** (*int*) – Number of attention blocks.
- **attn_dropout** (*float*) – Dropout probability for attentions.
- **resid_dropout** (*float*) – Dropout probability for residual connection.
- **embed_dropout** (*float*) – Dropout probability for embeddings.
- **activation_type** (*str*) – Type of activation function.
- **embed_activation_type** (*str*) – Type of activation function applied to embeddings.
- **position_encoding_type** (*d3rlpy.PositionEncodingType*) – Type of positional encoding (SIMPLE or GLOBAL).
- **warmup_tokens** (*int*) – Number of tokens to warmup learning rate scheduler.
- **final_tokens** (*int*) – Final number of tokens for learning rate scheduler.
- **clip_grad_norm** (*float*) – Norm of gradient clipping.
- **compile** (*bool*) – (experimental) Flag to enable JIT compilation.
- **gamma** (*float*) –
- **action_scaler** (*Optional[d3rlpy.preprocessing.action_scalers.ActionScaler]*) –

Return type *None*

create(*device=False*)

Returns algorithm object.

Parameters **device** (*Union[int, str, bool]*) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type *d3rlpy.algos.transformer.decision_transformer.DiscreteDecisionTransformer*

```
class d3rlpy.algos.DiscreteDecisionTransformer(config, device, impl=None)
    Bases: d3rlpy.algos.transformer.base.TransformerAlgoBase[d3rlpy.algos.transformer.
    torch.decision_transformer_impl.DiscreteDecisionTransformerImpl, d3rlpy.algos.
    transformer.decision\_transformer.DiscreteDecisionTransformerConfig]

    get_action_type()
        Returns action type (continuous or discrete).

        Returns action type.

        Return type d3rlpy.constants.ActionSpace
```

TransformerActionSampler

`TransformerActionSampler` is an interface to sample actions from `DecisionTransformer` outputs. Basically, the default action-sampler will be used if you don't explicitly specify one.

```
import d3rlpy

dataset, env = d3rlpy.datasets.get_pendulum()

dt = d3rlpy.algos.DecisionTransformerConfig().create(device="cuda:0")

# offline training
dt.fit(
    dataset,
    n_steps=100000,
    n_steps_per_epoch=1000,
    eval_env=env,
    eval_target_return=0,
    # manually specify action-sampler
    eval_action_sampler=d3rlpy.algos.IdentityTransformerActionSampler(),
)

# wrap as stateful actor for interaction with manually specified action-sampler
actor = dt.as_stateful_wrapper(
    target_return=0,
    action_sampler=d3rlpy.algos.IdentityTransformerActionSampler(),
)
```

d3rlpy.algos.TransformerActionSampler	Interface of <code>TransformerActionSampler</code> .
d3rlpy.algos.SoftmaxTransformerActionSampler	Softmax action-sampler.
d3rlpy.algos.GreedyTransformerActionSampler	Greedy action-sampler.

d3rlpy.algos.TransformerActionSampler

class d3rlpy.algos.**TransformerActionSampler**(*args, **kwargs)
Interface of TransformerActionSampler.

Methods

__call__(transformer_output)
Returns sampled action from Transformer output.

Parameters **transformer_output** (*numpy.ndarray*[Any, *numpy.dtype*[Any]]) – Output of Transformer algorithms.

Returns Sampled action.

Return type Union[*numpy.ndarray*[Any, *numpy.dtype*[Any]], int]

d3rlpy.algos.SoftmaxTransformerActionSampler

class d3rlpy.algos.**SoftmaxTransformerActionSampler**(temperature=1.0)
Softmax action-sampler.

This class implements softmax function to sample action from discrete probability distribution.

Parameters **temperature** (*int*) – Softmax temperature.

Methods

__call__(transformer_output)
Returns sampled action from Transformer output.

Parameters **transformer_output** (*numpy.ndarray*[Any, *numpy.dtype*[Any]]) – Output of Transformer algorithms.

Returns Sampled action.

Return type Union[*numpy.ndarray*[Any, *numpy.dtype*[Any]], int]

d3rlpy.algos.GreedyTransformerActionSampler

class d3rlpy.algos.**GreedyTransformerActionSampler**(*args, **kwargs)
Greedy action-sampler.

This class implements greedy function to determine action from discrete probability distribution.

Methods

__call__(*transformer_output*)

Returns sampled action from Transformer output.

Parameters **transformer_output** (*numpy.ndarray*[Any, *numpy.dtype*[Any]]) – Output of Transformer algorithms.

Returns Sampled action.

Return type Union[*numpy.ndarray*[Any, *numpy.dtype*[Any]], int]

4.2 Q Functions

d3rlpy provides various Q functions including state-of-the-arts, which are internally used in algorithm objects. You can switch Q functions by passing `q_func_factory` argument at algorithm initialization.

```
import d3rlpy

cql = d3rlpy.algos.CQLConfig(q_func_factory=d3rlpy.models.QRQFunctionFactory())
```

Also you can change hyper parameters.

```
q_func = d3rlpy.models.QRQFunctionFactory(n_quantiles=32)

cql = d3rlpy.algos.CQLConfig(q_func_factory=q_func).create()
```

The default Q function is mean approximator, which estimates expected scalar action-values. However, in recent advancements of deep reinforcement learning, the new type of action-value approximators has been proposed, which is called *distributional* Q functions.

Unlike the mean approximator, the *distributional* Q functions estimate distribution of action-values. This *distributional* approaches have shown consistently much stronger performance than the mean approximator.

Here is a list of available Q functions in the order of performance ascendingly. Currently, as a trade-off between performance and computational complexity, the higher performance requires the more expensive computational costs.

<code>d3rlpy.models.MeanQFunctionFactory</code>	Standard Q function factory class.
<code>d3rlpy.models.QRQFunctionFactory</code>	Quantile Regression Q function factory class.
<code>d3rlpy.models.IQNQFunctionFactory</code>	Implicit Quantile Network Q function factory class.

4.2.1 d3rlpy.models.MeanQFunctionFactory

class `d3rlpy.models.MeanQFunctionFactory`(*share_encoder=False*)

Standard Q function factory class.

This is the standard Q function factory class.

References

- Mnih et al., Human-level control through deep reinforcement learning.
- Lillicrap et al., Continuous control with deep reinforcement learning.

Parameters `share_encoder` (*bool*) – flag to share encoder over multiple Q functions.

Return type *None*

Methods

create_continuous(*encoder, hidden_size*)

Returns PyTorch's Q function module.

Parameters

- **encoder** (*d3rlpy.models.torch.encoders.EncoderWithAction*) – Encoder module that processes the observation and action to obtain feature representations.
- **hidden_size** (*int*) – Dimension of encoder output.

Returns Tuple of continuous Q function and its forwarder.

Return type Tuple[d3rlpy.models.torch.q_functions.mean_q_function.ContinuousMeanQFunction, d3rlpy.models.torch.q_functions.mean_q_function.ContinuousMeanQFunctionForwarder]

create_discrete(*encoder, hidden_size, action_size*)

Returns PyTorch's Q function module.

Parameters

- **encoder** (*d3rlpy.models.torch.encoders.Encoder*) – Encoder that processes the observation to obtain feature representations.
- **hidden_size** (*int*) – Dimension of encoder output.
- **action_size** (*int*) – Dimension of discrete action-space.

Returns Tuple of discrete Q function and its forwarder.

Return type Tuple[d3rlpy.models.torch.q_functions.mean_q_function.DiscreteMeanQFunction, d3rlpy.models.torch.q_functions.mean_q_function.DiscreteMeanQFunctionForwarder]

classmethod deserialize(*serialized_config*)

Parameters `serialized_config` (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters `dict_config` (*Dict[str, Any]*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_file(*path*)

Parameters `path` (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs` (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Returns Q function type.

Returns Q function type.

Return type `str`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict (`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json (`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- **skipkeys** (`bool`) –
- **ensure_ascii** (`bool`) –
- **check_circular** (`bool`) –
- **allow_nan** (`bool`) –
- **indent** (`Optional[Union[int, str]]`) –
- **separators** (`Optional[Tuple[str, str]]`) –

- **default** (*Optional*[*Callable*]) –
- **sort_keys** (*bool*) –

Return type *str*

Attributes

share_encoder: *bool* = *False*

4.2.2 d3rlpy.models.QRQFunctionFactory

class d3rlpy.models.QRQFunctionFactory(*share_encoder=False, n_quantiles=32*)
Quantile Regression Q function factory class.

References

- Dabney et al., Distributional reinforcement learning with quantile regression.

Parameters

- **share_encoder** (*bool*) – flag to share encoder over multiple Q functions.
- **n_quantiles** (*int*) – the number of quantiles.

Return type *None*

Methods

create_continuous(*encoder, hidden_size*)
Returns PyTorch's Q function module.

Parameters

- **encoder** (*d3rlpy.models.torch.encoders.EncoderWithAction*) – Encoder module that processes the observation and action to obtain feature representations.
- **hidden_size** (*int*) – Dimension of encoder output.

Returns Tuple of continuous Q function and its forwarder.

Return type Tuple[d3rlpy.models.torch.q_functions.qr_q_function.ContinuousQRQFunction, d3rlpy.models.torch.q_functions.qr_q_function.ContinuousQRQFunctionForwarder]

create_discrete(*encoder, hidden_size, action_size*)
Returns PyTorch's Q function module.

Parameters

- **encoder** (*d3rlpy.models.torch.encoders.Encoder*) – Encoder that processes the observation to obtain feature representations.
- **hidden_size** (*int*) – Dimension of encoder output.
- **action_size** (*int*) – Dimension of discrete action-space.

Returns Tuple of discrete Q function and its forwarder.

Return type Tuple[d3rlpy.models.torch.q_functions.qr_q_function.DiscreteQRQFunction,
d3rlpy.models.torch.q_functions.qr_q_function.DiscreteQRQFunctionForwarder]

classmethod `deserialize(serialized_config)`

Parameters `serialized_config (str)` –

Return type d3rlpy.serializable_config.TConfig

classmethod `deserialize_from_dict(dict_config)`

Parameters `dict_config (Dict[str, Any])` –

Return type d3rlpy.serializable_config.TConfig

classmethod `deserialize_from_file(path)`

Parameters `path (str)` –

Return type d3rlpy.serializable_config.TConfig

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs (Optional[Union[dict, list, str, int, float, bool]])` –

Return type dataclasses_json.api.A

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None,
infer_missing=False, **kw)`

Parameters `s (Union[str, bytes, bytearray])` –

Return type dataclasses_json.api.A

static `get_type()`

Returns Q function type.

Returns Q function type.

Return type str

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None,
load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing (bool)** –
- **many (bool)** –
- **partial (bool)** –

Return type dataclasses_json.mm.SchemaF[dataclasses_json.api.A]

serialize()

Return type str

serialize_to_dict()

Return type Dict[str, Any]

to_dict(*encode_json=False*)

Return type Dict[str, Optional[Union[dict, list, str, int, float, bool]]]

to_json(**, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw*)

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional[Union[int, str]]*) –
- **separators** (*Optional[Tuple[str, str]]*) –
- **default** (*Optional[Callable]*) –
- **sort_keys** (*bool*) –

Return type str

Attributes

n_quantiles: int = 32

share_encoder: bool = False

4.2.3 d3rlpy.models.IQNQFunctionFactory

class d3rlpy.models.IQNQFunctionFactory(*share_encoder=False, n_quantiles=64, n_greedy_quantiles=32, embed_size=64*)

Implicit Quantile Network Q function factory class.

References

- Dabney et al., [Implicit quantile networks for distributional reinforcement learning](#).

Parameters

- **share_encoder** (*bool*) – flag to share encoder over multiple Q functions.
- **n_quantiles** (*int*) – the number of quantiles.
- **n_greedy_quantiles** (*int*) – the number of quantiles for inference.
- **embed_size** (*int*) – the embedding size.

Return type None

Methods

create_continuous(*encoder*, *hidden_size*)

Returns PyTorch's Q function module.

Parameters

- **encoder** (*d3rlpy.models.torch.encoders.EncoderWithAction*) – Encoder module that processes the observation and action to obtain feature representations.
- **hidden_size** (*int*) – Dimension of encoder output.

Returns Tuple of continuous Q function and its forwarder.

Return type Tuple[d3rlpy.models.torch.q_functions.iqn_q_function.ContinuousIQNQFunction, d3rlpy.models.torch.q_functions.iqn_q_function.ContinuousIQNQFunctionForwarder]

create_discrete(*encoder*, *hidden_size*, *action_size*)

Returns PyTorch's Q function module.

Parameters

- **encoder** (*d3rlpy.models.torch.encoders.Encoder*) – Encoder that processes the observation to obtain feature representations.
- **hidden_size** (*int*) – Dimension of encoder output.
- **action_size** (*int*) – Dimension of discrete action-space.

Returns Tuple of discrete Q function and its forwarder.

Return type Tuple[d3rlpy.models.torch.q_functions.iqn_q_function.DiscreteIQNQFunction, d3rlpy.models.torch.q_functions.iqn_q_function.DiscreteIQNQFunctionForwarder]

classmethod deserialize(*serialized_config*)

Parameters *serialized_config* (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters *dict_config* (*Dict[str, Any]*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_file(*path*)

Parameters *path* (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod from_dict(*kvs*, *, *infer_missing=False*)

Parameters *kvs* (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type dataclasses_json.api.A

classmethod from_json(*s*, *, *parse_float=None*, *parse_int=None*, *parse_constant=None*, *infer_missing=False*, ***kw*)

Parameters *s* (*Union[str, bytes, bytearray]*) –

Return type `dataclasses_json.api.A`

static `get_type()`

Returns Q function type.

Returns Q function type.

Return type `str`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- `infer_missing` (`bool`) –
- `many` (`bool`) –
- `partial` (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict (`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json (`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- `skipkeys` (`bool`) –
- `ensure_ascii` (`bool`) –
- `check_circular` (`bool`) –
- `allow_nan` (`bool`) –
- `indent` (`Optional[Union[int, str]]`) –
- `separators` (`Optional[Tuple[str, str]]`) –
- `default` (`Optional[Callable]`) –
- `sort_keys` (`bool`) –

Return type `str`

Attributes

```
embed_size: int = 64
n_greedy_quantiles: int = 32
n_quantiles: int = 64
share_encoder: bool = False
```

4.3 Replay Buffer

You can also check advanced use cases at [examples](#) directory.

4.3.1 MDPDataset

d3rlpy provides useful dataset structure for data-driven deep reinforcement learning. In supervised learning, the training script iterates input data X and label data Y . However, in reinforcement learning, mini-batches consist with sets of (s_t, a_t, r_t, s_{t+1}) and episode terminal flags. Converting a set of observations, actions, rewards and terminal flags into this tuples is boring and requires some codings.

Therefore, d3rlpy provides MDPDataset class which enables you to handle reinforcement learning datasets without any efforts.

```
import d3rlpy

# 1000 steps of observations with shape of (100,)
observations = np.random.random((1000, 100))
# 1000 steps of actions with shape of (4,)
actions = np.random.random((1000, 4))
# 1000 steps of rewards
rewards = np.random.random(1000)
# 1000 steps of terminal flags
terminals = np.random.randint(2, size=1000)

dataset = d3rlpy.dataset.MDPDataset(observations, actions, rewards, terminals)

# save as HDF5
with open("dataset.h5", "w+b") as f:
    dataset.dump(f)

# load from HDF5
with open("dataset.h5", "rb") as f:
    new_dataset = d3rlpy.dataset.ReplayBuffer.load(f, d3rlpy.dataset.InfiniteBuffer())
```

Note that the observations, actions, rewards and terminals must be aligned with the same timestep.

```
observations = [s1, s2, s3, ...]
actions      = [a1, a2, a3, ...]
rewards      = [r1, r2, r3, ...] # r1 = r(s1, a1)
terminals    = [t1, t2, t3, ...] # t1 = t(s1, a1)
```

MDPDataset is actually a shortcut of ReplayBuffer class.

`d3rlpy.dataset.MDPDataset`

```
class d3rlpy.dataset.MDPDataset(observations, actions, rewards, terminals, timeouts=None,  
                                transition_picker=None, trajectory_slicer=None, action_space=None,  
                                action_size=None)
```

Backward-compatibility class of MDPDataset.

This is a wrapper class that has a backward-compatible constructor interface.

Parameters

- **observations** (*ObservationSequence*) – Observations.
- **actions** (*np.ndarray*) – Actions.
- **rewards** (*np.ndarray*) – Rewards.
- **terminals** (*np.ndarray*) – Environmental terminal flags.
- **timeouts** (*np.ndarray*) – Timeouts.
- **transition_picker** (*Optional[TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms. If `None` is given, `BasicTransitionPicker` is used by default.
- **trajectory_slicer** (*Optional[TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms. If `None` is given, `BasicTrajectorySlicer` is used by default.
- **action_space** (*Optional[d3rlpy.constants.ActionSpace]*) – Action-space type.
- **action_size** (*Optional[int]*) – Size of action-space. For continuous action-space, this represents dimension of action vectors. For discrete action-space, this represents the number of discrete actions.

Methods

```
append(observation, action, reward)
```

Appends observation, action and reward to buffer.

Parameters

- **observation** (*Union[`numpy.ndarray[Any, numpy.dtype[Any]]`, `Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`]*) – Observation.
- **action** (*Union[`int`, `numpy.ndarray[Any, numpy.dtype[Any]]`]*) – Action.
- **reward** (*Union[`float`, `numpy.ndarray[Any, numpy.dtype[Any]]`]*) – Reward.

Return type `None`

```
append_episode(episode)
```

Appends episode to buffer.

Parameters **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode.

Return type `None`

clip_episode(*terminated*)

Clips current episode.

Parameters **terminated** (*bool*) – Flag to represent environmental termination. This flag should be False if the episode is terminated by timeout.

Return type *None*

dump(*f*)

Dumps buffer data.

```
with open('dataset.h5', 'w+b') as f:
    replay_buffer.dump(f)
```

Parameters **f** (*BinaryIO*) – IO object to write to.

Return type *None*

classmethod **from_episode_generator**(*episode_generator, buffer, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None*)

Builds ReplayBuffer from episode generator.

Parameters

- **episode_generator** (*d3rlpy.dataset.episode_generator.EpisodeGeneratorProtocol*) – Episode generator implementation.
- **buffer** (*d3rlpy.dataset.buffers.BufferProtocol*) – Buffer implementation.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

classmethod **load**(*f, buffer, episode_cls=<class 'd3rlpy.dataset.components.Episode'>, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None*)

Builds ReplayBuffer from dumped data.

This method reconstructs replay buffer dumped by dump method.

```
with open('dataset.h5', 'rb') as f:
    replay_buffer = ReplayBuffer.load(f, buffer)
```

Parameters

- **f** (*BinaryIO*) – IO object to read from.
- **buffer** (*d3rlpy.dataset.buffers.BufferProtocol*) – Buffer implementation.
- **episode_cls** (*Type[d3rlpy.dataset.components.EpisodeBase]*) – Episode class used to reconstruct data.

- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

sample_trajectory(*length*)

Samples a partial trajectory.

Parameters **length** (*int*) – Length of partial trajectory.

Returns Partial trajectory.

Return type *d3rlpy.dataset.components.PartialTrajectory*

sample_trajectory_batch(*batch_size, length*)

Samples a mini-batch of partial trajectories.

Parameters

- **batch_size** (*int*) – Mini-batch size.
- **length** (*int*) – Length of partial trajectories.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TrajectoryMiniBatch*

sample_transition()

Samples a transition.

Returns Transition.

Return type *d3rlpy.dataset.components.Transition*

sample_transition_batch(*batch_size*)

Samples a mini-batch of transitions.

Parameters **batch_size** (*int*) – Mini-batch size.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TransitionMiniBatch*

size()

Returns number of episodes.

Returns Number of episodes.

Return type *int*

Attributes

buffer
dataset_info
episodes
trajectory_slicer
transition_count
transition_picker

4.3.2 Replay Buffer

ReplayBuffer is a class that represents an experience replay buffer in d3rlpy. In d3rlpy, ReplayBuffer is a highly modularized interface for flexibility. You can compose sub-components of ReplayBuffer, Buffer, TransitionPicker, TrajectorySlicer and WriterPreprocess to customize experiments.

```

import d3rlpy

# Buffer component
buffer = d3rlpy.dataset.FIFOBuffer(limit=1000000)

# TransitionPicker component
transition_picker = d3rlpy.dataset.BasicTransitionPicker()

# TrajectorySlicer component
trajectory_slicer = d3rlpy.dataset.BasicTrajectorySlicer()

# WriterPreprocess component
writer_preprocessor = d3rlpy.dataset.BasicWriterPreprocess()

# Need to specify signatures of observations, actions and rewards

# Option 1: Initialize with Gym environment
import gym
env = gym.make("Pendulum-v1")
replay_buffer = d3rlpy.dataset.ReplayBuffer(
    buffer=buffer,
    transition_picker=transition_picker,
    trajectory_slicer=trajectory_slicer,
    writer_preprocessor=writer_preprocessor,
    env=env,
)

# Option 2: Initialize with pre-collected dataset
dataset, _ = d3rlpy.datasets.get_pendulum()
replay_buffer = d3rlpy.dataset.ReplayBuffer(
    buffer=buffer,
    transition_picker=transition_picker,
    trajectory_slicer=trajectory_slicer,
    writer_preprocessor=writer_preprocessor,
    episodes=dataset.episodes,

```

(continues on next page)

```

)

# Option 3: Initialize with manually specified signatures
observation_signature = d3rlpy.dataset.Signature(shape=[(3,)], dtype=[np.float32])
action_signature = d3rlpy.dataset.Signature(shape=[(1,)], dtype=[np.float32])
reward_signature = d3rlpy.dataset.Signature(shape=[(1,)], dtype=[np.float32])
replay_buffer = d3rlpy.dataset.ReplayBuffer(
    buffer=buffer,
    transition_picker=transition_picker,
    trajectory_slicer=trajectory_slicer,
    writer_preprocessor=writer_preprocessor,
    observation_signature=observation_signature,
    action_signature=action_signature,
    reward_signature=reward_signature,
)

# shortcut
replay_buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

```

<code>d3rlpy.dataset.ReplayBufferBase</code>	An interface of ReplayBuffer.
<code>d3rlpy.dataset.ReplayBuffer</code>	Replay buffer for experience replay.
<code>d3rlpy.dataset.MixedReplayBuffer</code>	A class combining two replay buffer instances.
<code>d3rlpy.dataset.create_infinite_replay_buffer</code>	Builds infinite replay buffer.
<code>d3rlpy.dataset.create_fifo_replay_buffer</code>	Builds FIFO replay buffer.

d3rlpy.dataset.ReplayBufferBase

class d3rlpy.dataset.ReplayBufferBase

An interface of ReplayBuffer.

Methods

abstract `append(observation, action, reward)`

Appends observation, action and reward to buffer.

Parameters

- **observation** (`Union[numpy.ndarray\[Any, numpy.dtype\[Any\]\], Sequence[numpy.ndarray\[Any, numpy.dtype\[Any\]\]]) – Observation.`
- **action** (`Union[int, numpy.ndarray\[Any, numpy.dtype\[Any\]\]]`) – Action.
- **reward** (`Union[float, numpy.ndarray\[Any, numpy.dtype\[Any\]\]]`) – Reward.

Return type `None`

abstract `append_episode(episode)`

Appends episode to buffer.

Parameters `episode` (`d3rlpy.dataset.components.EpisodeBase`) – Episode.

Return type `None`

abstract clip_episode(*terminated*)

Clips current episode.

Parameters **terminated** (*bool*) – Flag to represent environmental termination. This flag should be False if the episode is terminated by timeout.

Return type *None*

abstract dump(*f*)

Dumps buffer data.

```
with open('dataset.h5', 'w+b') as f:
    replay_buffer.dump(f)
```

Parameters **f** (*BinaryIO*) – IO object to write to.

Return type *None*

abstract classmethod from_episode_generator(*episode_generator, buffer, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None*)

Builds ReplayBuffer from episode generator.

Parameters

- **episode_generator** (*d3rlpy.dataset.episode_generator.EpisodeGeneratorProtocol*) – Episode generator implementation.
- **buffer** (*d3rlpy.dataset.buffers.BufferProtocol*) – Buffer implementation.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

abstract classmethod load(*f, buffer, episode_cls=<class 'd3rlpy.dataset.components.Episode'>, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None*)

Builds ReplayBuffer from dumped data.

This method reconstructs replay buffer dumped by dump method.

```
with open('dataset.h5', 'rb') as f:
    replay_buffer = ReplayBuffer.load(f, buffer)
```

Parameters

- **f** (*BinaryIO*) – IO object to read from.
- **buffer** (*d3rlpy.dataset.buffers.BufferProtocol*) – Buffer implementation.
- **episode_cls** (*Type[d3rlpy.dataset.components.EpisodeBase]*) – Episode class used to reconstruct data.

- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

abstract sample_trajectory(*length*)

Samples a partial trajectory.

Parameters **length** (*int*) – Length of partial trajectory.

Returns Partial trajectory.

Return type *d3rlpy.dataset.components.PartialTrajectory*

abstract sample_trajectory_batch(*batch_size*, *length*)

Samples a mini-batch of partial trajectories.

Parameters

- **batch_size** (*int*) – Mini-batch size.
- **length** (*int*) – Length of partial trajectories.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TrajectoryMiniBatch*

abstract sample_transition()

Samples a transition.

Returns Transition.

Return type *d3rlpy.dataset.components.Transition*

abstract sample_transition_batch(*batch_size*)

Samples a mini-batch of transitions.

Parameters **batch_size** (*int*) – Mini-batch size.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TransitionMiniBatch*

abstract size()

Returns number of episodes.

Returns Number of episodes.

Return type *int*

Attributes

buffer

Returns buffer.

Returns Buffer.

dataset_info

Returns dataset information.

Returns Dataset information.

episodes

Returns sequence of episodes.

Returns Sequence of episodes.

trajectory_slicer

Returns trajectory slicer.

Returns Trajectory slicer.

transition_count

Returns number of transitions.

Returns Number of transitions.

transition_picker

Returns transition picker.

Returns Transition picker.

d3rlpy.dataset.ReplayBuffer

```
class d3rlpy.dataset.ReplayBuffer(buffer, transition_picker=None, trajectory_slicer=None,
                                writer_preprocessor=None, episodes=None, env=None,
                                observation_signature=None, action_signature=None,
                                reward_signature=None, action_space=None, action_size=None,
                                cache_size=10000)
```

Replay buffer for experience replay.

This replay buffer implementation is used for both online and offline training in d3rlpy. To determine shapes of observations, actions and rewards, one of episodes, env and signatures must be provided.

```
from d3rlpy.dataset import FIFOBuffer, ReplayBuffer, Signature

buffer = FIFOBuffer(limit=10000000)

# initialize with pre-collected episodes
replay_buffer = ReplayBuffer(buffer=buffer, episodes=<episodes>)

# initialize with Gym
replay_buffer = ReplayBuffer(buffer=buffer, env=<env>)

# initialize with manually specified signatures
replay_buffer = ReplayBuffer(
    buffer=buffer,
    observation_signature=Signature(dtype=[<dtype>], shape=[<shape>]),
    action_signature=Signature(dtype=[<dtype>], shape=[<shape>]),
```

(continues on next page)

(continued from previous page)

```
reward_signature=Signature(dtype=[<dtype>], shape=[<shape>]),
)
```

Parameters

- **buffer** (`d3rlpy.dataset.BufferProtocol`) – Buffer implementation.
- **transition_picker** (`Optional[d3rlpy.dataset.TransitionPickerProtocol]`) – Transition picker implementation for Q-learning-based algorithms. If `None` is given, `BasicTransitionPicker` is used by default.
- **trajectory_slicer** (`Optional[d3rlpy.dataset.TrajectorySlicerProtocol]`) – Trajectory slicer implementation for Transformer-based algorithms. If `None` is given, `BasicTrajectorySlicer` is used by default.
- **writer_preprocessor** (`Optional[d3rlpy.dataset.WriterPreprocessProtocol]`) – Writer preprocessor implementation. If `None` is given, `BasicWriterPreprocess` is used by default.
- **episodes** (`Optional[Sequence[d3rlpy.dataset.EpisodeBase]]`) – List of episodes to initialize replay buffer.
- **env** (`Optional[GymEnv]`) – Gym environment to extract shapes of observations and action.
- **observation_signature** (`Optional[d3rlpy.dataset.Signature]`) – Signature of observation.
- **action_signature** (`Optional[d3rlpy.dataset.Signature]`) – Signature of action.
- **reward_signature** (`Optional[d3rlpy.dataset.Signature]`) – Signature of reward.
- **action_space** (`Optional[d3rlpy.constants.ActionSpace]`) – Action-space type.
- **action_size** (`Optional[int]`) – Size of action-space. For continuous action-space, this represents dimension of action vectors. For discrete action-space, this represents the number of discrete actions.
- **cache_size** (`int`) – Size of cache to record active episode history used for online training. `cache_size` needs to be greater than the maximum possible episode length.

Methods

append(*observation, action, reward*)

Appends observation, action and reward to buffer.

Parameters

- **observation** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observation.
- **action** (`Union[int, numpy.ndarray[Any, numpy.dtype[Any]]]`) – Action.
- **reward** (`Union[float, numpy.ndarray[Any, numpy.dtype[Any]]]`) – Reward.

Return type `None`

append_episode(*episode*)

Appends episode to buffer.

Parameters **episode** (`d3rlpy.dataset.components.EpisodeBase`) – Episode.

Return type `None`

clip_episode(*terminated*)

Clips current episode.

Parameters **terminated** (*bool*) – Flag to represent environmental termination. This flag should be False if the episode is terminated by timeout.

Return type `None`

dump(*f*)

Dumps buffer data.

```
with open('dataset.h5', 'w+b') as f:
    replay_buffer.dump(f)
```

Parameters **f** (*BinaryIO*) – IO object to write to.

Return type `None`

classmethod from_episode_generator(*episode_generator, buffer, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None*)

Builds ReplayBuffer from episode generator.

Parameters

- **episode_generator** (*d3rlpy.dataset.episode_generator.EpisodeGeneratorProtocol*) – Episode generator implementation.
- **buffer** (*d3rlpy.dataset.buffer.BufferProtocol*) – Buffer implementation.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

classmethod load(*f, buffer, episode_cls=<class 'd3rlpy.dataset.components.Episode'>, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None*)

Builds ReplayBuffer from dumped data.

This method reconstructs replay buffer dumped by dump method.

```
with open('dataset.h5', 'rb') as f:
    replay_buffer = ReplayBuffer.load(f, buffer)
```

Parameters

- **f** (*BinaryIO*) – IO object to read from.
- **buffer** (*d3rlpy.dataset.buffer.BufferProtocol*) – Buffer implementation.

- **episode_cls** (*Type[d3rlpy.dataset.components.EpisodeBase]*) – Episode class used to reconstruct data.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

sample_trajectory(*length*)

Samples a partial trajectory.

Parameters **length** (*int*) – Length of partial trajectory.

Returns Partial trajectory.

Return type *d3rlpy.dataset.components.PartialTrajectory*

sample_trajectory_batch(*batch_size, length*)

Samples a mini-batch of partial trajectories.

Parameters

- **batch_size** (*int*) – Mini-batch size.
- **length** (*int*) – Length of partial trajectories.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TrajectoryMiniBatch*

sample_transition()

Samples a transition.

Returns Transition.

Return type *d3rlpy.dataset.components.Transition*

sample_transition_batch(*batch_size*)

Samples a mini-batch of transitions.

Parameters **batch_size** (*int*) – Mini-batch size.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TransitionMiniBatch*

size()

Returns number of episodes.

Returns Number of episodes.

Return type *int*

Attributes

buffer
dataset_info
episodes
trajectory_slicer
transition_count
transition_picker

d3rlpy.dataset.MixedReplayBuffer

class d3rlpy.dataset.MixedReplayBuffer(*primary_replay_buffer, secondary_replay_buffer, secondary_mix_ratio*)

A class combining two replay buffer instances.

This replay buffer implementation combines two replay buffers (e.g. offline buffer and online buffer). The primary replay buffer is exposed to methods such as `append`. Mini-batches are sampled from each replay buffer based on `secondary_mix_ratio`.

```
import d3rlpy

# offline dataset
dataset, env = d3rlpy.datasets.get_cartpole()

# online replay buffer
online_buffer = d3rlpy.dataset.create_fifo_replay_buffer(
    limit=1000000,
    env=env,
)

# combine two replay buffers
replay_buffer = d3rlpy.dataset.MixedReplayBuffer(
    primary_replay_buffer=online_buffer,
    secondary_replay_buffer=dataset,
    secondary_mix_ratio=0.5,
)
```

Parameters

- **primary_replay_buffer** (d3rlpy.dataset.ReplayBufferBase) – Primary replay buffer.
- **secondary_replay_buffer** (d3rlpy.dataset.ReplayBufferBase) – Secondary replay buffer.
- **secondary_mix_ratio** (*float*) – Ratio to sample mini-batches from the secondary replay buffer.

Methods

append(*observation*, *action*, *reward*)

Appends observation, action and reward to buffer.

Parameters

- **observation** (*Union*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]], *Sequence*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]]) – Observation.
- **action** (*Union*[*int*, *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]]) – Action.
- **reward** (*Union*[*float*, *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]]) – Reward.

Return type *None*

append_episode(*episode*)

Appends episode to buffer.

Parameters **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode.

Return type *None*

clip_episode(*terminated*)

Clips current episode.

Parameters **terminated** (*bool*) – Flag to represent environmental termination. This flag should be *False* if the episode is terminated by timeout.

Return type *None*

dump(*f*)

Dumps buffer data.

```
with open('dataset.h5', 'w+b') as f:
    replay_buffer.dump(f)
```

Parameters **f** (*BinaryIO*) – IO object to write to.

Return type *None*

classmethod from_episode_generator(*episode_generator*, *buffer*, *transition_picker=None*,
trajectory_slicer=None, *writer_preprocessor=None*)

Builds ReplayBuffer from episode generator.

Parameters

- **episode_generator** (*d3rlpy.dataset.episode_generator.EpisodeGeneratorProtocol*) – Episode generator implementation.
- **buffer** (*d3rlpy.dataset.buffers.BufferProtocol*) – Buffer implementation.
- **transition_picker** (*Optional*[*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*]) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional*[*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*]) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional*[*d3rlpy.dataset.writers.WriterPreprocessProtocol*]) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

classmethod `load(f, buffer, episode_cls=<class 'd3rlpy.dataset.components.Episode'>, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None)`

Builds ReplayBuffer from dumped data.

This method reconstructs replay buffer dumped by `dump` method.

```
with open('dataset.h5', 'rb') as f:
    replay_buffer = ReplayBuffer.load(f, buffer)
```

Parameters

- **f** (*BinaryIO*) – IO object to read from.
- **buffer** (*d3rlpy.dataset.buffer.BufferProtocol*) – Buffer implementation.
- **episode_cls** (*Type[d3rlpy.dataset.components.EpisodeBase]*) – Episode class used to reconstruct data.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

sample_trajectory(*length*)

Samples a partial trajectory.

Parameters **length** (*int*) – Length of partial trajectory.

Returns Partial trajectory.

Return type *d3rlpy.dataset.components.PartialTrajectory*

sample_trajectory_batch(*batch_size, length*)

Samples a mini-batch of partial trajectories.

Parameters

- **batch_size** (*int*) – Mini-batch size.
- **length** (*int*) – Length of partial trajectories.

Returns Mini-batch.

Return type *d3rlpy.dataset.mini_batch.TrajectoryMiniBatch*

sample_transition()

Samples a transition.

Returns Transition.

Return type *d3rlpy.dataset.components.Transition*

sample_transition_batch(*batch_size*)

Samples a mini-batch of transitions.

Parameters **batch_size** (*int*) – Mini-batch size.

Returns Mini-batch.

Return type `d3rlpy.dataset.mini_batch.TransitionMiniBatch`

size()

Returns number of episodes.

Returns Number of episodes.

Return type *int*

Attributes

buffer

dataset_info

episodes

primary_replay_buffer

secondary_replay_buffer

trajectory_slicer

transition_count

transition_picker

d3rlpy.dataset.create_infinite_replay_buffer

`d3rlpy.dataset.create_infinite_replay_buffer`(*episodes=None, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None, env=None*)

Builds infinite replay buffer.

This function is a shortcut alias to build replay buffer with `InfiniteBuffer`.

Parameters

- **episodes** (*Optional[Sequence[d3rlpy.dataset.components.EpisodeBase]]*) – List of episodes to initialize replay buffer.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms. If `None` is given, `BasicTransitionPicker` is used by default.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms. If `None` is given, `BasicTrajectorySlicer` is used by default.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation. If `None` is given, `BasicWriterPreprocess` is used by default.
- **env** (*Optional[Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]]*) – Gym environment to extract shapes of observations and action.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

d3rlpy.dataset.create_fifo_replay_buffer

`d3rlpy.dataset.create_fifo_replay_buffer(limit, episodes=None, transition_picker=None, trajectory_slicer=None, writer_preprocessor=None, env=None)`

Builds FIFO replay buffer.

This function is a shortcut alias to build replay buffer with `FIFOBuffer`.

Parameters

- **limit** (*int*) – Maximum capacity of FIFO buffer.
- **episodes** (*Optional[Sequence[d3rlpy.dataset.components.EpisodeBase]]*) – List of episodes to initialize replay buffer.
- **transition_picker** (*Optional[d3rlpy.dataset.transition_pickers.TransitionPickerProtocol]*) – Transition picker implementation for Q-learning-based algorithms. If `None` is given, `BasicTransitionPicker` is used by default.
- **trajectory_slicer** (*Optional[d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol]*) – Trajectory slicer implementation for Transformer-based algorithms. If `None` is given, `BasicTrajectorySlicer` is used by default.
- **writer_preprocessor** (*Optional[d3rlpy.dataset.writers.WriterPreprocessProtocol]*) – Writer preprocessor implementation. If `None` is given, `BasicWriterPreprocess` is used by default.
- **env** (*Optional[Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]]*) – Gym environment to extract shapes of observations and action.

Returns Replay buffer.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

4.3.3 Buffer

Buffer is a list-like component that stores and drops transitions.

<i>d3rlpy.dataset.BufferProtocol</i>	Interface of Buffer.
<i>d3rlpy.dataset.InfiniteBuffer</i>	Buffer with unlimited capacity.
<i>d3rlpy.dataset.FIFOBuffer</i>	FIFO buffer.

d3rlpy.dataset.BufferProtocol

class d3rlpy.dataset.**BufferProtocol**(*args, **kwargs)
Interface of Buffer.

Methods

__getitem__(*index*)

Parameters *index* (*int*) –

Return type Tuple[d3rlpy.dataset.components.EpisodeBase, *int*]

append(*episode*, *index*)
Adds transition to buffer.

Parameters

- **episode** (d3rlpy.dataset.components.EpisodeBase) – Episode object.
- **index** (*int*) – Transition index.

Return type *None*

Attributes

episodes
Returns list of episodes.

Returns List of saved episodes.

transition_count
Returns the number of transitions.

Returns Number of transitions.

d3rlpy.dataset.InfiniteBuffer

class d3rlpy.dataset.**InfiniteBuffer**
Buffer with unlimited capacity.

Methods

__getitem__(*index*)

Parameters *index* (*int*) –

Return type Tuple[d3rlpy.dataset.components.EpisodeBase, *int*]

__len__()

Return type *int*

append(*episode*, *index*)
Adds transition to buffer.

Parameters

- **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode object.
- **index** (*int*) – Transition index.

Return type *None*

Attributes

episodes

transition_count

d3rlpy.dataset.FIFOBuffer

class *d3rlpy.dataset.FIFOBuffer*(*limit*)
FIFO buffer.

Parameters **limit** (*int*) – buffer capacity.

Methods

__getitem__(*index*)

Parameters **index** (*int*) –

Return type *Tuple[d3rlpy.dataset.components.EpisodeBase, int]*

__len__()

Return type *int*

append(*episode*, *index*)
Adds transition to buffer.

Parameters

- **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode object.
- **index** (*int*) – Transition index.

Return type *None*

Attributes

episodes
transition_count

4.3.4 TransitionPicker

TransitionPicker is a component that defines how to pick transition data used for Q-learning-based algorithms. You can also implement your own TransitionPicker for custom experiments.

```

import d3rlpy

# Example TransitionPicker that simply picks transition
class CustomTransitionPicker(d3rlpy.dataset.TransitionPickerProtocol):
    def __call__(self, episode: d3rlpy.dataset.EpisodeBase, index: int) -> d3rlpy.
        ↪ dataset.Transition:
        observation = episode.observations[index]
        is_terminal = episode.terminated and index == episode.size() - 1
        if is_terminal:
            next_observation = d3rlpy.dataset.create_zero_observation(observation)
        else:
            next_observation = episode.observations[index + 1]
        return d3rlpy.dataset.Transition(
            observation=observation,
            action=episode.actions[index],
            reward=episode.rewards[index],
            next_observation=next_observation,
            terminal=float(is_terminal),
            interval=1,
        )

```

<code>d3rlpy.dataset.TransitionPickerProtocol</code>	Interface of TransitionPicker.
<code>d3rlpy.dataset.BasicTransitionPicker</code>	Standard transition picker.
<code>d3rlpy.dataset.FrameStackTransitionPicker</code>	Frame-stacking transition picker.
<code>d3rlpy.dataset.MultiStepTransitionPicker</code>	Multi-step transition picker.

d3rlpy.dataset.TransitionPickerProtocol

class d3rlpy.dataset.TransitionPickerProtocol(*args, **kwargs)
Interface of TransitionPicker.

Methods

__call__(episode, index)
Returns transition specified by index.

Parameters

- **episode** (d3rlpy.dataset.components.EpisodeBase) – Episode.
- **index** (int) – Index at the target transition.

Returns Transition.

Return type d3rlpy.dataset.components.Transition

d3rlpy.dataset.BasicTransitionPicker

class d3rlpy.dataset.BasicTransitionPicker(gamma=0.99)
Standard transition picker.

This class implements a basic transition picking.

Parameters **gamma** (float) – Discount factor to compute return-to-go.

Methods

__call__(episode, index)
Returns transition specified by index.

Parameters

- **episode** (d3rlpy.dataset.components.EpisodeBase) – Episode.
- **index** (int) – Index at the target transition.

Returns Transition.

Return type d3rlpy.dataset.components.Transition

d3rlpy.dataset.FrameStackTransitionPicker

class d3rlpy.dataset.FrameStackTransitionPicker(n_frames, gamma=0.99)
Frame-stacking transition picker.

This class implements the frame-stacking logic. The observations are stacked with the last `n_frames-1` frames. When `index` specifies timestep below `n_frames`, those frames are padded by zeros.

```
episode = Episode(
    observations=np.random.random((100, 1, 84, 84)),
    actions=np.random.random((100, 2)),
    rewards=np.random.random((100, 1)),
    terminated=False,
```

(continues on next page)

(continued from previous page)

```
)  
  
frame_stacking_picker = FrameStackTransitionPicker(n_frames=4)  
transition = frame_stacking_picker(episode, 10)  
  
transition.observation.shape == (4, 84, 84)
```

Parameters

- **n_frames** (*int*) – Number of frames to stack.
- **gamma** (*float*) – Discount factor to compute return-to-go.

Methods**__call__**(*episode, index*)

Returns transition specified by index.

Parameters

- **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode.
- **index** (*int*) – Index at the target transition.

Returns Transition.**Return type** *d3rlpy.dataset.components.Transition***d3rlpy.dataset.MultiStepTransitionPicker****class** *d3rlpy.dataset.MultiStepTransitionPicker*(*n_steps, gamma*)

Multi-step transition picker.

This class implements transition picking for the multi-step TD error. **reward** is computed as a multi-step discounted return.

Parameters

- **n_steps** – Delta timestep between observation and net_observation.
- **gamma** – Discount factor to compute a multi-step return.

Methods**__call__**(*episode, index*)

Returns transition specified by index.

Parameters

- **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode.
- **index** (*int*) – Index at the target transition.

Returns Transition.**Return type** *d3rlpy.dataset.components.Transition*

4.3.5 TrajectorySlicer

TrajectorySlicer is a component that defines how to slice trajectory data used for Decision Transformer-based algorithms. You can also implement your own TrajectorySlicer for custom experiments.

```
import d3rlpy

class CustomTrajectorySlicer(d3rlpy.dataset.TrajectorySlicerProtocol):
    def __call__(
        self, episode: d3rlpy.dataset.EpisodeBase, end_index: int, size: int
    ) -> d3rlpy.dataset.PartialTrajectory:
        end = end_index + 1
        start = max(end - size, 0)
        actual_size = end - start

        # prepare terminal flags
        terminals = np.zeros((actual_size, 1), dtype=np.float32)
        if episode.terminated and end_index == episode.size() - 1:
            terminals[-1][0] = 1.0

        # slice data
        observations = episode.observations[start:end]
        actions = episode.actions[start:end]
        rewards = episode.rewards[start:end]
        ret = np.sum(episode.rewards[start:])
        all_returns_to_go = ret - np.cumsum(episode.rewards[start:], axis=0)
        returns_to_go = all_returns_to_go[:actual_size].reshape((-1, 1))

        # prepare metadata
        timesteps = np.arange(start, end)
        masks = np.ones(end - start, dtype=np.float32)

        # compute backward padding size
        pad_size = size - actual_size

        if pad_size == 0:
            return d3rlpy.dataset.PartialTrajectory(
                observations=observations,
                actions=actions,
                rewards=rewards,
                returns_to_go=returns_to_go,
                terminals=terminals,
                timesteps=timesteps,
                masks=masks,
                length=size,
            )

        return d3rlpy.dataset.PartialTrajectory(
            observations=d3rlpy.dataset.batch_pad_observations(observations, pad_size),
            actions=d3rlpy.dataset.batch_pad_array(actions, pad_size),
            rewards=d3rlpy.dataset.batch_pad_array(rewards, pad_size),
            returns_to_go=d3rlpy.dataset.batch_pad_array(returns_to_go, pad_size),
            terminals=d3rlpy.dataset.batch_pad_array(terminals, pad_size),
```

(continues on next page)

(continued from previous page)

```

        timesteps=d3rlpy.dataset.batch_pad_array(timesteps, pad_size),
        masks=d3rlpy.dataset.batch_pad_array(masks, pad_size),
        length=size,
    )

```

<code>d3rlpy.dataset.TrajectorySlicerProtocol</code>	Interface of TrajectorySlicer.
<code>d3rlpy.dataset.BasicTrajectorySlicer</code>	Standard trajectory slicer.
<code>d3rlpy.dataset.FrameStackTrajectorySlicer</code>	Frame-stacking trajectory slicer.

d3rlpy.dataset.TrajectorySlicerProtocol

class d3rlpy.dataset.TrajectorySlicerProtocol(*args, **kwargs)
Interface of TrajectorySlicer.

Methods

__call__(episode, end_index, size)
Slice trajectory.

This method returns a partial trajectory from $t=\text{end_index-size}$ to $t=\text{end_index}$. If end_index-size is smaller than 0, those parts will be padded by zeros.

Parameters

- **episode** (`d3rlpy.dataset.components.EpisodeBase`) – Episode.
- **end_index** (`int`) – Index at the end of the sliced trajectory.
- **size** (`int`) – Length of the sliced trajectory.

Returns Sliced trajectory.

Return type `d3rlpy.dataset.components.PartialTrajectory`

d3rlpy.dataset.BasicTrajectorySlicer

class d3rlpy.dataset.BasicTrajectorySlicer(*args, **kwargs)
Standard trajectory slicer.

This class implements a basic trajectory slicing.

Methods

__call__(episode, end_index, size)
Slice trajectory.

This method returns a partial trajectory from $t=\text{end_index-size}$ to $t=\text{end_index}$. If end_index-size is smaller than 0, those parts will be padded by zeros.

Parameters

- **episode** (`d3rlpy.dataset.components.EpisodeBase`) – Episode.
- **end_index** (`int`) – Index at the end of the sliced trajectory.

- **size** (*int*) – Length of the sliced trajectory.

Returns Sliced trajectory.

Return type d3rlpy.dataset.components.PartialTrajectory

d3rlpy.dataset.FrameStackTrajectorySlicer

class d3rlpy.dataset.FrameStackTrajectorySlicer(*n_frames*)

Frame-stacking trajectory slicer.

This class implements the frame-stacking logic. The observations are stacked with the last *n_frames*-1 frames. When *index* specifies timestep below *n_frames*, those frames are padded by zeros.

```
episode = Episode(
    observations=np.random.random((100, 1, 84, 84)),
    actions=np.random.random((100, 2)),
    rewards=np.random.random((100, 1)),
    terminated=False,
)

frame_stacking_slicer = FrameStackTrajectorySlicer(n_frames=4)
trajectory = frame_stacking_slicer(episode, 0, 10)

trajectory.observations.shape == (10, 4, 84, 84)
```

Parameters *n_frames* – Number of frames to stack.

Methods

__call__(*episode, end_index, size*)

Slice trajectory.

This method returns a partial trajectory from *t=end_index-size* to *t=end_index*. If *end_index-size* is smaller than 0, those parts will be padded by zeros.

Parameters

- **episode** (*d3rlpy.dataset.components.EpisodeBase*) – Episode.
- **end_index** (*int*) – Index at the end of the sliced trajectory.
- **size** (*int*) – Length of the sliced trajectory.

Returns Sliced trajectory.

Return type d3rlpy.dataset.components.PartialTrajectory

4.3.6 WriterPreprocess

WriterPreprocess is a component that defines how to write experiences to an experience replay buffer. You can also implement your own WriterPreprocess for custom experiments.

```
import d3rlpy

class CustomWriterPreprocess(d3rlpy.dataset.WriterPreprocessProtocol):
    def process_observation(self, observation: d3rlpy.dataset.Observation) -> d3rlpy.
        ↪dataset.Observation:
        return observation

    def process_action(self, action: np.ndarray) -> np.ndarray:
        return action

    def process_reward(self, reward: np.ndarray) -> np.ndarray:
        return reward
```

<code>d3rlpy.dataset.WriterPreprocessProtocol</code>	Interface of WriterPreprocess.
<code>d3rlpy.dataset.BasicWriterPreprocess</code>	Stanard data writer.
<code>d3rlpy.dataset.LastFrameWriterPreprocess</code>	Data writer that writes the last channel of observation.

d3rlpy.dataset.WriterPreprocessProtocol

class d3rlpy.dataset.WriterPreprocessProtocol(*args, **kwargs)

Interface of WriterPreprocess.

Methods

process_action(action)

Processes action.

Parameters **action** (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Action.

Returns Processed action.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

process_observation(observation)

Processes observation.

Parameters **observation** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observation.

Returns Processed observation.

Return type `Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`

process_reward(reward)

Processes reward.

Parameters **reward** (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Reward.

Returns Processed reward.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

d3rlpy.dataset.BasicWriterPreprocess

class d3rlpy.dataset.**BasicWriterPreprocess**(*args, **kwargs)

Stanard data writer.

This class implements identity preprocess.

Methods

process_action(*action*)

Processes action.

Parameters *action* (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Action.

Returns Processed action.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

process_observation(*observation*)

Processes observation.

Parameters *observation* (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observation.

Returns Processed observation.

Return type `Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`

process_reward(*reward*)

Processes reward.

Parameters *reward* (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Reward.

Returns Processed reward.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

d3rlpy.dataset.LastFrameWriterPreprocess

class d3rlpy.dataset.**LastFrameWriterPreprocess**(*args, **kwargs)

Data writer that writes the last channel of observation.

This class is designed to be used with `FrameStackTransitionPicker`.

Methods

process_action(*action*)

Processes action.

Parameters *action* (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Action.

Returns Processed action.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

process_observation(*observation*)

Processes observation.

Parameters *observation* (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observation.

Returns Processed observation.

Return type Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]]

process_reward(*reward*)

Processes reward.

Parameters **reward** (numpy.ndarray[Any, numpy.dtype[Any]]) – Reward.

Returns Processed reward.

Return type numpy.ndarray[Any, numpy.dtype[Any]]

4.4 Datasets

d3rlpy provides datasets for experimenting data-driven deep reinforcement learning algorithms.

<code>d3rlpy.datasets.get_cartpole</code>	Returns cartpole dataset and environment.
<code>d3rlpy.datasets.get_pendulum</code>	Returns pendulum dataset and environment.
<code>d3rlpy.datasets.get_atari</code>	Returns atari dataset and environment.
<code>d3rlpy.datasets.get_atari_transitions</code>	Returns atari dataset as a list of Transition objects and environment.
<code>d3rlpy.datasets.get_d4rl</code>	Returns d4rl dataset and environment.
<code>d3rlpy.datasets.get_dataset</code>	Returns dataset and environment by guessing from name.
<code>d3rlpy.datasets.get_minari</code>	Returns minari dataset and environment.

4.4.1 d3rlpy.datasets.get_cartpole

`d3rlpy.datasets.get_cartpole(dataset_type='replay', transition_picker=None, trajectory_slicer=None, render_mode=None)`

Returns cartpole dataset and environment.

The dataset is automatically downloaded to `d3rlpy_data/cartpole.h5` if it does not exist.

Parameters

- **dataset_type** (*str*) – dataset type. Available options are ['replay', 'random'].
- **transition_picker** (*Optional* [`d3rlpy.dataset.transition_pickers.TransitionPickerProtocol`]) – TransitionPickerProtocol object.
- **trajectory_slicer** (*Optional* [`d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol`]) – TrajectorySlicerProtocol object.
- **render_mode** (*Optional* [*str*]) – Mode of rendering (human, rgb_array).

Returns tuple of `d3rlpy.dataset.ReplayBuffer` and gym environment.

Return type Tuple[`d3rlpy.dataset.replay_buffer.ReplayBuffer`, gym.core.Env[numpy.ndarray[Any, numpy.dtype[Any]], int]]

4.4.2 d3rlpy.datasets.get_pendulum

`d3rlpy.datasets.get_pendulum(dataset_type='replay', transition_picker=None, trajectory_slicer=None, render_mode=None)`

Returns pendulum dataset and environment.

The dataset is automatically downloaded to `d3rlpy_data/pendulum.h5` if it does not exist.

Parameters

- **dataset_type** (*str*) – dataset type. Available options are ['replay', 'random'].
- **transition_picker** (*Optional*[`d3rlpy.dataset.transition_pickers.TransitionPickerProtocol`]) – TransitionPickerProtocol object.
- **trajectory_slicer** (*Optional*[`d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol`]) – TrajectorySlicerProtocol object.
- **render_mode** (*Optional*[*str*]) – Mode of rendering (human, rgb_array).

Returns tuple of `d3rlpy.dataset.ReplayBuffer` and gym environment.

Return type Tuple[`d3rlpy.dataset.replay_buffer.ReplayBuffer`, `gym.core.Env`[`numpy.ndarray`[Any, `numpy.dtype`[Any]], `numpy.ndarray`[Any, `numpy.dtype`[Any]]]

4.4.3 d3rlpy.datasets.get_atari

`d3rlpy.datasets.get_atari(env_name, num_stack=None, sticky_action=True, pre_stack=False, render_mode=None)`

Returns atari dataset and environment.

The dataset is provided through d4rl-atari. See more details including available dataset from its GitHub page.

```
from d3rlpy.datasets import get_atari

dataset, env = get_atari('breakout-mixed-v0')
```

References

- <https://github.com/takuseno/d4rl-atari>

Parameters

- **env_name** (*str*) – environment id of d4rl-atari dataset.
- **num_stack** (*Optional*[*int*]) – the number of frames to stack (only applied to env).
- **sticky_action** (*bool*) – Flag to enable sticky action.
- **pre_stack** (*bool*) – Flag to pre-stack observations. If this is False, `FrameStackTransitionPicker` and `FrameStackTrajectorySlicer` will be used to stack observations at sampling-time.
- **render_mode** (*Optional*[*str*]) – Mode of rendering (human, rgb_array).

Returns tuple of `d3rlpy.dataset.ReplayBuffer` and gym environment.

Return type Tuple[`d3rlpy.dataset.replay_buffer.ReplayBuffer`, `gym.core.Env`[`numpy.ndarray`[Any, `numpy.dtype`[Any]], *int*]

4.4.4 d3rlpy.datasets.get_atari_transitions

`d3rlpy.datasets.get_atari_transitions(game_name, fraction=0.01, index=0, num_stack=None, sticky_action=True, pre_stack=False, render_mode=None)`

Returns atari dataset as a list of Transition objects and environment.

The dataset is provided through d4rl-atari. The difference from `get_atari` function is that this function will sample transitions from all epochs. This function is necessary for reproducing Atari experiments.

```
from d3rlpy.datasets import get_atari_transitions

# get 1% of transitions from all epochs (1M x 50 epoch x 1% = 0.5M)
dataset, env = get_atari_transitions('breakout', fraction=0.01)
```

References

- <https://github.com/takuseno/d4rl-atari>

Parameters

- **game_name** (*str*) – Atari 2600 game name in lower_snake_case.
- **fraction** (*float*) – fraction of sampled transitions.
- **index** (*int*) – index to specify which trial to load.
- **num_stack** (*Optional[int]*) – the number of frames to stack (only applied to env).
- **sticky_action** (*bool*) – Flag to enable sticky action.
- **pre_stack** (*bool*) – Flag to pre-stack observations. If this is False, `FrameStackTransitionPicker` and `FrameStackTrajectorySlicer` will be used to stack observations at sampling-time.
- **render_mode** (*Optional[str]*) – Mode of rendering (human, rgb_array).

Returns tuple of a list of `d3rlpy.dataset.Transition` and gym environment.

Return type `Tuple[d3rlpy.dataset.replay_buffer.ReplayBuffer, gym.core.Env[numpy.ndarray[Any, numpy.dtype[Any]], int]]`

4.4.5 d3rlpy.datasets.get_d4rl

`d3rlpy.datasets.get_d4rl(env_name, transition_picker=None, trajectory_slicer=None, render_mode=None)`

Returns d4rl dataset and environment.

The dataset is provided through d4rl.

```
from d3rlpy.datasets import get_d4rl

dataset, env = get_d4rl('hopper-medium-v0')
```

References

- Fu et al., D4RL: Datasets for Deep Data-Driven Reinforcement Learning.
- <https://github.com/rail-berkeley/d4rl>

Parameters

- **env_name** (*str*) – environment id of d4rl dataset.
- **transition_picker** (*Optional*[*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*]) – TransitionPickerProtocol object.
- **trajectory_slicer** (*Optional*[*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*]) – TrajectorySlicerProtocol object.
- **render_mode** (*Optional*[*str*]) – Mode of rendering (human, rgb_array).

Returns tuple of *d3rlpy.dataset.ReplayBuffer* and gym environment.

Return type *Tuple*[*d3rlpy.dataset.replay_buffer.ReplayBuffer*, *gym.core.Env*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]], *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]]

4.4.6 d3rlpy.datasets.get_dataset

d3rlpy.datasets.get_dataset(env_name, transition_picker=None, trajectory_slicer=None, render_mode=None)

Returns dataset and environment by guessing from name.

This function returns dataset by matching name with the following datasets.

- cartpole-replay
- cartpole-random
- pendulum-replay
- pendulum-random
- d4rl-pybullet
- d4rl-atari
- d4rl

```
import d3rlpy

# cartpole dataset
dataset, env = d3rlpy.datasets.get_dataset('cartpole')

# pendulum dataset
dataset, env = d3rlpy.datasets.get_dataset('pendulum')

# d4rl-atari dataset
dataset, env = d3rlpy.datasets.get_dataset('breakout-mixed-v0')

# d4rl dataset
dataset, env = d3rlpy.datasets.get_dataset('hopper-medium-v0')
```

Parameters

- **env_name** (*str*) – environment id of the dataset.
- **transition_picker** (*Optional*[*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*]) – TransitionPickerProtocol object.
- **trajectory_slicer** (*Optional*[*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*]) – TrajectorySlicerProtocol object.
- **render_mode** (*Optional*[*str*]) – Mode of rendering (human, rgb_array).

Returns tuple of *d3rlpy.dataset.ReplayBuffer* and gym environment.

Return type *Tuple*[*d3rlpy.dataset.replay_buffer.ReplayBuffer*, *gym.core.Env*[*Any*, *Any*]]

4.4.7 d3rlpy.datasets.get_minari

d3rlpy.datasets.get_minari(*env_name*, *transition_picker=None*, *trajectory_slicer=None*,
render_mode=None, *tuple_observation=False*)

Returns minari dataset and environment.

The dataset is provided through minari.

Parameters

- **env_name** (*str*) – environment id of minari dataset.
- **transition_picker** (*Optional*[*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*]) – TransitionPickerProtocol object.
- **trajectory_slicer** (*Optional*[*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*]) – TrajectorySlicerProtocol object.
- **render_mode** (*Optional*[*str*]) – Mode of rendering (human, rgb_array).
- **tuple_observation** (*bool*) – Flag to include goals as tuple element.

Returns tuple of *d3rlpy.dataset.ReplayBuffer* and gym environment.

Return type *Tuple*[*d3rlpy.dataset.replay_buffer.ReplayBuffer*, *gymnasium.core.Env*[*Any*, *Any*]]

4.5 Preprocessing

4.5.1 Observation

d3rlpy provides several preprocessors tightly incorporated with algorithms. Each preprocessor is implemented with PyTorch operation, which will be included in the model exported by *save_policy* method.

```
from d3rlpy.datasets import get_pendulum
from d3rlpy.algos import CQLConfig
from d3rlpy.preprocessing import StandardObservationScaler

dataset, _ = get_pendulum()

# choose from ['pixel', 'min_max', 'standard'] or None
cql = CQLConfig(observation_scaler=StandardObservationScaler()).create()

# observation scaler is fitted from the given dataset
```

(continues on next page)

(continued from previous page)

```

cql.fit(dataset, n_steps=1000000)

# preprocessing is included in TorchScript
cql.save_policy('policy.pt')

# you don't need to take care of preprocessing at production
policy = torch.jit.load('policy.pt')
action = policy(unpreprocessed_x)

```

You can also initialize observation scalers by yourself.

```

from d3rlpy.preprocessing import StandardObservationScaler

observation_scaler = StandardObservationScaler(mean=..., std=...)

cql = CQLConfig(observation_scaler=observation_scaler).create()

```

<code>d3rlpy.preprocessing. PixelObservationScaler</code>	Pixel normalization preprocessing.
<code>d3rlpy.preprocessing. MinMaxObservationScaler</code>	Min-Max normalization preprocessing.
<code>d3rlpy.preprocessing. StandardObservationScaler</code>	Standardization preprocessing.

d3rlpy.preprocessing.PixelObservationScaler

class d3rlpy.preprocessing.PixelObservationScaler
Pixel normalization preprocessing.

$$x' = x/255$$

```

from d3rlpy.preprocessing import PixelObservationScaler
from d3rlpy.algos import CQLConfig

cql = CQLConfig(observation_scaler=PixelObservationScaler()).create()

```

Methods

Return type None

classmethod deserialize(serialized_config)

Parameters serialized_config (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(dict_config)

Parameters dict_config (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters `path (str)` –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(env)

Gets scaling parameters from environment.

Parameters `env` (`Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]`) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(epochs, trajectory_slicer)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (`Sequence[d3rlpy.dataset.components.EpisodeBase]`) – List of episodes.
- **trajectory_slicer** (`d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol`) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(epochs, transition_picker)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (`Sequence[d3rlpy.dataset.components.EpisodeBase]`) – List of episodes.
- **transition_picker** (`d3rlpy.dataset.transition_picker.TransitionPickerProtocol`) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs` (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(x)

Returns reversely transformed output.

Parameters `x` (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type torch.Tensor

reverse_transform_numpy(*x*)

Returns reversely transformed output in numpy.

Parameters **x** (*numpy.ndarray*[Any, *numpy.dtype*[Any]]) – Input.

Returns Inversely transformed output.

Return type *numpy.ndarray*[Any, *numpy.dtype*[Any]]

classmethod **schema**(**, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None*)

Parameters

- **infer_missing** (*bool*) –
- **many** (*bool*) –
- **partial** (*bool*) –

Return type *dataclasses_json.mm.SchemaF*[*dataclasses_json.api.A*]

serialize()

Return type *str*

serialize_to_dict()

Return type *Dict*[*str*, Any]

to_dict(*encode_json=False*)

Return type *Dict*[*str*, *Optional*[*Union*[*dict*, *list*, *str*, *int*, *float*, *bool*]]]

to_json(**, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw*)

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional*[*Union*[*int*, *str*]]) –
- **separators** (*Optional*[*Tuple*[*str*, *str*]]) –
- **default** (*Optional*[*Callable*]) –
- **sort_keys** (*bool*) –

Return type *str*

transform(*x*)

Returns processed output.

Parameters $\mathbf{x}$ (*torch.Tensor*) – Input.

Returns Processed output.

Return type *torch.Tensor*

transform_numpy(*x*)

Returns processed output in numpy.

Parameters $\mathbf{x}$ (*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]) – Input.

Returns Processed output.

Return type *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]

Attributes

built

d3rlpy.preprocessing.MinMaxObservationScaler

class d3rlpy.preprocessing.MinMaxObservationScaler(*minimum=None, maximum=None*)
Min-Max normalization preprocessing.

Observations will be normalized in range [-1.0, 1.0].

$$x' = (x - \min x) / (\max x - \min x) * 2 - 1$$

```
from d3rlpy.preprocessing import MinMaxObservationScaler
from d3rlpy.algos import CQLConfig

# normalize based on datasets or environments
cql = CQLConfig(observation_scaler=MinMaxObservationScaler()).create()

# manually initialize
minimum = observations.min(axis=0)
maximum = observations.max(axis=0)
observation_scaler = MinMaxObservationScaler(
    minimum=minimum,
    maximum=maximum,
)
cql = CQLConfig(observation_scaler=observation_scaler).create()
```

Parameters

- **minimum** (*numpy.ndarray*) – Minimum values at each entry.
- **maximum** (*numpy.ndarray*) – Maximum values at each entry.

Return type *None*

Methods

classmethod `deserialize(serialized_config)`

Parameters **serialized_config** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict(dict_config)`

Parameters **dict_config** (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters **path** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(env)

Gets scaling parameters from environment.

Parameters **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(epochs, trajectory_slicer)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(epochs, transition_picker)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters **kvs** (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(`x`)

Returns reversely transformed output.

Parameters `x` (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type `torch.Tensor`

reverse_transform_numpy(`x`)

Returns reversely transformed output in numpy.

Parameters `x` (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Input.

Returns Inversely transformed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json(`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- **skipkeys** (`bool`) –

- `ensure_ascii` (*bool*) –
- `check_circular` (*bool*) –
- `allow_nan` (*bool*) –
- `indent` (*Optional[Union[int, str]]*) –
- `separators` (*Optional[Tuple[str, str]]*) –
- `default` (*Optional[Callable]*) –
- `sort_keys` (*bool*) –

Return type `str`

transform(*x*)

Returns processed output.

Parameters *x* (*torch.Tensor*) – Input.

Returns Processed output.

Return type *torch.Tensor*

transform_numpy(*x*)

Returns processed output in numpy.

Parameters *x* (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.

Returns Processed output.

Return type *numpy.ndarray[Any, numpy.dtype[Any]]*

Attributes

built

maximum: *Optional[numpy.ndarray[Any, numpy.dtype[Any]]] = None*

minimum: *Optional[numpy.ndarray[Any, numpy.dtype[Any]]] = None*

d3rlpy.preprocessing.StandardObservationScaler

class *d3rlpy.preprocessing.StandardObservationScaler*(*mean=None, std=None, eps=0.001*)

Standardization preprocessing.

$$x' = (x - \mu) / \sigma$$

```
from d3rlpy.preprocessing import StandardObservationScaler
from d3rlpy.algos import CQLConfig

# normalize based on datasets
cql = CQLConfig(observation_scaler=StandardObservationScaler()).create()

# manually initialize
mean = observations.mean(axis=0)
std = observations.std(axis=0)
observation_scaler = StandardObservationScaler(mean=mean, std=std)
cql = CQLConfig(observation_scaler=observation_scaler).create()
```

Parameters

- **mean** (*numpy.ndarray*) – Mean values at each entry.
- **std** (*numpy.ndarray*) – Standard deviation at each entry.
- **eps** (*float*) – Small constant value to avoid zero-division.

Return type *None*

Methods

classmethod deserialize(*serialized_config*)

Parameters *serialized_config* (*str*) –

Return type *d3rlpy.serializable_config.TConfig*

classmethod deserialize_from_dict(*dict_config*)

Parameters *dict_config* (*Dict[str, Any]*) –

Return type *d3rlpy.serializable_config.TConfig*

classmethod deserialize_from_file(*path*)

Parameters *path* (*str*) –

Return type *d3rlpy.serializable_config.TConfig*

fit_with_env(*env*)

Gets scaling parameters from environment.

Parameters *env* (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym environment.

Return type *None*

fit_with_trajectory_slicer(*episodes, trajectory_slicer*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type *None*

fit_with_transition_picker(*episodes, transition_picker*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type *None*

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs` (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(`x`)

Returns reversely transformed output.

Parameters `x` (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type `torch.Tensor`

reverse_transform_numpy(`x`)

Returns reversely transformed output in numpy.

Parameters `x` (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Input.

Returns Inversely transformed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

```
to_json(*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None,
        separators=None, default=None, sort_keys=False, **kw)
```

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional[Union[int, str]]*) –
- **separators** (*Optional[Tuple[str, str]]*) –
- **default** (*Optional[Callable]*) –
- **sort_keys** (*bool*) –

Return type *str***transform**(*x*)

Returns processed output.

Parameters *x* (*torch.Tensor*) – Input.**Returns** Processed output.**Return type** *torch.Tensor***transform_numpy**(*x*)

Returns processed output in numpy.

Parameters *x* (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.**Returns** Processed output.**Return type** *numpy.ndarray[Any, numpy.dtype[Any]]***Attributes****built****eps:** *float* = 0.001**mean:** *Optional[numpy.ndarray[Any, numpy.dtype[Any]]]* = None**std:** *Optional[numpy.ndarray[Any, numpy.dtype[Any]]]* = None

4.5.2 Action

d3rlpy also provides the feature that preprocesses continuous action. With this preprocessing, you don't need to normalize actions in advance or implement normalization in the environment side.

```
from d3rlpy.datasets import get_pendulum
from d3rlpy.algos import CQLConfig
from d3rlpy.preprocessing import MinMaxActionScaler

dataset, _ = get_pendulum()
```

(continues on next page)

(continued from previous page)

```

cql = CQLConfig(action_scaler=MinMaxActionScaler()).create()

# action scaler is fitted from the given episodes
cql.fit(dataset, n_steps=1000000)

# postprocessing is included in TorchScript
cql.save_policy('policy.pt')

# you don't need to take care of postprocessing at production
policy = torch.jit.load('policy.pt')
action = policy(x)

```

You can also initialize scalers by yourself.

```

from d3rlpy.preprocessing import MinMaxActionScaler

action_scaler = MinMaxActionScaler(minimum=..., maximum=...)

cql = CQLConfig(action_scaler=action_scaler).create()

```

[`d3rlpy.preprocessing.MinMaxActionScaler`](#)

Min-Max normalization action preprocessing.

`d3rlpy.preprocessing.MinMaxActionScaler`

class `d3rlpy.preprocessing.MinMaxActionScaler`(*minimum=None, maximum=None*)

Min-Max normalization action preprocessing.

Actions will be normalized in range `[-1.0, 1.0]`.

$$a' = (a - \min a) / (\max a - \min a) * 2 - 1$$

```

from d3rlpy.preprocessing import MinMaxActionScaler
from d3rlpy.algos import CQLConfig

# normalize based on datasets or environments
cql = CQLConfig(action_scaler=MinMaxActionScaler()).create()

# manually initialize
minimum = actions.min(axis=0)
maximum = actions.max(axis=0)
action_scaler = MinMaxActionScaler(minimum=minimum, maximum=maximum)
cql = CQLConfig(action_scaler=action_scaler).create()

```

Parameters

- **minimum** (*numpy.ndarray*) – Minimum values at each entry.
- **maximum** (*numpy.ndarray*) – Maximum values at each entry.

Return type `None`

Methods

classmethod `deserialize(serialized_config)`

Parameters **serialized_config** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict(dict_config)`

Parameters **dict_config** (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters **path** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(env)

Gets scaling parameters from environment.

Parameters **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(episodes, trajectory_slicer)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(episodes, transition_picker)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters **kvs** (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(`x`)

Returns reversely transformed output.

Parameters `x` (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type `torch.Tensor`

reverse_transform_numpy(`x`)

Returns reversely transformed output in numpy.

Parameters `x` (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Input.

Returns Inversely transformed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json(`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- **skipkeys** (`bool`) –

- `ensure_ascii` (*bool*) –
- `check_circular` (*bool*) –
- `allow_nan` (*bool*) –
- `indent` (*Optional[Union[int, str]]*) –
- `separators` (*Optional[Tuple[str, str]]*) –
- `default` (*Optional[Callable]*) –
- `sort_keys` (*bool*) –

Return type `str`

transform(*x*)

Returns processed output.

Parameters *x* (*torch.Tensor*) – Input.

Returns Processed output.

Return type *torch.Tensor*

transform_numpy(*x*)

Returns processed output in numpy.

Parameters *x* (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.

Returns Processed output.

Return type *numpy.ndarray[Any, numpy.dtype[Any]]*

Attributes

built

maximum: *Optional[numpy.ndarray[Any, numpy.dtype[Any]]] = None*

minimum: *Optional[numpy.ndarray[Any, numpy.dtype[Any]]] = None*

4.5.3 Reward

d3rlpy also provides the feature that preprocesses rewards. With this preprocessing, you don't need to normalize rewards in advance. Note that this preprocessor should be fitted with the dataset. Afterwards you can use it with online training.

```
from d3rlpy.datasets import get_pendulum
from d3rlpy.algos import CQLConfig
from d3rlpy.preprocessing import StandardRewardScaler

dataset, _ = get_pendulum()

cql = CQLConfig(reward_scaler=StandardRewardScaler()).create()

# reward scaler is fitted from the given episodes
cql.fit(dataset)

# reward scaler is also available at finetuning.
cql.fit_online(env)
```

You can also initialize scalers by yourself.

```
from d3rlpy.preprocessing import MinMaxRewardScaler

reward_scaler = MinMaxRewardScaler(minimum=..., maximum=...)

cql = CQLConfig(reward_scaler=reward_scaler).create()
```

<code>d3rlpy.preprocessing.MinMaxRewardScaler</code>	Min-Max reward normalization preprocessing.
<code>d3rlpy.preprocessing.StandardRewardScaler</code>	Reward standardization preprocessing.
<code>d3rlpy.preprocessing.ClipRewardScaler</code>	Reward clipping preprocessing.
<code>d3rlpy.preprocessing.MultiplyRewardScaler</code>	Multiplication reward preprocessing.
<code>d3rlpy.preprocessing.ReturnBasedRewardScaler</code>	Reward normalization preprocessing based on return scale.
<code>d3rlpy.preprocessing.ConstantShiftRewardScaler</code>	Reward shift preprocessing.

`d3rlpy.preprocessing.MinMaxRewardScaler`

class `d3rlpy.preprocessing.MinMaxRewardScaler`(*minimum=None, maximum=None, multiplier=1.0*)
Min-Max reward normalization preprocessing.

Rewards will be normalized in range `[0.0, 1.0]`.

$$r' = (r - \min(r)) / (\max(r) - \min(r))$$

```
from d3rlpy.preprocessing import MinMaxRewardScaler
from d3rlpy.algos import CQLConfig

# normalize based on datasets
cql = CQLConfig(reward_scaler=MinMaxRewardScaler()).create()

# initialize manually
reward_scaler = MinMaxRewardScaler(minimum=0.0, maximum=10.0)
cql = CQLConfig(reward_scaler=reward_scaler).create()
```

Parameters

- **minimum** (*float*) – Minimum value.
- **maximum** (*float*) – Maximum value.
- **multiplier** (*float*) – Constant multiplication value.

Return type `None`

Methods

classmethod `deserialize(serialized_config)`

Parameters **serialized_config** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict(dict_config)`

Parameters **dict_config** (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters **path** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(env)

Gets scaling parameters from environment.

Parameters **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(epochs, trajectory_slicer)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(epochs, transition_picker)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_pickers.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters **kvs** (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(`x`)

Returns reversely transformed output.

Parameters `x` (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type `torch.Tensor`

reverse_transform_numpy(`x`)

Returns reversely transformed output in numpy.

Parameters `x` (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Input.

Returns Inversely transformed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json(`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- **skipkeys** (`bool`) –

- `ensure_ascii` (*bool*) –
- `check_circular` (*bool*) –
- `allow_nan` (*bool*) –
- `indent` (*Optional[Union[int, str]]*) –
- `separators` (*Optional[Tuple[str, str]]*) –
- `default` (*Optional[Callable]*) –
- `sort_keys` (*bool*) –

Return type `str`

transform(*x*)

Returns processed output.

Parameters *x* (*torch.Tensor*) – Input.

Returns Processed output.

Return type *torch.Tensor*

transform_numpy(*x*)

Returns processed output in numpy.

Parameters *x* (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.

Returns Processed output.

Return type *numpy.ndarray[Any, numpy.dtype[Any]]*

Attributes

built

maximum: *Optional[float]* = *None*

minimum: *Optional[float]* = *None*

multiplier: *float* = *1.0*

d3rlpy.preprocessing.StandardRewardScaler

class *d3rlpy.preprocessing.StandardRewardScaler*(*mean=None, std=None, eps=0.001, multiplier=1.0*)

Reward standardization preprocessing.

$$r' = (r - \mu) / \sigma$$

```
from d3rlpy.preprocessing import StandardRewardScaler
from d3rlpy.algos import CQLConfig

# normalize based on datasets
cql = CQLConfig(reward_scaler=StandardRewardScaler()).create()

# initialize manually
reward_scaler = StandardRewardScaler(mean=0.0, std=1.0)
cql = CQLConfig(reward_scaler=reward_scaler).create()
```

Parameters

- **mean** (*float*) – Mean value.
- **std** (*float*) – Standard deviation value.
- **eps** (*float*) – Constant value to avoid zero-division.
- **multiplier** (*float*) – Constant multiplication value

Return type `None`

Methods

classmethod `deserialize(serialized_config)`

Parameters `serialized_config` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict(dict_config)`

Parameters `dict_config` (*Dict*[*str*, *Any*]) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters `path` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env (*env*)

Gets scaling parameters from environment.

Parameters `env` (*Union*[*gym.core.Env*[*Any*, *Any*], *gymnasium.core.Env*[*Any*, *Any*]]) – Gym environment.

Return type `None`

fit_with_trajectory_slicer (*episodes*, *trajectory_slicer*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence*[*d3rlpy.dataset.components.EpisodeBase*]) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker (*episodes*, *transition_picker*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence*[*d3rlpy.dataset.components.EpisodeBase*]) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_picker.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters **kvs** (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters **s** (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(*x*)

Returns reversely transformed output.

Parameters **x** (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type `torch.Tensor`

reverse_transform_numpy(*x*)

Returns reversely transformed output in numpy.

Parameters **x** (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Input.

Returns Inversely transformed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(*encode_json=False*)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

`to_json(*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw)`

Parameters

- `skipkeys` (*bool*) –
- `ensure_ascii` (*bool*) –
- `check_circular` (*bool*) –
- `allow_nan` (*bool*) –
- `indent` (*Optional[Union[int, str]]*) –
- `separators` (*Optional[Tuple[str, str]]*) –
- `default` (*Optional[Callable]*) –
- `sort_keys` (*bool*) –

Return type *str*

transform(*x*)

Returns processed output.

Parameters *x* (*torch.Tensor*) – Input.

Returns Processed output.

Return type *torch.Tensor*

transform_numpy(*x*)

Returns processed output in numpy.

Parameters *x* (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.

Returns Processed output.

Return type *numpy.ndarray[Any, numpy.dtype[Any]]*

Attributes

built

eps: *float* = 0.001

mean: *Optional[float]* = None

multiplier: *float* = 1.0

std: *Optional[float]* = None

d3rlpy.preprocessing.ClipRewardScaler

class d3rlpy.preprocessing.ClipRewardScaler(*low=None, high=None, multiplier=1.0*)
Reward clipping preprocessing.

```
from d3rlpy.preprocessing import ClipRewardScaler
from d3rlpy.algos import CQLConfig

# clip rewards within [-1.0, 1.0]
reward_scaler = ClipRewardScaler(low=-1.0, high=1.0)
cql = CQLConfig(reward_scaler=reward_scaler).create()
```

Parameters

- **low** (*Optional[float]*) – Minimum value to clip.
- **high** (*Optional[float]*) – Maximum value to clip.
- **multiplier** (*float*) – Constant multiplication value.

Return type `None`

Methods

classmethod `deserialize(serialized_config)`

Parameters `serialized_config` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict(dict_config)`

Parameters `dict_config` (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters `path` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(*env*)

Gets scaling parameters from environment.

Parameters `env` (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(*episodes, trajectory_slicer*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.

- **trajectory_slicer** (`d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol`) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(*episodes, transition_picker*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (`Sequence[d3rlpy.dataset.components.EpisodeBase]`) – List of episodes.
- **transition_picker** (`d3rlpy.dataset.transition_pickers.TransitionPickerProtocol`) – Transition picker to process mini-batch.

Return type `None`

classmethod from_dict(*kvs, *, infer_missing=False*)

Parameters *kvs* (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod from_json(*s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw*)

Parameters *s* (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static get_type()

Return type `str`

reverse_transform(*x*)

Returns reversely transformed output.

Parameters *x* (`torch.Tensor`) – input.

Returns Inversely transformed output.

Return type `torch.Tensor`

reverse_transform_numpy(*x*)

Returns reversely transformed output in numpy.

Parameters *x* (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Input.

Returns Inversely transformed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

classmethod schema(**, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None*)

Parameters

- **infer_missing** (`bool`) –
- **many** (`bool`) –
- **partial** (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict (*encode_json=False*)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json (*, *skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw*)

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional[Union[int, str]]*) –
- **separators** (*Optional[Tuple[str, str]]*) –
- **default** (*Optional[Callable]*) –
- **sort_keys** (*bool*) –

Return type `str`

transform(*x*)

Returns processed output.

Parameters **x** (*torch.Tensor*) – Input.

Returns Processed output.

Return type `torch.Tensor`

transform_numpy(*x*)

Returns processed output in numpy.

Parameters **x** (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.

Returns Processed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

Attributes

built

high: Optional[float] = None

low: Optional[float] = None

multiplier: float = 1.0

d3rlpy.preprocessing.MultiplyRewardScaler

class d3rlpy.preprocessing.MultiplyRewardScaler(*multiplier=1.0*)

Multiplication reward preprocessing.

This preprocessor multiplies rewards by a constant number.

```
from d3rlpy.preprocessing import MultiplyRewardScaler
from d3rlpy.algos import CQLConfig

# multiply rewards by 10
reward_scaler = MultiplyRewardScaler(10.0)
cql = CQLConfig(reward_scaler=reward_scaler).create()
```

Parameters *multiplier* (float) – Constant multiplication value.

Return type None

Methods

classmethod deserialize(*serialized_config*)

Parameters *serialized_config* (str) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters *dict_config* (Dict[str, Any]) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_file(*path*)

Parameters *path* (str) –

Return type d3rlpy.serializable_config.TConfig

fit_with_env(*env*)

Gets scaling parameters from environment.

Parameters *env* (Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]) – Gym environment.

Return type None

fit_with_trajectory_slicer(*episodes, trajectory_slicer*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type *None***fit_with_transition_picker**(*episodes, transition_picker*)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_picker.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type *None***classmethod from_dict**(*kvs, *, infer_missing=False*)**Parameters** *kvs* (*Optional[Union[dict, list, str, int, float, bool]]*) –**Return type** *dataclasses_json.api.A***classmethod from_json**(*s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw*)**Parameters** *s* (*Union[str, bytes, bytearray]*) –**Return type** *dataclasses_json.api.A***static get_type**()**Return type** *str***reverse_transform**(*x*)

Returns reversely transformed output.

Parameters *x* (*torch.Tensor*) – input.**Returns** Inversely transformed output.**Return type** *torch.Tensor***reverse_transform_numpy**(*x*)

Returns reversely transformed output in numpy.

Parameters *x* (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.**Returns** Inversely transformed output.**Return type** *numpy.ndarray[Any, numpy.dtype[Any]]***classmethod schema**(**, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None*)**Parameters**

- **infer_missing** (*bool*) –

- **many** (*bool*) –

- **partial** (*bool*) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict (*encode_json=False*)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json (*, *skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw*)

Parameters

- **skipkeys** (*bool*) –

- **ensure_ascii** (*bool*) –

- **check_circular** (*bool*) –

- **allow_nan** (*bool*) –

- **indent** (*Optional[Union[int, str]]*) –

- **separators** (*Optional[Tuple[str, str]]*) –

- **default** (*Optional[Callable]*) –

- **sort_keys** (*bool*) –

Return type `str`

transform(*x*)

Returns processed output.

Parameters **x** (*torch.Tensor*) – Input.

Returns Processed output.

Return type `torch.Tensor`

transform_numpy(*x*)

Returns processed output in numpy.

Parameters **x** (*numpy.ndarray[Any, numpy.dtype[Any]]*) – Input.

Returns Processed output.

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

Attributes

built

multiplier: `float = 1.0`

`d3rlpy.preprocessing.ReturnBasedRewardScaler`

class `d3rlpy.preprocessing.ReturnBasedRewardScaler`(*return_max=None, return_min=None, multiplier=1.0*)

Reward normalization preprocessing based on return scale.

$$r' = r / (R_{max} - R_{min})$$

```
from d3rlpy.preprocessing import ReturnBasedRewardScaler
from d3rlpy.algos import CQLConfig

# normalize based on datasets
cql = CQLConfig(reward_scaler=ReturnBasedRewardScaler()).create()

# initialize manually
reward_scaler = ReturnBasedRewardScaler(
    return_max=100.0,
    return_min=1.0,
)
cql = CQLConfig(reward_scaler=reward_scaler).create()
```

References

- Kostrikov et al., Offline Reinforcement Learning with Implicit Q-Learning.

Parameters

- **return_max** (*float*) – Maximum return value.
- **return_min** (*float*) – Standard deviation value.
- **multiplier** (*float*) – Constant multiplication value

Return type `None`

Methods

classmethod `deserialize`(*serialized_config*)

Parameters `serialized_config` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict`(*dict_config*)

Parameters `dict_config` (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters `path` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(env)

Gets scaling parameters from environment.

Parameters `env` (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(epochs, trajectory_slicer)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **trajectory_slicer** (*d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol*) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(epochs, transition_picker)

Estimates scaling parameters from dataset.

Parameters

- **epochs** (*Sequence[d3rlpy.dataset.components.EpisodeBase]*) – List of episodes.
- **transition_picker** (*d3rlpy.dataset.transition_picker.TransitionPickerProtocol*) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs` (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (*Union[str, bytes, bytearray]*) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

reverse_transform(x)

Returns reversely transformed output.

Parameters `x` (*torch.Tensor*) – input.

Returns Inversely transformed output.

Return type torch.Tensor

reverse_transform_numpy(x)

Returns reversely transformed output in numpy.

Parameters **x** (*numpy.ndarray*[Any, *numpy.dtype*[Any]]) – Input.

Returns Inversely transformed output.

Return type *numpy.ndarray*[Any, *numpy.dtype*[Any]]

classmethod **schema**(*, *infer_missing=False*, *only=None*, *exclude=()*, *many=False*, *context=None*, *load_only=()*, *dump_only=()*, *partial=False*, *unknown=None*)

Parameters

- **infer_missing** (*bool*) –
- **many** (*bool*) –
- **partial** (*bool*) –

Return type *dataclasses_json.mm.SchemaF*[*dataclasses_json.api.A*]

serialize()

Return type *str*

serialize_to_dict()

Return type *Dict*[*str*, Any]

to_dict(*encode_json=False*)

Return type *Dict*[*str*, *Optional*[*Union*[*dict*, *list*, *str*, *int*, *float*, *bool*]]]

to_json(*, *skipkeys=False*, *ensure_ascii=True*, *check_circular=True*, *allow_nan=True*, *indent=None*, *separators=None*, *default=None*, *sort_keys=False*, **kw)

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional*[*Union*[*int*, *str*]]) –
- **separators** (*Optional*[*Tuple*[*str*, *str*]]) –
- **default** (*Optional*[*Callable*]) –
- **sort_keys** (*bool*) –

Return type *str*

transform(x)

Returns processed output.

Parameters **x** (*torch.Tensor*) – Input.

Returns Processed output.

Return type torch.Tensor

transform_numpy(*x*)

Returns processed output in numpy.

Parameters *x* (`numpy.ndarray`[*Any*, `numpy.dtype`[*Any*]]) – Input.

Returns Processed output.

Return type `numpy.ndarray`[*Any*, `numpy.dtype`[*Any*]]

Attributes

built

multiplier: `float` = 1.0

return_max: `Optional`[`float`] = None

return_min: `Optional`[`float`] = None

d3rlpy.preprocessing.ConstantShiftRewardScaler

class d3rlpy.preprocessing.ConstantShiftRewardScaler(*shift*)

Reward shift preprocessing.

$$r' = r + c$$

You need to initialize manually.

```
from d3rlpy.preprocessing import ConstantShiftRewardScaler
from d3rlpy.algos import CQLConfig

reward_scaler = ConstantShiftRewardScaler(shift=-1.0)
cql = CQLConfig(reward_scaler=reward_scaler).create()
```

References

- Kostrikov et al., Offline Reinforcement Learning with Implicit Q-Learning.

Parameters *shift* (`float`) – Constant shift value

Return type None

Methods

classmethod deserialize(*serialized_config*)

Parameters *serialized_config* (`str`) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters `dict_config` (`Dict[str, Any]`) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file`(`path`)

Parameters `path` (`str`) –

Return type `d3rlpy.serializable_config.TConfig`

fit_with_env(`env`)

Gets scaling parameters from environment.

Parameters `env` (`Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]`) – Gym environment.

Return type `None`

fit_with_trajectory_slicer(`episodes`, `trajectory_slicer`)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (`Sequence[d3rlpy.dataset.components.EpisodeBase]`) – List of episodes.
- **trajectory_slicer** (`d3rlpy.dataset.trajectory_slicers.TrajectorySlicerProtocol`) – Trajectory slicer to process mini-batch.

Return type `None`

fit_with_transition_picker(`episodes`, `transition_picker`)

Estimates scaling parameters from dataset.

Parameters

- **episodes** (`Sequence[d3rlpy.dataset.components.EpisodeBase]`) – List of episodes.
- **transition_picker** (`d3rlpy.dataset.transition_picker.TransitionPickerProtocol`) – Transition picker to process mini-batch.

Return type `None`

classmethod `from_dict`(`kvs`, *, `infer_missing=False`)

Parameters `kvs` (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod `from_json`(`s`, *, `parse_float=None`, `parse_int=None`, `parse_constant=None`, `infer_missing=False`, **`kw`)

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type`()

Return type `str`

reverse_transform(`x`)

Returns reversely transformed output.

Parameters **x** (*torch.Tensor*) – input.

Returns Inversely transformed output.

Return type *torch.Tensor*

reverse_transform_numpy(*x*)

Returns reversely transformed output in numpy.

Parameters **x** (*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]) – Input.

Returns Inversely transformed output.

Return type *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]

classmethod **schema**(**, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None*)

Parameters

- **infer_missing** (*bool*) –
- **many** (*bool*) –
- **partial** (*bool*) –

Return type *dataclasses_json.mm.SchemaF*[*dataclasses_json.api.A*]

serialize()

Return type *str*

serialize_to_dict()

Return type *Dict*[*str*, *Any*]

to_dict(*encode_json=False*)

Return type *Dict*[*str*, *Optional*[*Union*[*dict*, *list*, *str*, *int*, *float*, *bool*]]]

to_json(**, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw*)

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional*[*Union*[*int*, *str*]]) –
- **separators** (*Optional*[*Tuple*[*str*, *str*]]) –
- **default** (*Optional*[*Callable*]) –
- **sort_keys** (*bool*) –

Return type *str*

transform(*x*)

Returns processed output.

Parameters *x* (*torch.Tensor*) – Input.

Returns Processed output.

Return type *torch.Tensor*

transform_numpy(*x*)

Returns processed output in numpy.

Parameters *x* (*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]) – Input.

Returns Processed output.

Return type *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]

Attributes

built

4.6 Optimizers

d3rlpy provides `OptimizerFactory` that gives you flexible control over optimizers. `OptimizerFactory` takes PyTorch's optimizer class and its arguments to initialize, which you can check more [here](#).

```
import d3rlpy
from torch.optim import Adam

# modify weight decay
optim_factory = d3rlpy.models.OptimizerFactory(Adam, weight_decay=1e-4)

# set OptimizerFactory
dqn = d3rlpy.algos.DQNConfig(optim_factory=optim_factory).create()
```

There are also convenient aliases.

```
# alias for Adam optimizer
optim_factory = d3rlpy.models.AdamFactory(weight_decay=1e-4)

dqn = d3rlpy.algos.DQNConfig(optim_factory=optim_factory).create()
```

<code>d3rlpy.models.OptimizerFactory</code>	A factory class that creates an optimizer object in a lazy way.
<code>d3rlpy.models.SGDFactory</code>	An alias for SGD optimizer.
<code>d3rlpy.models.AdamFactory</code>	An alias for Adam optimizer.
<code>d3rlpy.models.RMSpropFactory</code>	An alias for RMSprop optimizer.
<code>d3rlpy.models.GPTAdamWFactory</code>	AdamW optimizer for Decision Transformer architectures.

4.6.1 d3rlpy.models.OptimizerFactory

class d3rlpy.models.OptimizerFactory

A factory class that creates an optimizer object in a lazy way.

The optimizers in algorithms can be configured through this factory class.

Methods

Return type `None`

create(*named_modules*, *lr*)

Returns an optimizer object.

Parameters

- **named_modules** (*list*) – List of tuples of module names and modules.
- **lr** (*float*) – Learning rate.

Returns an optimizer object.

Return type `torch.optim.Optimizer`

classmethod **deserialize**(*serialized_config*)

Parameters **serialized_config** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod **deserialize_from_dict**(*dict_config*)

Parameters **dict_config** (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod **deserialize_from_file**(*path*)

Parameters **path** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod **from_dict**(*kvs*, *, *infer_missing=False*)

Parameters **kvs** (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod **from_json**(*s*, *, *parse_float=None*, *parse_int=None*, *parse_constant=None*, *infer_missing=False*, ***kw*)

Parameters **s** (*Union[str, bytes, bytearray]*) –

Return type `dataclasses_json.api.A`

static **get_type**()

Return type `str`

```
classmethod schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None,
                   load_only=(), dump_only=(), partial=False, unknown=None)
```

Parameters

- **infer_missing** (*bool*) –
- **many** (*bool*) –
- **partial** (*bool*) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

```
serialize()
```

Return type *str*

```
serialize_to_dict()
```

Return type `Dict[str, Any]`

```
to_dict(encode_json=False)
```

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

```
to_json(*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None,
        separators=None, default=None, sort_keys=False, **kw)
```

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional[Union[int, str]]*) –
- **separators** (*Optional[Tuple[str, str]]*) –
- **default** (*Optional[Callable]*) –
- **sort_keys** (*bool*) –

Return type *str*

4.6.2 d3rlpy.models.SGDFactory

```
class d3rlpy.models.SGDFactory(momentum=0.0, dampening=0.0, weight_decay=0.0, nesterov=False)
    An alias for SGD optimizer.
```

```
from d3rlpy.optimizers import SGDFactory

factory = SGDFactory(weight_decay=1e-4)
```

Parameters

- **momentum** (*float*) – momentum factor.
- **dampening** (*float*) – dampening for momentum.
- **weight_decay** (*float*) – weight decay (L2 penalty).
- **nesterov** (*bool*) – flag to enable Nesterov momentum.

Return type *None*

Methods

create(*named_modules, lr*)

Returns an optimizer object.

Parameters

- **named_modules** (*list*) – List of tuples of module names and modules.
- **lr** (*float*) – Learning rate.

Returns an optimizer object.

Return type `torch.optim.Optimizer`

classmethod deserialize(*serialized_config*)

Parameters **serialized_config** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod deserialize_from_dict(*dict_config*)

Parameters **dict_config** (`Dict[str, Any]`) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod deserialize_from_file(*path*)

Parameters **path** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod from_dict(*kvs, *, infer_missing=False*)

Parameters **kvs** (`Optional[Union[dict, list, str, int, float, bool]]`) –

Return type `dataclasses_json.api.A`

classmethod from_json(*s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw*)

Parameters **s** (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static get_type()

Return type *str*

```
classmethod schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None,
                   load_only=(), dump_only=(), partial=False, unknown=None)
```

Parameters

- **infer_missing** (*bool*) –
- **many** (*bool*) –
- **partial** (*bool*) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

```
serialize()
```

Return type *str*

```
serialize_to_dict()
```

Return type `Dict[str, Any]`

```
to_dict(encode_json=False)
```

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

```
to_json(*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None,
        separators=None, default=None, sort_keys=False, **kw)
```

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (*Optional[Union[int, str]]*) –
- **separators** (*Optional[Tuple[str, str]]*) –
- **default** (*Optional[Callable]*) –
- **sort_keys** (*bool*) –

Return type *str*

Attributes

dampening: *float* = 0.0

momentum: *float* = 0.0

nesterov: *bool* = False

weight_decay: *float* = 0.0

4.6.3 d3rlpy.models.AdamFactory

class d3rlpy.models.**AdamFactory**(*betas*=(0.9, 0.999), *eps*=1e-08, *weight_decay*=0, *amsgrad*=False)
 An alias for Adam optimizer.

```
from d3rlpy.optimizers import AdamFactory

factory = AdamFactory(weight_decay=1e-4)
```

Parameters

- **betas** (*Tuple*[*float*, *float*]) – coefficients used for computing running averages of gradient and its square.
- **eps** (*float*) – term added to the denominator to improve numerical stability.
- **weight_decay** (*float*) – weight decay (L2 penalty).
- **amsgrad** (*bool*) – flag to use the AMSGrad variant of this algorithm.

Return type *None*

Methods

create(*named_modules*, *lr*)

Returns an optimizer object.

Parameters

- **named_modules** (*list*) – List of tuples of module names and modules.
- **lr** (*float*) – Learning rate.

Returns an optimizer object.

Return type torch.optim.Optimizer

classmethod **deserialize**(*serialized_config*)

Parameters *serialized_config* (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod **deserialize_from_dict**(*dict_config*)

Parameters *dict_config* (*Dict*[*str*, *Any*]) –

Return type d3rlpy.serializable_config.TConfig

classmethod **deserialize_from_file**(*path*)

Parameters *path* (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod **from_dict**(*kvs*, *, *infer_missing*=False)

Parameters *kvs* (*Optional*[*Union*[*dict*, *list*, *str*, *int*, *float*, *bool*]]) –

Return type dataclasses_json.api.A

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (`Union[str, bytes, bytearray]`) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type `str`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- `infer_missing` (`bool`) –
- `many` (`bool`) –
- `partial` (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json(`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- `skipkeys` (`bool`) –
- `ensure_ascii` (`bool`) –
- `check_circular` (`bool`) –
- `allow_nan` (`bool`) –
- `indent` (`Optional[Union[int, str]]`) –
- `separators` (`Optional[Tuple[str, str]]`) –
- `default` (`Optional[Callable]`) –
- `sort_keys` (`bool`) –

Return type `str`

Attributes

```

amsgrad: bool = False
betas: Tuple[float, float] = (0.9, 0.999)
eps: float = 1e-08
weight_decay: float = 0

```

4.6.4 d3rlpy.models.RMSpropFactory

```

class d3rlpy.models.RMSpropFactory(alpha=0.95, eps=0.01, weight_decay=0.0, momentum=0.0,
                                   centered=True)

```

An alias for RMSprop optimizer.

```

from d3rlpy.optimizers import RMSpropFactory

factory = RMSpropFactory(weight_decay=1e-4)

```

Parameters

- **alpha** (*float*) – smoothing constant.
- **eps** (*float*) – term added to the denominator to improve numerical stability.
- **weight_decay** (*float*) – weight decay (L2 penalty).
- **momentum** (*float*) – momentum factor.
- **centered** (*bool*) – flag to compute the centered RMSProp, the gradient is normalized by an estimation of its variance.

Return type *None*

Methods

create(*named_modules, lr*)

Returns an optimizer object.

Parameters

- **named_modules** (*list*) – List of tuples of module names and modules.
- **lr** (*float*) – Learning rate.

Returns an optimizer object.

Return type torch.optim.Optimizer

classmethod deserialize(*serialized_config*)

Parameters **serialized_config** (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters **dict_config** (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters `path` (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs` (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s` (*Union[str, bytes, bytearray]*) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type *str*

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- `infer_missing` (*bool*) –
- `many` (*bool*) –
- `partial` (*bool*) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type *str*

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict (*encode_json=False*)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json (**, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw*)

Parameters

- `skipkeys` (*bool*) –
- `ensure_ascii` (*bool*) –

- `check_circular` (*bool*) –
- `allow_nan` (*bool*) –
- `indent` (*Optional[Union[int, str]]*) –
- `separators` (*Optional[Tuple[str, str]]*) –
- `default` (*Optional[Callable]*) –
- `sort_keys` (*bool*) –

Return type *str*

Attributes

`alpha`: *float* = 0.95
`centered`: *bool* = True
`eps`: *float* = 0.01
`momentum`: *float* = 0.0
`weight_decay`: *float* = 0.0

4.6.5 d3rlpy.models.GPTAdamWFactory

`class d3rlpy.models.GPTAdamWFactory(betas=(0.9, 0.999), eps=1e-08, weight_decay=0, amsgrad=False)`
AdamW optimizer for Decision Transformer architectures.

```
from d3rlpy.optimizers import GPTAdamWFactory

factory = GPTAdamWFactory(weight_decay=1e-4)
```

Parameters

- `betas` (*Tuple[float, float]*) – coefficients used for computing running averages of gradient and its square.
- `eps` (*float*) – term added to the denominator to improve numerical stability.
- `weight_decay` (*float*) – weight decay (L2 penalty).
- `amsgrad` (*bool*) – flag to use the AMSGrad variant of this algorithm.

Return type *None*

Methods

`create(named_modules, lr)`
Returns an optimizer object.

Parameters

- `named_modules` (*list*) – List of tuples of module names and modules.
- `lr` (*float*) – Learning rate.

Returns an optimizer object.

Return type torch.optim.Optimizer

classmethod `deserialize(serialized_config)`

Parameters `serialized_config (str)` –

Return type d3rlpy.serializable_config.TConfig

classmethod `deserialize_from_dict(dict_config)`

Parameters `dict_config (Dict[str, Any])` –

Return type d3rlpy.serializable_config.TConfig

classmethod `deserialize_from_file(path)`

Parameters `path (str)` –

Return type d3rlpy.serializable_config.TConfig

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters `kvs (Optional[Union[dict, list, str, int, float, bool]])` –

Return type dataclasses_json.api.A

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters `s (Union[str, bytes, bytearray])` –

Return type dataclasses_json.api.A

static `get_type()`

Return type str

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- `infer_missing (bool)` –
- `many (bool)` –
- `partial (bool)` –

Return type dataclasses_json.mm.SchemaF[dataclasses_json.api.A]

serialize()

Return type str

serialize_to_dict()

Return type Dict[str, Any]

`to_dict(encode_json=False)`

Return type Dict[str, Optional[Union[dict, list, str, int, float, bool]]]

`to_json(*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw)`

Parameters

- `skipkeys` (bool) –
- `ensure_ascii` (bool) –
- `check_circular` (bool) –
- `allow_nan` (bool) –
- `indent` (Optional[Union[int, str]]) –
- `separators` (Optional[Tuple[str, str]]) –
- `default` (Optional[Callable]) –
- `sort_keys` (bool) –

Return type str

Attributes

`amsgrad`: bool = False

`betas`: Tuple[float, float] = (0.9, 0.999)

`eps`: float = 1e-08

`weight_decay`: float = 0

4.7 Network Architectures

In d3rlpy, the neural network architecture is automatically selected based on observation shape. If the observation is image, the algorithm uses the Nature DQN-based encoder at each function. Otherwise, the standard MLP architecture that consists with two linear layers with 256 hidden units.

Furthermore, d3rlpy provides `EncoderFactory` that gives you flexible control over the neural network architectures.

```
import d3rlpy

# encoder factory
encoder_factory = d3rlpy.models.VectorEncoderFactory(
    hidden_units=[300, 400],
    activation='tanh',
)

# set EncoderFactory
dqn = d3rlpy.algos.DQNConfig(encoder_factory=encoder_factory).create()
```

You can also build your own encoder factory.

```

import dataclasses
import torch
import torch.nn as nn

from d3rlpy.models.encoders import EncoderFactory

# your own neural network
class CustomEncoder(nn.Module):
    def __init__(self, observation_shape, feature_size):
        self.feature_size = feature_size
        self.fc1 = nn.Linear(observation_shape[0], 64)
        self.fc2 = nn.Linear(64, feature_size)

    def forward(self, x):
        h = torch.relu(self.fc1(x))
        h = torch.relu(self.fc2(h))
        return h

# your own encoder factory
@dataclasses.dataclass()
class CustomEncoderFactory(EncoderFactory):
    feature_size: int

    def create(self, observation_shape):
        return CustomEncoder(observation_shape, self.feature_size)

    @staticmethod
    def get_type() -> str:
        return "custom"

dqn = d3rlpy.algos.DQNConfig(
    encoder_factory=CustomEncoderFactory(feature_size=64),
).create()

```

You can also define action-conditioned networks such as Q-functions for continuous controls. `create` or `create_with_action` will be called depending on the function.

```

class CustomEncoderWithAction(nn.Module):
    def __init__(self, observation_shape, action_size, feature_size):
        self.feature_size = feature_size
        self.fc1 = nn.Linear(observation_shape[0] + action_size, 64)
        self.fc2 = nn.Linear(64, feature_size)

    def forward(self, x, action): # action is also given
        h = torch.cat([x, action], dim=1)
        h = torch.relu(self.fc1(h))
        h = torch.relu(self.fc2(h))
        return h

@dataclasses.dataclass()
class CustomEncoderFactory(EncoderFactory):
    feature_size: int

```

(continues on next page)

(continued from previous page)

```

def create(self, observation_shape):
    return CustomEncoder(observation_shape, self.feature_size)

def create_with_action(observation_shape, action_size, discrete_action):
    return CustomEncoderWithAction(observation_shape, action_size, self.feature_size)

@staticmethod
def get_type() -> str:
    return "custom"

factory = CustomEncoderFactory(feature_size=64)

sac = d3rlpy.algos.SACConfig(
    actor_encoder_factory=factory,
    critic_encoder_factory=factory,
).create()

```

If you want `load_learnable` method to load the algorithm configuration including your encoder configuration, you need to register your encoder factory.

```

from d3rlpy.models.encoders import register_encoder_factory

# register your own encoder factory
register_encoder_factory(CustomEncoderFactory)

# load algorithm from d3
dqn = d3rlpy.load_learnable("model.d3")

```

<code>d3rlpy.models.DefaultEncoderFactory</code>	Default encoder factory class.
<code>d3rlpy.models.PixelEncoderFactory</code>	Pixel encoder factory class.
<code>d3rlpy.models.VectorEncoderFactory</code>	Vector encoder factory class.

4.7.1 d3rlpy.models.DefaultEncoderFactory

```

class d3rlpy.models.DefaultEncoderFactory(activation='relu', use_batch_norm=False,
                                          dropout_rate=None)

```

Default encoder factory class.

This encoder factory returns an encoder based on observation shape.

Parameters

- **activation** (*str*) – activation function name.
- **use_batch_norm** (*bool*) – flag to insert batch normalization layers.
- **dropout_rate** (*float*) – dropout probability.

Return type `None`

Methods

create(*observation_shape*)

Returns PyTorch's state enocder module.

Parameters **observation_shape** (*Union[Sequence[int], Sequence[Sequence[int]]]*) – observation shape.

Returns an enocder object.

Return type d3rlpy.models.torch.encoders.Encoder

create_with_action(*observation_shape, action_size, discrete_action=False*)

Returns PyTorch's state-action enocder module.

Parameters

- **observation_shape** (*Union[Sequence[int], Sequence[Sequence[int]]]*) – observation shape.
- **action_size** (*int*) – action size. If None, the encoder does not take action as input.
- **discrete_action** (*bool*) – flag if action-space is discrete.

Returns an enocder object.

Return type d3rlpy.models.torch.encoders.EncoderWithAction

classmethod deserialize(*serialized_config*)

Parameters **serialized_config** (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters **dict_config** (*Dict[str, Any]*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_file(*path*)

Parameters **path** (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod from_dict(*kvs, *, infer_missing=False*)

Parameters **kvs** (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type dataclasses_json.api.A

classmethod from_json(*s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw*)

Parameters **s** (*Union[str, bytes, bytearray]*) –

Return type dataclasses_json.api.A

static get_type()

Return type `str`

classmethod `schema`(*, *infer_missing=False*, *only=None*, *exclude=()*, *many=False*, *context=None*, *load_only=()*, *dump_only=()*, *partial=False*, *unknown=None*)

Parameters

- `infer_missing` (*bool*) –
- `many` (*bool*) –
- `partial` (*bool*) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

`serialize()`

Return type `str`

`serialize_to_dict()`

Return type `Dict[str, Any]`

`to_dict`(*encode_json=False*)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json(*, *skipkeys=False*, *ensure_ascii=True*, *check_circular=True*, *allow_nan=True*, *indent=None*, *separators=None*, *default=None*, *sort_keys=False*, **kw)

Parameters

- `skipkeys` (*bool*) –
- `ensure_ascii` (*bool*) –
- `check_circular` (*bool*) –
- `allow_nan` (*bool*) –
- `indent` (*Optional[Union[int, str]]*) –
- `separators` (*Optional[Tuple[str, str]]*) –
- `default` (*Optional[Callable]*) –
- `sort_keys` (*bool*) –

Return type `str`

Attributes

activation: `str` = 'relu'
dropout_rate: `Optional[float]` = None
use_batch_norm: `bool` = False

4.7.2 d3rlpy.models.PixelEncoderFactory

```
class d3rlpy.models.PixelEncoderFactory(filters=<factory>, feature_size=512, activation='relu',  
                                         use_batch_norm=False, dropout_rate=None,  
                                         exclude_last_activation=False, last_activation=None)
```

Pixel encoder factory class.

This is the default encoder factory for image observation.

Parameters

- **filters** (`list`) – List of tuples consisting with (filter_size, kernel_size, stride). If None, Nature DQN-based architecture is used.
- **feature_size** (`int`) – Last linear layer size.
- **activation** (`str`) – Activation function name.
- **use_batch_norm** (`bool`) – Flag to insert batch normalization layers.
- **dropout_rate** (`float`) – Dropout probability.
- **exclude_last_activation** (`bool`) – Flag to exclude activation function at the last layer.
- **last_activation** (`str`) – Activation function name for the last layer.

Return type `None`

Methods

create(*observation_shape*)

Returns PyTorch's state encoder module.

Parameters *observation_shape* (`Union[Sequence[int], Sequence[Sequence[int]]]`) – observation shape.

Returns an encoder object.

Return type `d3rlpy.models.torch.encoders.PixelEncoder`

create_with_action(*observation_shape*, *action_size*, *discrete_action=False*)

Returns PyTorch's state-action encoder module.

Parameters

- **observation_shape** (`Union[Sequence[int], Sequence[Sequence[int]]]`) – observation shape.
- **action_size** (`int`) – action size. If None, the encoder does not take action as input.
- **discrete_action** (`bool`) – flag if action-space is discrete.

Returns an encoder object.

Return type `d3rlpy.models.torch.encoders.PixelEncoderWithAction`

classmethod `deserialize(serialized_config)`

Parameters **serialized_config** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_dict(dict_config)`

Parameters **dict_config** (*Dict[str, Any]*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `deserialize_from_file(path)`

Parameters **path** (*str*) –

Return type `d3rlpy.serializable_config.TConfig`

classmethod `from_dict(kvs, *, infer_missing=False)`

Parameters **kvs** (*Optional[Union[dict, list, str, int, float, bool]]*) –

Return type `dataclasses_json.api.A`

classmethod `from_json(s, *, parse_float=None, parse_int=None, parse_constant=None, infer_missing=False, **kw)`

Parameters **s** (*Union[str, bytes, bytearray]*) –

Return type `dataclasses_json.api.A`

static `get_type()`

Return type *str*

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- **infer_missing** (*bool*) –
- **many** (*bool*) –
- **partial** (*bool*) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type *str*

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict (*encode_json=False*)

Return type Dict[str, Optional[Union[dict, list, str, int, float, bool]]]

to_json(* , skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw)

Parameters

- **skipkeys** (*bool*) –
- **ensure_ascii** (*bool*) –
- **check_circular** (*bool*) –
- **allow_nan** (*bool*) –
- **indent** (Optional[Union[int, str]]) –
- **separators** (Optional[Tuple[str, str]]) –
- **default** (Optional[Callable]) –
- **sort_keys** (*bool*) –

Return type str

Attributes

activation: str = 'relu'
dropout_rate: Optional[float] = None
exclude_last_activation: bool = False
feature_size: int = 512
last_activation: Optional[str] = None
use_batch_norm: bool = False

4.7.3 d3rlpy.models.VectorEncoderFactory

class d3rlpy.models.VectorEncoderFactory(*hidden_units=<factory>*, *activation='relu'*,
use_batch_norm=False, dropout_rate=None,
exclude_last_activation=False, last_activation=None)

Vector encoder factory class.

This is the default encoder factory for vector observation.

Parameters

- **hidden_units** (*list*) – List of hidden unit sizes. If None, the standard architecture with [256, 256] is used.
- **activation** (*str*) – activation function name.
- **use_batch_norm** (*bool*) – Flag to insert batch normalization layers.
- **dropout_rate** (*float*) – Dropout probability.
- **exclude_last_activation** (*bool*) – Flag to exclude activation function at the last layer.
- **last_activation** (*str*) – Activation function name for the last layer.

Return type None

Methods

create(*observation_shape*)

Returns PyTorch's state encoder module.

Parameters *observation_shape* (*Union*[*Sequence*[*int*], *Sequence*[*Sequence*[*int*]]]) – observation shape.

Returns an encoder object.

Return type d3rlpy.models.torch.encoders.VectorEncoder

create_with_action(*observation_shape*, *action_size*, *discrete_action=False*)

Returns PyTorch's state-action encoder module.

Parameters

- **observation_shape** (*Union*[*Sequence*[*int*], *Sequence*[*Sequence*[*int*]]]) – observation shape.
- **action_size** (*int*) – action size. If None, the encoder does not take action as input.
- **discrete_action** (*bool*) – flag if action-space is discrete.

Returns an encoder object.

Return type d3rlpy.models.torch.encoders.VectorEncoderWithAction

classmethod deserialize(*serialized_config*)

Parameters *serialized_config* (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_dict(*dict_config*)

Parameters *dict_config* (*Dict*[*str*, *Any*]) –

Return type d3rlpy.serializable_config.TConfig

classmethod deserialize_from_file(*path*)

Parameters *path* (*str*) –

Return type d3rlpy.serializable_config.TConfig

classmethod from_dict(*kvs*, *, *infer_missing=False*)

Parameters *kvs* (*Optional*[*Union*[*dict*, *list*, *str*, *int*, *float*, *bool*]]]) –

Return type dataclasses_json.api.A

classmethod from_json(*s*, *, *parse_float=None*, *parse_int=None*, *parse_constant=None*, *infer_missing=False*, ***kw*)

Parameters *s* (*Union*[*str*, *bytes*, *bytearray*]) –

Return type dataclasses_json.api.A

static get_type()

Return type `str`

classmethod `schema(*, infer_missing=False, only=None, exclude=(), many=False, context=None, load_only=(), dump_only=(), partial=False, unknown=None)`

Parameters

- `infer_missing` (`bool`) –
- `many` (`bool`) –
- `partial` (`bool`) –

Return type `dataclasses_json.mm.SchemaF[dataclasses_json.api.A]`

serialize()

Return type `str`

serialize_to_dict()

Return type `Dict[str, Any]`

to_dict(`encode_json=False`)

Return type `Dict[str, Optional[Union[dict, list, str, int, float, bool]]]`

to_json(`*, skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, indent=None, separators=None, default=None, sort_keys=False, **kw`)

Parameters

- `skipkeys` (`bool`) –
- `ensure_ascii` (`bool`) –
- `check_circular` (`bool`) –
- `allow_nan` (`bool`) –
- `indent` (`Optional[Union[int, str]]`) –
- `separators` (`Optional[Tuple[str, str]]`) –
- `default` (`Optional[Callable]`) –
- `sort_keys` (`bool`) –

Return type `str`

Attributes

```

activation: str = 'relu'
dropout_rate: Optional[float] = None
exclude_last_activation: bool = False
last_activation: Optional[str] = None
use_batch_norm: bool = False

```

4.8 Metrics

d3rlpy provides scoring functions for offline Q-learning-based training. You can also check [Logging](#) to understand how to write metrics to files.

```

import d3rlpy

dataset, env = d3rlpy.datasets.get_cartpole()
# use partial episodes as test data
test_episodes = dataset.episodes[:10]

dqn = d3rlpy.algos.DQNConfig().create()

dqn.fit(
    dataset,
    n_steps=100000,
    evaluators={
        'td_error': d3rlpy.metrics.TDErrorEvaluator(test_episodes),
        'value_scale': d3rlpy.metrics.AverageValueEstimationEvaluator(test_episodes),
        'environment': d3rlpy.metrics.EnvironmentEvaluator(env),
    },
)

```

You can also implement your own metrics.

```

class CustomEvaluator(d3rlpy.metrics.EvaluatorProtocol):
    def __call__(self, algo: d3rlpy.algos.QLearningAlgoBase, dataset: ReplayBuffer) -> float:
        # do some evaluation

```

<code>d3rlpy.metrics.TDErrorEvaluator</code>	Returns average TD error.
<code>d3rlpy.metrics.DiscountedSumOfAdvantageEvaluator</code>	Returns average of discounted sum of advantage.
<code>d3rlpy.metrics.AverageValueEstimationEvaluator</code>	Returns average value estimation.
<code>d3rlpy.metrics.InitialStateValueEstimationEvaluator</code>	Returns mean estimated action-values at the initial states.
<code>d3rlpy.metrics.SoftOPCEvaluator</code>	Returns Soft Off-Policy Classification metrics.
<code>d3rlpy.metrics.ContinuousActionDiffEvaluator</code>	Returns squared difference of actions between algorithm and dataset.
<code>d3rlpy.metrics.DiscreteActionMatchEvaluator</code>	Returns percentage of identical actions between algorithm and dataset.

continues on next page

Table 15 – continued from previous page

<code>d3rlpy.metrics.EnvironmentEvaluator</code>	Action matches between algorithms.
<code>d3rlpy.metrics.CompareContinuousActionDiffEvaluator</code>	Action difference between algorithms.
<code>d3rlpy.metrics.CompareDiscreteActionMatchEvaluator</code>	Action matches between algorithms.

4.8.1 d3rlpy.metrics.TDErrorEvaluator

class `d3rlpy.metrics.TDErrorEvaluator`(*episodes=None*)

Returns average TD error.

This metric suggests how Q functions overfit to training sets. If the TD error is large, the Q functions are overfitting.

$$\mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(Q_\theta(s_t, a_t) - r_{t+1} - \gamma \max_a Q_\theta(s_{t+1}, a))^2]$$

Parameters `episodes` – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

`__call__`(*algo, dataset*)

Computes metrics.

Parameters

- **algo** (`d3rlpy.interface.QLearningAlgoProtocol`) – Q-learning algorithm.
- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – ReplayBuffer.

Returns Computed metrics.

Return type `float`

4.8.2 d3rlpy.metrics.DiscountedSumOfAdvantageEvaluator

class `d3rlpy.metrics.DiscountedSumOfAdvantageEvaluator`(*episodes=None*)

Returns average of discounted sum of advantage.

This metric suggests how the greedy-policy selects different actions in action-value space. If the sum of advantage is small, the policy selects actions with larger estimated action-values.

$$\mathbb{E}_{s_t, a_t \sim D} [\sum_{t'=t} \gamma^{t'-t} A(s_{t'}, a_{t'})]$$

where $A(s_t, a_t) = Q_\theta(s_t, a_t) - \mathbb{E}_{a \sim \pi}[Q_\theta(s_t, a)]$.

References

- Murphy., A generalization error for Q-Learning.

Parameters `episodes` – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo*, *dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type float

4.8.3 d3rlpy.metrics.AverageValueEstimationEvaluator

class *d3rlpy.metrics.AverageValueEstimationEvaluator*(*episodes=None*)

Returns average value estimation.

This metric suggests the scale for estimation of Q functions. If average value estimation is too large, the Q functions overestimate action-values, which possibly makes training failed.

$$\mathbb{E}_{s_t \sim D} [\max_a Q_\theta(s_t, a)]$$

Parameters **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo*, *dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type float

4.8.4 d3rlpy.metrics.InitialStateValueEstimationEvaluator

class *d3rlpy.metrics.InitialStateValueEstimationEvaluator*(*episodes=None*)

Returns mean estimated action-values at the initial states.

This metric suggests how much return the trained policy would get from the initial states by deploying the policy to the states. If the estimated value is large, the trained policy is expected to get higher returns.

$$\mathbb{E}_{s_0 \sim D} [Q(s_0, \pi(s_0))]$$

References

- Paine et al., Hyperparameter Selection for Offline Reinforcement Learning

Parameters **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo, dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type *float*

4.8.5 d3rlpy.metrics.SoftOPCEvaluator

class *d3rlpy.metrics.SoftOPCEvaluator*(*return_threshold, episodes=None*)

Returns Soft Off-Policy Classification metrics.

The metric of the scorer function is evaluating gaps of action-value estimation between the success episodes and the all episodes. If the learned Q-function is optimal, action-values in success episodes are expected to be higher than the others. The success episode is defined as an episode with a return above the given threshold.

$$\mathbb{E}_{s,a \sim D_{success}}[Q(s,a)] - \mathbb{E}_{s,a \sim D}[Q(s,a)]$$

References

- Irpan et al., Off-Policy Evaluation via Off-Policy Classification.

Parameters

- **return_threshold** – Return threshold of success episodes.
- **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo, dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type *float*

4.8.6 d3rlpy.metrics.ContinuousActionDiffEvaluator

class d3rlpy.metrics.ContinuousActionDiffEvaluator(*episodes=None*)

Returns squared difference of actions between algorithm and dataset.

This metric suggests how different the greedy-policy is from the given episodes in continuous action-space. If the given episodes are near-optimal, the small action difference would be better.

$$\mathbb{E}_{s_t, a_t \sim D}[(a_t - \pi_\phi(s_t))^2]$$

Parameters **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo, dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type float

4.8.7 d3rlpy.metrics.DiscreteActionMatchEvaluator

class d3rlpy.metrics.DiscreteActionMatchEvaluator(*episodes=None*)

Returns percentage of identical actions between algorithm and dataset.

This metric suggests how different the greedy-policy is from the given episodes in discrete action-space. If the given episodes are near-optimal, the large percentage would be better.

$$\frac{1}{N} \sum^N \mathbb{I}\{a_t = \operatorname{argmax}_a Q_\theta(s_t, a)\}$$

Parameters **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo, dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type float

4.8.8 d3rlpy.metrics.EnvironmentEvaluator

class d3rlpy.metrics.EnvironmentEvaluator(*env*, *n_trials*=10, *epsilon*=0.0)

Action matches between algorithms.

This metric suggests how different the two algorithms are in discrete action-space. If the algorithm to compare with is near-optimal, the small action difference would be better.

$$\mathbb{E}_{s_t \sim D} [\| \{ \operatorname{argmax}_a Q_{\theta_1}(s_t, a) = \operatorname{argmax}_a Q_{\theta_2}(s_t, a) \} \|]$$

Parameters

- **env** – Gym environment.
- **n_trials** – Number of episodes to evaluate.
- **epsilon** – Probability of random action.

Methods

__call__(*algo*, *dataset*)

Computes metrics.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Q-learning algorithm.
- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer.

Returns Computed metrics.

Return type float

4.8.9 d3rlpy.metrics.CompareContinuousActionDiffEvaluator

class d3rlpy.metrics.CompareContinuousActionDiffEvaluator(*base_algo*, *episodes*=None)

Action difference between algorithms.

This metric suggests how different the two algorithms are in continuous action-space. If the algorithm to compare with is near-optimal, the small action difference would be better.

$$\mathbb{E}_{s_t \sim D} [(\pi_{\phi_1}(s_t) - \pi_{\phi_2}(s_t))^2]$$

Parameters

- **base_algo** – Target algorithm to compare with.
- **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo*, *dataset*)

Computes metrics.

Parameters

- **algo** (`d3rlpy.interface.QLearningAlgoProtocol`) – Q-learning algorithm.
- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – ReplayBuffer.

Returns Computed metrics.

Return type `float`

4.8.10 d3rlpy.metrics.CompareDiscreteActionMatchEvaluator

class `d3rlpy.metrics.CompareDiscreteActionMatchEvaluator`(*base_algo*, *episodes=None*)

Action matches between algorithms.

This metric suggests how different the two algorithms are in discrete action-space. If the algorithm to compare with is near-optimal, the small action difference would be better.

$$\mathbb{E}_{s_t \sim D} [\| \{ \operatorname{argmax}_a Q_{\theta_1}(s_t, a) = \operatorname{argmax}_a Q_{\theta_2}(s_t, a) \} \|]$$

Parameters

- **base_algo** – Target algorithm to compare with.
- **episodes** – Optional evaluation episodes. If it's not given, dataset used in training will be used.

Methods

__call__(*algo*, *dataset*)

Computes metrics.

Parameters

- **algo** (`d3rlpy.interface.QLearningAlgoProtocol`) – Q-learning algorithm.
- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – ReplayBuffer.

Returns Computed metrics.

Return type `float`

4.9 Off-Policy Evaluation

The off-policy evaluation is a method to estimate the trained policy performance only with offline datasets.

```
import d3rlpy

# prepare the trained algorithm
cql = d3rlpy.load_learnable("model.d3")

# dataset to evaluate with
```

(continues on next page)

(continued from previous page)

```

dataset, env = d3rlpy.datasets.get_pendulum()

# off-policy evaluation algorithm
fqe = d3rlpy.ope.FQE(algo=cql, config=d3rlpy.ope.FQEConfig())

# train estimators to evaluate the trained policy
fqe.fit(
    dataset,
    n_steps=1000000,
    evaluators={
        'init_value': d3rlpy.metrics.InitialStateValueEstimationEvaluator(),
        'soft_opc': d3rlpy.metrics.SoftOPCEvaluator(return_threshold=-300),
    },
)

```

The evaluation during fitting is evaluating the trained policy.

4.9.1 For continuous control algorithms

d3rlpy.ope.FQE

Fitted Q Evaluation.

d3rlpy.ope.FQE

class d3rlpy.ope.FQE(*algo, config, device=False, impl=None*)

Fitted Q Evaluation.

FQE is an off-policy evaluation method that approximates a Q function $Q_\theta(s, a)$ with the trained policy $\pi_\phi(s)$.

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1} | s_{t+1} \sim D} [(Q_\theta(s_t, a_t) - r_{t+1} - \gamma Q_{\theta'}(s_{t+1}, \pi_\phi(s_{t+1})))^2]$$

The trained Q function in FQE will estimate evaluation metrics more accurately than learned Q function during training.

References

- Le et al., Batch Policy Learning under Constraints.

Parameters

- **algo** (*d3rlpy.algos.base.AlgoBase*) – Algorithm to evaluate.
- **config** (*d3rlpy.ope.FQEConfig*) – FQE config.
- **device** (*bool, int or str*) – Flag to use GPU, device ID or PyTorch device identifier.
- **impl** (*d3rlpy.metrics.ope.torch.FQEImpl*) – Algorithm implementation.

Methods

build_with_dataset(*dataset*)

Instantiate implementation object with ReplayBuffer object.

Parameters *dataset* (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – dataset.

Return type `None`

build_with_env(*env*)

Instantiate implementation object with OpenAI Gym object.

Parameters *env* (`Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]`) – gym-like environment.

Return type `None`

collect(*env*, *buffer=None*, *explorer=None*, *deterministic=False*, *n_steps=1000000*, *show_progress=True*)

Collects data via interaction with environment.

If buffer is not given, ReplayBuffer will be internally created.

Parameters

- **env** (`Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]`) – Fym-like environment.
- **buffer** (`Optional[d3rlpy.dataset.replay_buffer.ReplayBuffer]`) – Replay buffer.
- **explorer** (`Optional[d3rlpy.algos.qlearning.explorers.Explorer]`) – Action explorer.
- **deterministic** (`bool`) – Flag to collect data with the greedy policy.
- **n_steps** (`int`) – Number of total steps to train.
- **show_progress** (`bool`) – Flag to show progress bar for iterations.

Returns Replay buffer with the collected data.

Return type `d3rlpy.dataset.replay_buffer.ReplayBuffer`

copy_policy_from(*algo*)

Copies policy parameters from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=1000000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_from(cql)
```

Parameters *algo* (`(d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig])`) – Algorithm object.

Return type `None`

copy_policy_optim_from(*algo*)

Copies policy optimizer states from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_optim_from(cql)
```

Parameters `algo` (d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]) – Algorithm object.

Return type `None`

copy_q_function_from(*algo*)

Copies Q-function parameters from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_q_function_from(cql)
```

Parameters `algo` (d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]) – Algorithm object.

Return type `None`

copy_q_function_optim_from(*algo*)

Copies Q-function optimizer states from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_optim_from(cql)
```

Parameters `algo` (d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]) – Algorithm object.

Return type `None`

create_impl(*observation_shape*, *action_size*)

Instantiate implementation objects with the dataset shapes.

This method will be used internally when *fit* method is called.

Parameters

- **observation_shape** (*Union[Sequence[int], Sequence[Sequence[int]]]*) – observation shape.
- **action_size** (*int*) – dimension of action-space.

Return type *None*

fit(*dataset*, *n_steps*, *n_steps_per_epoch*=10000, *experiment_name*=None, *with_timestamp*=True, *logging_steps*=500, *logging_strategy*=<LoggingStrategy.EPOCH: 'epoch'>, *logger_adapter*=<d3rlpy.logging.file_adapter.FileAdapterFactory object>, *show_progress*=True, *save_interval*=1, *evaluators*=None, *callback*=None, *epoch_callback*=None, *enable_ddp*=False)
Trains with given dataset.

```
algo.fit(episodes, n_steps=1000000)
```

Parameters

- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – ReplayBuffer object.
- **n_steps** (*int*) – Number of steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch. This value will be ignored when *n_steps* is None.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be {class name}_{timestamp}.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if logging_strategy is EPOCH.
- **logging_strategy** (*d3rlpy.constants.LoggingStrategy*) – Logging strategy to use.
- **logger_adapter** (*d3rlpy.logging.logger.LoggerAdapterFactory*) – LoggerAdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **save_interval** (*int*) – Interval to save parameters.
- **evaluators** (*Optional[Dict[str, d3rlpy.metrics.evaluators.EvaluatorProtocol]]*) – List of evaluators.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called every step.
- **epoch_callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called at the end of every epoch.
- **enable_ddp** (*bool*) – Flag to wrap models with DataDistributedParallel.

Returns List of result tuples (epoch, metrics) per epoch.

Return type List[Tuple[int, Dict[str, float]]]

```
fit_online(env, buffer=None, explorer=None, n_steps=1000000, n_steps_per_epoch=10000,
            update_interval=1, update_start_step=0, random_steps=0, eval_env=None, eval_epsilon=0.0,
            save_interval=1, experiment_name=None, with_timestamp=True, logging_steps=500,
            logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>,
            logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>,
            show_progress=True, callback=None)
```

Start training loop of online deep reinforcement learning.

Parameters

- **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym-like environment.
- **buffer** (*Optional[d3rlpy.dataset.replay_buffer.ReplayBuffer]*) – Replay buffer.
- **explorer** (*Optional[d3rlpy.algos.qlearning.explorers.Explorer]*) – Action explorer.
- **n_steps** (*int*) – Number of total steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch.
- **update_interval** (*int*) – Number of steps per update.
- **update_start_step** (*int*) – Steps before starting updates.
- **random_steps** (*int*) – Steps for the initial random exploration.
- **eval_env** (*Optional[Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]]*) – Gym-like environment. If None, evaluation is skipped.
- **eval_epsilon** (*float*) – ϵ -greedy factor during evaluation.
- **save_interval** (*int*) – Number of epochs before saving models.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be {class name}_online_{timestamp}.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if logging_strategy is EPOCH.
- **logging_strategy** (*d3rlpy.constants.LoggingStrategy*) – Logging strategy to use.
- **logger_adapter** (*d3rlpy.logging.logger.LoggerAdapterFactory*) – Logger-AdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called at the end of epochs.

Return type `None`

```
fitter(dataset, n_steps, n_steps_per_epoch=10000, logging_steps=500,
        logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>, experiment_name=None,
        with_timestamp=True, logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>,
        show_progress=True, save_interval=1, evaluators=None, callback=None, epoch_callback=None,
        enable_ddp=False)
```

Iterate over epochs steps to train with the given dataset. At each iteration algo methods and properties can

be changed or queried.

```
for epoch, metrics in algo.fitter(epochs):
    my_plot(metrics)
    algo.save_model(my_path)
```

Parameters

- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – Offline dataset to train.
- **n_steps** (*int*) – Number of steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch. This value will be ignored when `n_steps` is `None`.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be `{class name}_{timestamp}`.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if `logging_strategy` is `EPOCH`.
- **logging_strategy** (`d3rlpy.constants.LoggingStrategy`) – Logging strategy to use.
- **logger_adapter** (`d3rlpy.logging.logger.LoggerAdapterFactory`) – Logger-AdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **save_interval** (*int*) – Interval to save parameters.
- **evaluators** (*Optional[Dict[str, d3rlpy.metrics.evaluators.EvaluatorProtocol]]*) – List of evaluators.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (`algo`, `epoch`, `total_step`), which is called every step.
- **epoch_callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (`algo`, `epoch`, `total_step`), which is called at the end of every epoch.
- **enable_ddp** (*bool*) – Flag to wrap models with `DataDistributedParallel`.

Returns Iterator yielding current epoch and metrics dict.

Return type `Generator[Tuple[int, Dict[str, float]], None, None]`

classmethod `from_json(fname, device=False)`

Construct algorithm from `params.json` file.

```
from d3rlpy.algos import CQL

cql = CQL.from_json("<path-to-json>", device='cuda:0')
```

Parameters

- **fname** (*str*) – path to `params.json`

- **device** (`Union[int, str, bool]`) – device option. If the value is boolean and True, `cuda:0` will be used. If the value is integer, `cuda:<device>` will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type `typing_extensions.Self`

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type `d3rlpy.constants.ActionSpace`

inner_create_impl(*observation_shape*, *action_size*)

Parameters

- **observation_shape** (`Union[Sequence[int], Sequence[Sequence[int]]]`) –
- **action_size** (`int`) –

Return type `None`

load_model(*fname*)

Load neural network parameters.

```
algo.load_model('model.pt')
```

Parameters **fname** (`str`) – source file path.

Return type `None`

predict(*x*)

Returns greedy actions.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

actions = algo.predict(x)
# actions.shape == (100, action size) for continuous control
# actions.shape == (100,) for discrete control
```

Parameters **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations

Returns Greedy actions

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

predict_value(*x*, *action*)

Returns predicted action-values.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

# for continuous control
```

(continues on next page)

(continued from previous page)

```
# 100 actions with shape of (2,)
actions = np.random.random((100, 2))

# for discrete control
# 100 actions in integer values
actions = np.random.randint(2, size=100)

values = algo.predict_value(x, actions)
# values.shape == (100,)
```

Parameters

- **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations
- **action** (`numpy.ndarray[Any, numpy.dtype[Any]]`) – Actions

Returns Predicted action-values**Return type** `numpy.ndarray[Any, numpy.dtype[Any]]`**reset_optimizer_states()**

Resets optimizer states.

This is especially useful when fine-tuning policies with setting initial optimizer states.

Return type `None`**sample_action(x)**

Returns sampled actions.

The sampled actions are identical to the output of *predict* method if the policy is deterministic.**Parameters** **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) – Observations.**Returns** Sampled actions.**Return type** `numpy.ndarray[Any, numpy.dtype[Any]]`**save(fname)**

Saves paired data of neural network parameters and serialized config.

```
algo.save('model.d3')

# reconstruct everything
algo2 = d3rlpy.load_learnable("model.d3", device="cuda:0")
```

Parameters **fname** (`str`) – destination file path.**Return type** `None`**save_model(fname)**

Saves neural network parameters.

```
algo.save_model('model.pt')
```

Parameters **fname** (`str`) – destination file path.

Return type `None`

save_policy(*fname*)

Save the greedy-policy computational graph as TorchScript or ONNX.

The format will be automatically detected by the file name.

```
# save as TorchScript
algo.save_policy('policy.pt')

# save as ONNX
algo.save_policy('policy.onnx')
```

The artifacts saved with this method will work without d3rlpy. This method is especially useful to deploy the learned policy to production environments or embedding systems.

See also

- https://pytorch.org/tutorials/beginner/Intro_to_TorchScript_tutorial.html (for Python).
- https://pytorch.org/tutorials/advanced/cpp_export.html (for C++).
- <https://onnx.ai> (for ONNX)

Parameters **fname** (*str*) – Destination file path.

Return type `None`

set_grad_step(*grad_step*)

Set total gradient step counter.

This method can be used to restart the middle of training with an arbitrary gradient step counter, which has effects on periodic functions such as the target update.

Parameters **grad_step** (*int*) – total gradient step counter.

Return type `None`

update(*batch*)

Update parameters with mini-batch of data.

Parameters **batch** (*d3rlpy.dataset.mini_batch.TransitionMiniBatch*) – Mini-batch data.

Returns Dictionary of metrics.

Return type `Dict[str, float]`

Attributes

action_scaler

Preprocessing action scaler.

Returns preprocessing action scaler.

Return type `Optional[ActionScaler]`

action_size

Action size.

Returns action size.

Return type Optional[int]

algo

batch_size
Batch size to train.
Returns batch size.
Return type int

config
Config.
Returns config.
Return type LearnableConfig

gamma
Discount factor.
Returns discount factor.
Return type float

grad_step
Total gradient step counter.
This value will keep counting after `fit` and `fit_online` methods finish.
Returns total gradient step counter.

impl
Implementation object.
Returns implementation object.
Return type Optional[ImplBase]

observation_scaler
Preprocessing observation scaler.
Returns preprocessing observation scaler.
Return type Optional[ObservationScaler]

observation_shape
Observation shape.
Returns observation shape.
Return type Optional[Sequence[int]]

reward_scaler
Preprocessing reward scaler.
Returns preprocessing reward scaler.
Return type Optional[RewardScaler]

4.9.2 For discrete control algorithms

d3rlpy.ope.DiscreteFQE

 Fitted Q Evaluation for discrete action-space.

d3rlpy.ope.DiscreteFQE

class d3rlpy.ope.**DiscreteFQE**(*algo, config, device=False, impl=None*)

Fitted Q Evaluation for discrete action-space.

FQE is an off-policy evaluation method that approximates a Q function $Q_\theta(s, a)$ with the trained policy $\pi_\phi(s)$.

$$L(\theta) = \mathbb{E}_{s_t, a_t, r_{t+1}, s_{t+1} \sim D} [(Q_\theta(s_t, a_t) - r_{t+1} - \gamma Q_{\theta'}(s_{t+1}, \pi_\phi(s_{t+1})))^2]$$

The trained Q function in FQE will estimate evaluation metrics more accurately than learned Q function during training.

References

- Le et al., Batch Policy Learning under Constraints.

Parameters

- **algo** (d3rlpy.algos.qlearning.base.QLearningAlgoBase) – Algorithm to evaluate.
- **config** (d3rlpy.ope.FQEConfig) – FQE config.
- **device** (*bool, int or str*) – Flag to use GPU, device ID or PyTorch device identifier.
- **impl** (d3rlpy.metrics.ope.torch.DiscreteFQEIml) – Algorithm implementation.

Methods

build_with_dataset(*dataset*)

Instantiate implementation object with ReplayBuffer object.

Parameters **dataset** (d3rlpy.dataset.replay_buffer.ReplayBuffer) – dataset.

Return type *None*

build_with_env(*env*)

Instantiate implementation object with OpenAI Gym object.

Parameters **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – gym-like environment.

Return type *None*

collect(*env, buffer=None, explorer=None, deterministic=False, n_steps=1000000, show_progress=True*)

Collects data via interaction with environment.

If buffer is not given, ReplayBuffer will be internally created.

Parameters

- **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Fym-like environment.
- **buffer** (*Optional[d3rlpy.dataset.replay_buffer.ReplayBuffer]*) – Replay buffer.

- **explorer** (*Optional[d3rlpy.algos.qlearning.explorers.Explorer]*) – Action explorer.
- **deterministic** (*bool*) – Flag to collect data with the greedy policy.
- **n_steps** (*int*) – Number of total steps to train.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.

Returns Replay buffer with the collected data.

Return type *d3rlpy.dataset.replay_buffer.ReplayBuffer*

copy_policy_from(*algo*)

Copies policy parameters from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=1000000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_from(cql)
```

Parameters *algo* (*d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]*) – Algorithm object.

Return type *None*

copy_policy_optim_from(*algo*)

Copies policy optimizer states from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=1000000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_optim_from(cql)
```

Parameters *algo* (*d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]*) – Algorithm object.

Return type *None*

copy_q_function_from(*algo*)

Copies Q-function parameters from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=1000000)

# transfer to online algorithm
```

(continues on next page)

(continued from previous page)

```
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_q_function_from(cql)
```

Parameters `algo` (`d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]`) – Algorithm object.

Return type `None`

copy_q_function_optim_from(`algo`)

Copies Q-function optimizer states from the given algorithm.

```
# pretrain with static dataset
cql = d3rlpy.algos.CQL()
cql.fit(dataset, n_steps=100000)

# transfer to online algorithm
sac = d3rlpy.algos.SAC()
sac.create_impl(cql.observation_shape, cql.action_size)
sac.copy_policy_optim_from(cql)
```

Parameters `algo` (`d3rlpy.algos.qlearning.base.QLearningAlgoBase[d3rlpy.algos.qlearning.base.QLearningAlgoImplBase, d3rlpy.base.LearnableConfig]`) – Algorithm object.

Return type `None`

create_impl(`observation_shape`, `action_size`)

Instantiate implementation objects with the dataset shapes.

This method will be used internally when *fit* method is called.

Parameters

- **observation_shape** (`Union[Sequence[int], Sequence[Sequence[int]]]`) – observation shape.
- **action_size** (`int`) – dimension of action-space.

Return type `None`

fit(`dataset`, `n_steps`, `n_steps_per_epoch=10000`, `experiment_name=None`, `with_timestamp=True`, `logging_steps=500`, `logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>`, `logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>`, `show_progress=True`, `save_interval=1`, `evaluators=None`, `callback=None`, `epoch_callback=None`, `enable_ddp=False`)
Trains with given dataset.

```
algo.fit(epochs, n_steps=1000000)
```

Parameters

- **dataset** (`d3rlpy.dataset.replay_buffer.ReplayBuffer`) – ReplayBuffer object.
- **n_steps** (`int`) – Number of steps to train.

- **n_steps_per_epoch** (*int*) – Number of steps per epoch. This value will be ignored when `n_steps` is `None`.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be `{class name}_{timestamp}`.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if logging_strategy is `EPOCH`.
- **logging_strategy** (`d3rlpy.constants.LoggingStrategy`) – Logging strategy to use.
- **logger_adapter** (`d3rlpy.logging.logger.LoggerAdapterFactory`) – LoggerAdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **save_interval** (*int*) – Interval to save parameters.
- **evaluators** (*Optional[Dict[str, d3rlpy.metrics.evaluators.EvaluatorProtocol]]*) – List of evaluators.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called every step.
- **epoch_callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called at the end of every epoch.
- **enable_ddp** (*bool*) – Flag to wrap models with `DataDistributedParallel`.

Returns List of result tuples (epoch, metrics) per epoch.

Return type `List[Tuple[int, Dict[str, float]]]`

```
fit_online(env, buffer=None, explorer=None, n_steps=1000000, n_steps_per_epoch=10000,
            update_interval=1, update_start_step=0, random_steps=0, eval_env=None, eval_epsilon=0.0,
            save_interval=1, experiment_name=None, with_timestamp=True, logging_steps=500,
            logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>,
            logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>,
            show_progress=True, callback=None)
```

Start training loop of online deep reinforcement learning.

Parameters

- **env** (*Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]*) – Gym-like environment.
- **buffer** (*Optional[d3rlpy.dataset.replay_buffer.ReplayBuffer]*) – Replay buffer.
- **explorer** (*Optional[d3rlpy.algos.qlearning.explorers.Explorer]*) – Action explorer.
- **n_steps** (*int*) – Number of total steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch.
- **update_interval** (*int*) – Number of steps per update.
- **update_start_step** (*int*) – Steps before starting updates.

- **random_steps** (*int*) – Steps for the initial random exploration.
- **eval_env** (*Optional[Union[gym.core.Env[Any, Any], gymnasium.core.Env[Any, Any]]]*) – Gym-like environment. If None, evaluation is skipped.
- **eval_epsilon** (*float*) – ϵ -greedy factor during evaluation.
- **save_interval** (*int*) – Number of epochs before saving models.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be {class name}_online_{timestamp}.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if logging_strategy is EPOCH.
- **logging_strategy** (*d3rlpy.constants.LoggingStrategy*) – Logging strategy to use.
- **logger_adapter** (*d3rlpy.logging.logger.LoggerAdapterFactory*) – LoggerAdapterFactory object.
- **show_progress** (*bool*) – Flag to show progress bar for iterations.
- **callback** (*Optional[Callable[[typing_extensions.Self, int, int], None]]*) – Callable function that takes (algo, epoch, total_step), which is called at the end of epochs.

Return type *None*

```
fitter(dataset, n_steps, n_steps_per_epoch=10000, logging_steps=500,  
       logging_strategy=<LoggingStrategy.EPOCH: 'epoch'>, experiment_name=None,  
       with_timestamp=True, logger_adapter=<d3rlpy.logging.file_adapter.FileAdapterFactory object>,  
       show_progress=True, save_interval=1, evaluators=None, callback=None, epoch_callback=None,  
       enable_ddp=False)
```

Iterate over epochs steps to train with the given dataset. At each iteration algo methods and properties can be changed or queried.

```
for epoch, metrics in algo.fitter(episodes):  
    my_plot(metrics)  
    algo.save_model(my_path)
```

Parameters

- **dataset** (*d3rlpy.dataset.replay_buffer.ReplayBuffer*) – Offline dataset to train.
- **n_steps** (*int*) – Number of steps to train.
- **n_steps_per_epoch** (*int*) – Number of steps per epoch. This value will be ignored when n_steps is None.
- **experiment_name** (*Optional[str]*) – Experiment name for logging. If not passed, the directory name will be {class name}_{timestamp}.
- **with_timestamp** (*bool*) – Flag to add timestamp string to the last of directory name.
- **logging_steps** (*int*) – Number of steps to log metrics. This will be ignored if logging_strategy is EPOCH.
- **logging_strategy** (*d3rlpy.constants.LoggingStrategy*) – Logging strategy to use.

- **logger_adapter** (`d3rlpy.logging.logger.LoggerAdapterFactory`) – Logger-AdapterFactory object.
- **show_progress** (`bool`) – Flag to show progress bar for iterations.
- **save_interval** (`int`) – Interval to save parameters.
- **evaluators** (`Optional[Dict[str, d3rlpy.metrics.evaluators.EvaluatorProtocol]]`) – List of evaluators.
- **callback** (`Optional[Callable[[typing_extensions.Self, int, int], None]]`) – Callable function that takes (algo, epoch, total_step), which is called every step.
- **epoch_callback** (`Optional[Callable[[typing_extensions.Self, int, int], None]]`) – Callable function that takes (algo, epoch, total_step), which is called at the end of every epoch.
- **enable_ddp** (`bool`) – Flag to wrap models with DataDistributedParallel.

Returns Iterator yielding current epoch and metrics dict.

Return type Generator[Tuple[int, Dict[str, float]], None, None]

classmethod from_json(*fname*, *device=False*)

Construct algorithm from params.json file.

```
from d3rlpy.algos import CQL

cql = CQL.from_json("<path-to-json>", device='cuda:0')
```

Parameters

- **fname** (`str`) – path to params.json
- **device** (`Union[int, str, bool]`) – device option. If the value is boolean and True, cuda:0 will be used. If the value is integer, cuda:<device> will be used. If the value is string in torch device style, the specified device will be used.

Returns algorithm object.

Return type typing_extensions.Self

get_action_type()

Returns action type (continuous or discrete).

Returns action type.

Return type d3rlpy.constants.ActionSpace

inner_create_impl(*observation_shape*, *action_size*)

Parameters

- **observation_shape** (`Union[Sequence[int], Sequence[Sequence[int]]]`) –
- **action_size** (`int`) –

Return type None

load_model(*fname*)

Load neural network parameters.

```
algo.load_model('model.pt')
```

Parameters **fname** (*str*) – source file path.

Return type *None*

predict(*x*)

Returns greedy actions.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

actions = algo.predict(x)
# actions.shape == (100, action size) for continuous control
# actions.shape == (100,) for discrete control
```

Parameters **x** (*Union*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]], *Sequence*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]]) – Observations

Returns Greedy actions

Return type *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]

predict_value(*x*, *action*)

Returns predicted action-values.

```
# 100 observations with shape of (10,)
x = np.random.random((100, 10))

# for continuous control
# 100 actions with shape of (2,)
actions = np.random.random((100, 2))

# for discrete control
# 100 actions in integer values
actions = np.random.randint(2, size=100)

values = algo.predict_value(x, actions)
# values.shape == (100,)
```

Parameters

- **x** (*Union*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]], *Sequence*[*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]]) – Observations
- **action** (*numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]) – Actions

Returns Predicted action-values

Return type *numpy.ndarray*[*Any*, *numpy.dtype*[*Any*]]

reset_optimizer_states()

Resets optimizer states.

This is especially useful when fine-tuning policies with setting initial optimizer states.

Return type *None*

sample_action(*x*)

Returns sampled actions.

The sampled actions are identical to the output of *predict* method if the policy is deterministic.

Parameters *x* (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]]`) – Observations.

Returns Sampled actions.

Return type `numpy.ndarray`[Any, `numpy.dtype`[Any]]

save(*fname*)

Saves paired data of neural network parameters and serialized config.

```
algo.save('model.d3')

# reconstruct everything
algo2 = d3rlpy.load_learnable("model.d3", device="cuda:0")
```

Parameters *fname* (`str`) – destination file path.

Return type `None`

save_model(*fname*)

Saves neural network parameters.

```
algo.save_model('model.pt')
```

Parameters *fname* (`str`) – destination file path.

Return type `None`

save_policy(*fname*)

Save the greedy-policy computational graph as TorchScript or ONNX.

The format will be automatically detected by the file name.

```
# save as TorchScript
algo.save_policy('policy.pt')

# save as ONNX
algo.save_policy('policy.onnx')
```

The artifacts saved with this method will work without d3rlpy. This method is especially useful to deploy the learned policy to production environments or embedding systems.

See also

- https://pytorch.org/tutorials/beginner/Intro_to_TorchScript_tutorial.html (for Python).
- https://pytorch.org/tutorials/advanced/cpp_export.html (for C++).
- <https://onnx.ai> (for ONNX)

Parameters *fname* (`str`) – Destination file path.

Return type `None`

set_grad_step(*grad_step*)

Set total gradient step counter.

This method can be used to restart the middle of training with an arbitrary gradient step counter, which has effects on periodic functions such as the target update.

Parameters **grad_step** (*int*) – total gradient step counter.

Return type *None*

update(*batch*)

Update parameters with mini-batch of data.

Parameters **batch** (*d3rlpy.dataset.mini_batch.TransitionMiniBatch*) – Mini-batch data.

Returns Dictionary of metrics.

Return type *Dict[str, float]*

Attributes**action_scaler**

Preprocessing action scaler.

Returns preprocessing action scaler.

Return type *Optional[ActionScaler]*

action_size

Action size.

Returns action size.

Return type *Optional[int]*

algo**batch_size**

Batch size to train.

Returns batch size.

Return type *int*

config

Config.

Returns config.

Return type *LearnableConfig*

gamma

Discount factor.

Returns discount factor.

Return type *float*

grad_step

Total gradient step counter.

This value will keep counting after `fit` and `fit_online` methods finish.

Returns total gradient step counter.

impl
Implementation object.
Returns implementation object.
Return type Optional[ImplBase]

observation_scaler
Preprocessing observation scaler.
Returns preprocessing observation scaler.
Return type Optional[ObservationScaler]

observation_shape
Observation shape.
Returns observation shape.
Return type Optional[Sequence[int]]

reward_scaler
Preprocessing reward scaler.
Returns preprocessing reward scaler.
Return type Optional[RewardScaler]

4.10 Logging

d3rlpy provides a customizable interface for logging metrics, `LoggerAdapter` and `LoggerAdapterFactory`.

```
import d3rlpy

dataset, env = d3rlpy.datasets.get_cartpole()

dqn = d3rlpy.algos.DQNConfig().create()

dqn.fit(
    dataset=dataset,
    n_steps=100000,
    # set FileAdapterFactory to save metrics as CSV files
    logger_adapter=d3rlpy.logging.FileAdapterFactory(root_dir="d3rlpy_logs"),
)
```

`LoggerAdapterFactory` is a parent interface that instantiates `LoggerAdapter` at the beginning of training. You can also use `CombineAdapter` to combine multiple `LoggerAdapter` in the same training.

```
# combine FileAdapterFactory and TensorboardAdapterFactory
logger_adapter = d3rlpy.logging.CombineAdapterFactory([
    d3rlpy.logging.FileAdapterFactory(root_dir="d3rlpy_logs"),
    d3rlpy.logging.TensorboardAdapterFactory(root_dir="tensorboard_logs"),
])

dqn.fit(dataset=dataset, n_steps=100000, logger_adapter=logger_adapter)
```

4.10.1 LoggerAdapter

LoggerAdapter is an inner interface of LoggerAdapterFactory. You can implement your own LoggerAdapter for 3rd-party visualizers.

```
import d3rlpy

class CustomAdapter(d3rlpy.logging.LoggerAdapter):
    def write_params(self, params: Dict[str, Any]) -> None:
        # save dictionary as json file
        with open("params.json", "w") as f:
            f.write(json.dumps(params, default=default_json_encoder, indent=2))

    def before_write_metric(self, epoch: int, step: int) -> None:
        pass

    def write_metric(
        self, epoch: int, step: int, name: str, value: float
    ) -> None:
        with open(f"{name}.csv", "a") as f:
            print(f"{epoch},{step},{value}", file=f)

    def after_write_metric(self, epoch: int, step: int) -> None:
        pass

    def save_model(self, epoch: int, algo: Any) -> None:
        algo.save(f"model_{epoch}.d3")

    def close(self) -> None:
        pass
```

<i>d3rlpy.logging.LoggerAdapter</i>	Interface of LoggerAdapter.
<i>d3rlpy.logging.FileAdapter</i>	FileAdapter class.
<i>d3rlpy.logging.TensorboardAdapter</i>	TensorboardAdapter class.
<i>d3rlpy.logging.WandBAdapter</i>	WandB Logger Adapter class.
<i>d3rlpy.logging.NoopAdapter</i>	NoopAdapter class.
<i>d3rlpy.logging.CombineAdapter</i>	CombineAdapter class.

d3rlpy.logging.LoggerAdapter

```
class d3rlpy.logging.LoggerAdapter(*args, **kwargs)
    Interface of LoggerAdapter.
```

Methods

after_write_metric(*epoch*, *step*)

Callback executed after write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

before_write_metric(*epoch*, *step*)

Callback executed before write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

close()

Closes this LoggerAdapter.

Return type *None*

save_model(*epoch*, *algo*)

Saves models.

Parameters

- **epoch** (*int*) – Epoch.
- **algo** (*d3rlpy.logging.logger.SaveProtocol*) – Algorithm that provides save method.

Return type *None*

write_metric(*epoch*, *step*, *name*, *value*)

Writes metric.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.
- **name** (*str*) – Metric name.
- **value** (*float*) – Metric value.

Return type *None*

write_params(*params*)

Writes hyperparameters.

Parameters **params** (*Dict[str, Any]*) – Dictionary of hyperparameters.

Return type *None*

d3rlpy.logging.FileAdapter

class d3rlpy.logging.FileAdapter(*logdir*)

FileAdapter class.

This class saves metrics as CSV files, hyperparameters as json file and models as d3 files.

Parameters **logdir** (*str*) – Log directory.

Methods

after_write_metric(*epoch, step*)

Callback executed after write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

before_write_metric(*epoch, step*)

Callback executed before write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

close()

Closes this LoggerAdapter.

Return type *None*

save_model(*epoch, algo*)

Saves models.

Parameters

- **epoch** (*int*) – Epoch.
- **algo** (*d3rlpy.logging.logger.SaveProtocol*) – Algorithm that provides save method.

Return type *None*

write_metric(*epoch, step, name, value*)

Writes metric.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.
- **name** (*str*) – Metric name.
- **value** (*float*) – Metric value.

Return type *None*

write_params(*params*)

Writes hyperparameters.

Parameters *params* (*Dict*[*str*, *Any*]) – Dictionary of hyperparameters.

Return type *None*

Attributes

logdir

d3rlpy.logging.TensorboardAdapter

class d3rlpy.logging.**TensorboardAdapter**(*root_dir*, *experiment_name*)

TensorboardAdapter class.

This class saves metrics for Tensorboard visualization, powered by tensorboardX.

Note that this class does not save models. If you want to save models during training, consider **FileAdapter** as well.

Parameters

- **root_dir** (*str*) – Top-level log directory.
- **experiment_name** (*str*) – Experiment name.

Methods

after_write_metric(*epoch*, *step*)

Callback executed after write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

before_write_metric(*epoch*, *step*)

Callback executed before write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

close()

Closes this LoggerAdapter.

Return type *None*

save_model(*epoch*, *algo*)

Saves models.

Parameters

- **epoch** (*int*) – Epoch.

- **algo** (*d3rlpy.logging.logger.SaveProtocol*) – Algorithm that provides save method.

Return type `None`

write_metric(*epoch, step, name, value*)

Writes metric.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.
- **name** (*str*) – Metric name.
- **value** (*float*) – Metric value.

Return type `None`

write_params(*params*)

Writes hyperparameters.

Parameters **params** (*Dict[str, Any]*) – Dictionary of hyperparameters.

Return type `None`

d3rlpy.logging.WanDBAdapter

class *d3rlpy.logging.WanDBAdapter*(*experiment_name, project=None*)

WandB Logger Adapter class.

This class logs data to Weights & Biases (WandB) for experiment tracking.

Parameters **experiment_name** (*str*) – Name of the experiment.

Methods

after_write_metric(*epoch, step*)

Callback executed after writing metric.

Parameters

- **epoch** (*int*) –
- **step** (*int*) –

Return type `None`

before_write_metric(*epoch, step*)

Callback executed before writing metric.

Parameters

- **epoch** (*int*) –
- **step** (*int*) –

Return type `None`

close()

Closes the logger and finishes the WandB run.

Return type `None`

save_model(*epoch*, *algo*)

Saves models to Weights & Biases.

Not implemented for WandB.

Parameters

- **epoch** (*int*) –
- **algo** (*d3rlpy.logging.logger.SaveProtocol*) –

Return type *None*

write_metric(*epoch*, *step*, *name*, *value*)

Writes metric to WandB.

Parameters

- **epoch** (*int*) –
- **step** (*int*) –
- **name** (*str*) –
- **value** (*float*) –

Return type *None*

write_params(*params*)

Writes hyperparameters to WandB config.

Parameters **params** (*Dict[str, Any]*) –

Return type *None*

d3rlpy.logging.NoopAdapter

class *d3rlpy.logging.NoopAdapter*(*args, **kwargs)

NoopAdapter class.

This class does not save anything. This can be used especially when programs are not allowed to write things to disks.

Methods

after_write_metric(*epoch*, *step*)

Callback executed after write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None*

before_write_metric(*epoch*, *step*)

Callback executed before write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type `None`

close()

Closes this LoggerAdapter.

Return type `None`

save_model(*epoch*, *algo*)

Saves models.

Parameters

- **epoch** (`int`) – Epoch.
- **algo** (`d3rlpy.logging.logger.SaveProtocol`) – Algorithm that provides save method.

Return type `None`

write_metric(*epoch*, *step*, *name*, *value*)

Writes metric.

Parameters

- **epoch** (`int`) – Epoch.
- **step** (`int`) – Training step.
- **name** (`str`) – Metric name.
- **value** (`float`) – Metric value.

Return type `None`

write_params(*params*)

Writes hyperparameters.

Parameters **params** (`Dict[str, Any]`) – Dictionary of hyperparameters.

Return type `None`

d3rlpy.logging.CombineAdapter

class `d3rlpy.logging.CombineAdapter`(*adapters*)

CombineAdapter class.

This class combines multiple LoggerAdapter to write metrics through different adapters at the same time.

Parameters **adapters** (`Sequence[LoggerAdapter]`) – List of LoggerAdapter.

Methods

after_write_metric(*epoch*, *step*)

Callback executed after write_metric method.

Parameters

- **epoch** (`int`) – Epoch.
- **step** (`int`) – Training step.

Return type `None`

before_write_metric(*epoch*, *step*)

Callback executed before write_metric method.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.

Return type *None***close()**

Closes this LoggerAdapter.

Return type *None***save_model**(*epoch, algo*)

Saves models.

Parameters

- **epoch** (*int*) – Epoch.
- **algo** (*d3rlpy.logging.logger.SaveProtocol*) – Algorithm that provides save method.

Return type *None***write_metric**(*epoch, step, name, value*)

Writes metric.

Parameters

- **epoch** (*int*) – Epoch.
- **step** (*int*) – Training step.
- **name** (*str*) – Metric name.
- **value** (*float*) – Metric value.

Return type *None***write_params**(*params*)

Writes hyperparameters.

Parameters **params** (*Dict[str, Any]*) – Dictionary of hyperparameters.**Return type** *None*

4.10.2 LoggerAdapterFactory

LoggerAdapterFactory is an interface that instantiates LoggerAdapter at the beginning of training. You can implement your own LoggerAdapterFactory for 3rd-party visualizers.

```
import d3rlpy

class CustomAdapterFactory(d3rlpy.logging.LoggerAdapterFactory):
    def create(self, experiment_name: str) -> d3rlpy.logging.FileAdapter:
        return CustomAdapter()
```

<i>d3rlpy.logging.LoggerAdapterFactory</i>	Interface of LoggerAdapterFactory.
<i>d3rlpy.logging.FileAdapterFactory</i>	FileAdapterFactory class.
<i>d3rlpy.logging.TensorboardAdapterFactory</i>	TensorboardAdapterFactory class.

continues on next page

Table 19 – continued from previous page

<code>d3rlpy.logging.WandBAdapterFactory</code>	WandB Logger Adapter Factory class.
<code>d3rlpy.logging.NoopAdapterFactory</code>	NoopAdapterFactory class.
<code>d3rlpy.logging.CombineAdapterFactory</code>	CombineAdapterFactory class.

d3rlpy.logging.LoggerAdapterFactory

class `d3rlpy.logging.LoggerAdapterFactory(*args, **kwargs)`
Interface of LoggerAdapterFactory.

Methods

create(*experiment_name*)
Creates LoggerAdapter.

This method instantiates `LoggerAdapter` with a given `experiment_name`. This method is usually called at the beginning of training.

Parameters `experiment_name` (*str*) – Experiment name.

Return type `d3rlpy.logging.logger.LoggerAdapter`

d3rlpy.logging.FileAdapterFactory

class `d3rlpy.logging.FileAdapterFactory(root_dir='d3rlpy_logs')`
FileAdapterFactory class.

This class instantiates `FileAdapter` object. Log directory will be created at `<root_dir>/<experiment_name>`.

Parameters `root_dir` (*str*) – Top-level log directory.

Methods

create(*experiment_name*)
Creates LoggerAdapter.

This method instantiates `LoggerAdapter` with a given `experiment_name`. This method is usually called at the beginning of training.

Parameters `experiment_name` (*str*) – Experiment name.

Return type `d3rlpy.logging.file_adapter.FileAdapter`

d3rlpy.logging.TensorboardAdapterFactory

class `d3rlpy.logging.TensorboardAdapterFactory(root_dir='tensorboard_logs')`
TensorboardAdapterFactory class.

This class instantiates `TensorboardAdapter` object.

Parameters `root_dir` (*str*) – Top-level log directory.

Methods

create(*experiment_name*)

Creates LoggerAdapter.

This method instantiates LoggerAdapter with a given `experiment_name`. This method is usually called at the beginning of training.

Parameters `experiment_name` (*str*) – Experiment name.

Return type *d3rlpy.logging.tensorboard_adapter.TensorboardAdapter*

d3rlpy.logging.WandBAdapterFactory

class d3rlpy.logging.WandBAdapterFactory(*project=None*)

WandB Logger Adapter Factory class.

This class creates instances of the WandB Logger Adapter for experiment tracking.

Methods

create(*experiment_name*)

Creates a WandB Logger Adapter instance.

Parameters `experiment_name` (*str*) – Name of the experiment.

Returns Instance of the WandB Logger Adapter.

Return type *d3rlpy.logging.logger.LoggerAdapter*

d3rlpy.logging.NoopAdapterFactory

class d3rlpy.logging.NoopAdapterFactory(**args*, ***kwargs*)

NoopAdapterFactory class.

This class instantiates NoopAdapter object.

Methods

create(*experiment_name*)

Creates LoggerAdapter.

This method instantiates LoggerAdapter with a given `experiment_name`. This method is usually called at the beginning of training.

Parameters `experiment_name` (*str*) – Experiment name.

Return type *d3rlpy.logging.noop_adapter.NoopAdapter*

d3rlpy.logging.CombineAdapterFactory

class d3rlpy.logging.CombineAdapterFactory(*adapter_factories*)
CombineAdapterFactory class.

This class instantiates CombineAdapter object.

Parameters **adapter_factories** (*Sequence[LoggerAdapterFactory]*) – List of LoggerAdapterFactory.

Methods

create(*experiment_name*)
Creates LoggerAdapter.

This method instantiates LoggerAdapter with a given *experiment_name*. This method is usually called at the beginning of training.

Parameters **experiment_name** (*str*) – Experiment name.

Return type *d3rlpy.logging.utils.CombineAdapter*

4.11 Online Training

d3rlpy provides not only offline training, but also online training utilities. Despite being designed for offline training algorithms, d3rlpy is flexible enough to be trained in an online manner with a few more utilities.

```
import d3rlpy
import gym

# setup environment
env = gym.make('CartPole-v1')
eval_env = gym.make('CartPole-v1')

# setup algorithm
dqn = d3rlpy.algos.DQN(
    batch_size=32,
    learning_rate=2.5e-4,
    target_update_interval=100,
).create(device="cuda:0")

# setup replay buffer
buffer = d3rlpy.dataset.create_fifo_replay_buffer(limit=1000000, env=env)

# setup explorers
explorer = d3rlpy.algos.LinearDecayEpsilonGreedy(
    start_epsilon=1.0,
    end_epsilon=0.1,
    duration=10000,
)

# start training
dqn.fit_online(
```

(continues on next page)

(continued from previous page)

```

env,
buffer,
explorer=explorer, # you don't need this with probabilistic policy algorithms
eval_env=eval_env,
n_steps=300000, # the number of total steps to train.
n_steps_per_epoch=1000,
update_interval=10, # update parameters every 10 steps.
)

```

4.11.1 Explorers

<code>d3rlpy.algos.ConstantEpsilonGreedy</code>	ϵ -greedy explorer with constant ϵ .
<code>d3rlpy.algos.LinearDecayEpsilonGreedy</code>	ϵ -greedy explorer with linear decay schedule.
<code>d3rlpy.algos.NormalNoise</code>	Normal noise explorer.

`d3rlpy.algos.ConstantEpsilonGreedy`

class `d3rlpy.algos.ConstantEpsilonGreedy(epsilon)`
 ϵ -greedy explorer with constant ϵ .

Parameters `epsilon` (*float*) – the constant ϵ .

Methods

sample(*algo*, *x*, *step*)

Parameters

- **algo** (`d3rlpy.interface.QLearningAlgoProtocol`) –
- **x** (`Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]`) –
- **step** (*int*) –

Return type `numpy.ndarray[Any, numpy.dtype[Any]]`

`d3rlpy.algos.LinearDecayEpsilonGreedy`

class `d3rlpy.algos.LinearDecayEpsilonGreedy(start_epsilon=1.0, end_epsilon=0.1, duration=1000000)`
 ϵ -greedy explorer with linear decay schedule.

Parameters

- **start_epsilon** (*float*) – Initial ϵ .
- **end_epsilon** (*float*) – Final ϵ .
- **duration** (*int*) – Scheduling duration.

Methods

compute_epsilon(*step*)

Returns decayed ϵ .

Returns ϵ .

Parameters *step* (*int*) –

Return type *float*

sample(*algo*, *x*, *step*)

Returns ϵ -greedy action.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Algorithm.
- **x** (*Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]*) – Observation.
- **step** (*int*) – Current environment step.

Returns ϵ -greedy action.

Return type *numpy.ndarray[Any, numpy.dtype[Any]]*

d3rlpy.algos.NormalNoise

class *d3rlpy.algos.NormalNoise*(*mean=0.0*, *std=0.1*)

Normal noise explorer.

Parameters

- **mean** (*float*) – Mean.
- **std** (*float*) – Standard deviation.

Methods

sample(*algo*, *x*, *step*)

Returns action with noise injection.

Parameters

- **algo** (*d3rlpy.interface.QLearningAlgoProtocol*) – Algorithm.
- **x** (*Union[numpy.ndarray[Any, numpy.dtype[Any]], Sequence[numpy.ndarray[Any, numpy.dtype[Any]]]*) – Observation.
- **step** (*int*) –

Returns Action with noise injection.

Return type *numpy.ndarray[Any, numpy.dtype[Any]]*

COMMAND LINE INTERFACE

d3rlpy provides the convenient CLI tool.

5.1 plot

Plot the saved metrics by specifying paths:


```
$ d3rlpy plot <path> [<path>...]
```

Table 1: options

option	description
--window	moving average window.
--show-steps	use iterations on x-axis.
--show-max	show maximum value.
--label	label in legend.
--xlim	limit on x-axis (tuple).
--ylim	limit on y-axis (tuple).
--title	title of the plot.
--save	flag to save the plot as an image.

example:

```
$ d3rlpy plot d3rlpy_logs/CQL_20201224224314/environment.csv
```

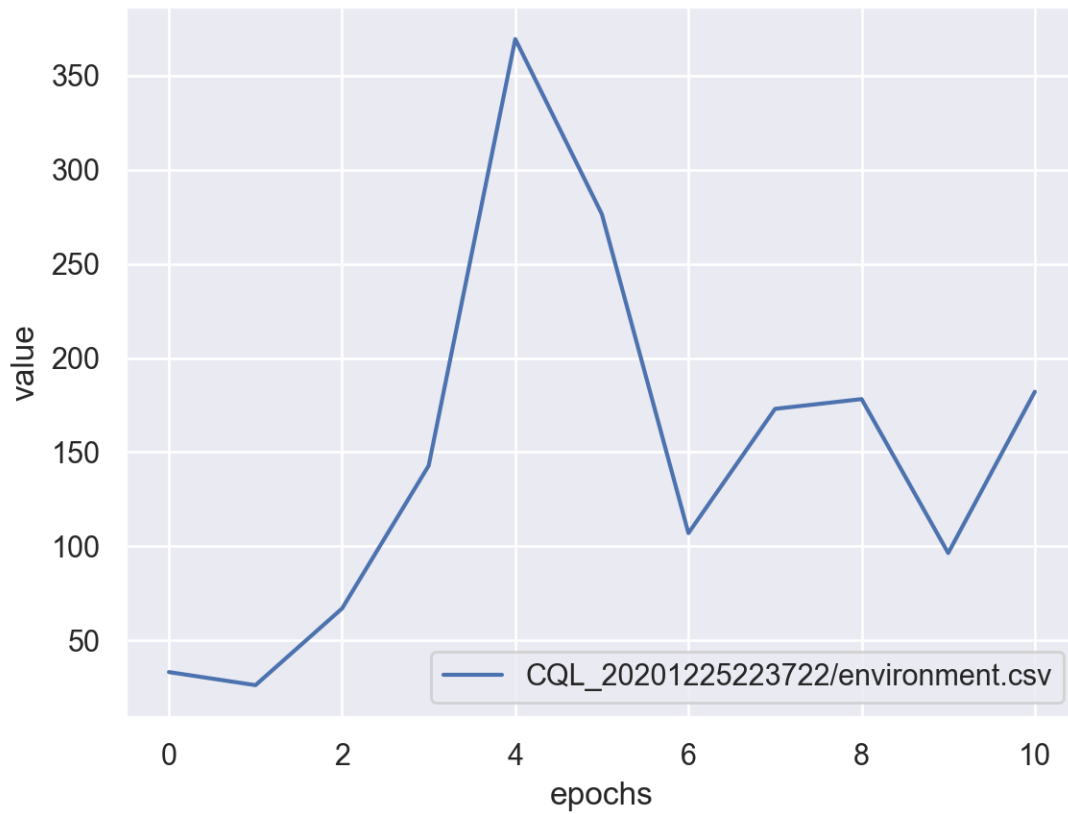


5.2 plot-all

Plot the all metrics saved in the directory:

```
$ d3rlpy plot-all <path>
```

example:

```
$ d3rlpy plot-all d3rlpy_logs/CQL_20201224224314
```

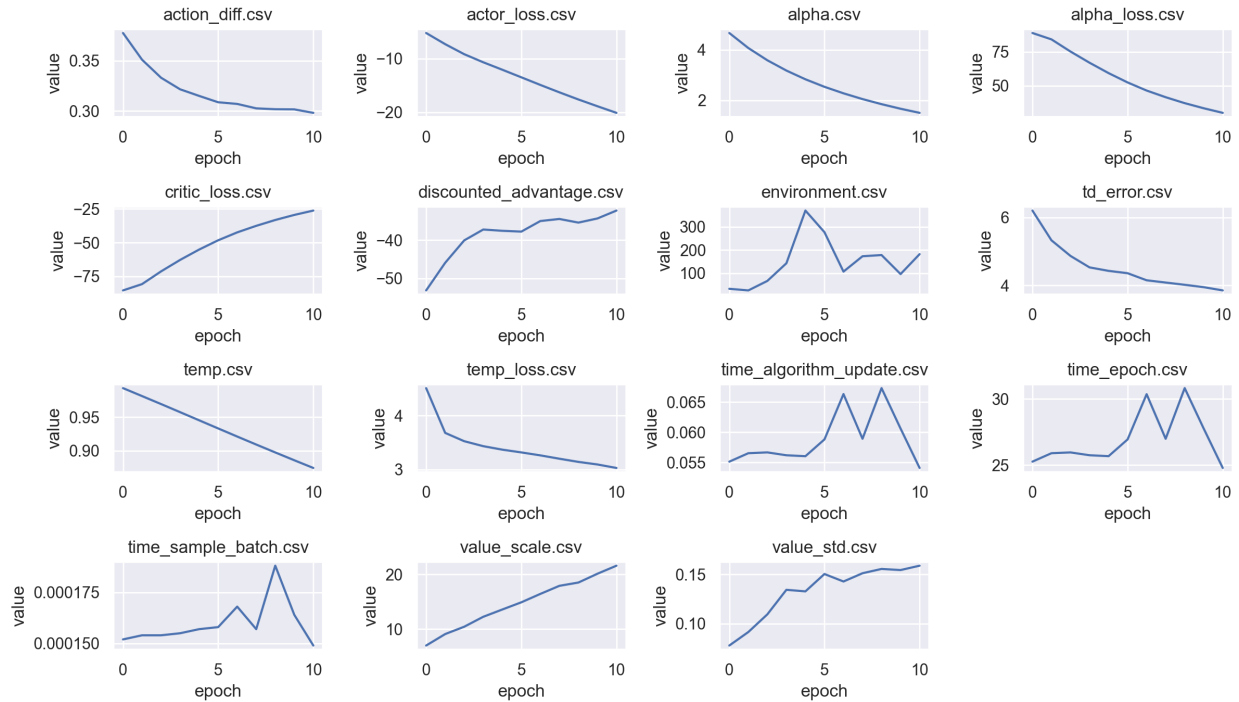

5.3 export

Export the saved model to the inference format, ONNX (.onnx) and TorchScript (.pt):

```
$ d3rlpy export <model_path> <out_path>
```

example:

```
$ d3rlpy export d3rlpy_logs/CQL_20201224224314/model_100.d3 policy.onnx
```

5.4 record

Record evaluation episodes as videos with the saved model:

```
$ d3rlpy record <path> --env-id <environment id>
```

Table 2: options

option	description
--env-id	Gym environment id.
--env-header	Arbitrary Python code to define environment to evaluate.
--out	Output directory.
--n-episodes	The number of episodes to record.
--epsilon	ϵ -greedy evaluation.
--target-return	The target environment return for Decision Transformer algorithms.

example:

```
# record simple environment
$ d3rlpy record d3rlpy_logs/CQL_20201224224314/model_100.d3 --env-id HopperBulletEnv-v0

# record wrapped environment
$ d3rlpy record d3rlpy_logs/Discrete_CQL_20201224224314/model_100.d3 \
  --env-header 'import gym; from d3rlpy.envs import Atari; env = Atari(gym.make(
  ↪ "BreakoutNoFrameskip-v4", render_mode="rgb_array"), is_eval=True)'
```

5.5 play

Run evaluation episodes with rendering:

```
$ d3rlpy play <path> --env-id <environment id>
```

Table 3: options

option	description
--env-id	Gym environment id.
--env-header	Arbitrary Python code to define environment to evaluate.
--n-episodes	The number of episodes to run.
--target-return	The target environment return for Decision Transformer algorithms.

example:

```
# record simple environment
$ d3rlpy play d3rlpy_logs/CQL_20201224224314/model_100.d3 --env-id HopperBulletEnv-v0

# record wrapped environment
$ d3rlpy play d3rlpy_logs/Discrete_CQL_20201224224314/model_100.d3 \
  --env-header 'import gym; from d3rlpy.envs import Atari; env = Atari(gym.make(
  ↪ "BreakoutNoFrameskip-v4", render_mode="human"), is_eval=True)'
```

5.6 install

Install additional packages:

```
$ d3rlpy install <name>
```

example:

```
# Install D4RL package
$ d3rlpy install d4rl
```

INSTALLATION

6.1 Recommended Platforms

d3rlpy supports Linux, macOS and also Windows.

6.2 Install d3rlpy

6.2.1 Install via PyPI

pip is a recommended way to install d3rlpy:

```
$ pip install d3rlpy
```

6.2.2 Install via Anaconda

d3rlpy is also available on *conda-forge*:

```
$ conda install -c conda-forge d3rlpy
```

6.2.3 Install via Docker

d3rlpy is also available on Docker Hub:

```
$ docker run -it --gpus all --name d3rlpy takuseno/d3rlpy:latest bash
```

6.2.4 Install from source

You can also install via GitHub repository:

```
$ git clone https://github.com/takuseno/d3rlpy
$ cd d3rlpy
$ pip install -e .
```


7.1 Reproducibility

Reproducibility is one of the most important things when doing research activity. Here is a simple example in d3rlpy.

```
import d3rlpy
import gym

# set random seeds in random module, numpy module and PyTorch module.
d3rlpy.seed(313)

# set environment seed
env = gym.make('Hopper-v2')
d3rlpy.envs.seed_env(env, 313)
```

7.2 Learning from image observation

d3rlpy supports both vector observations and image observations. There are several things you need to care about if you want to train RL agents from image observations.

```
import d3rlpy

# observation MUST be uint8 array, and the channel-first images
observations = np.random.randint(256, size=(100000, 1, 84, 84), dtype=np.uint8)
actions = np.random.randint(4, size=100000)
rewards = np.random.random(100000)
terminals = np.random.randint(2, size=100000)

dataset = d3rlpy.dataset.MDPDataset(
    observations=observations,
    actions=actions,
    rewards=rewards,
    terminals=terminals,
    # stack last 4 frames (stacked shape is [4, 84, 84])
    transition_picker=d3rlpy.dataset.FrameStackTransitionPicker(n_frames=4),
)

dqn = DQNConfig(
```

(continues on next page)

(continued from previous page)

```

    observation_scaler=d3rlpy.preprocessing.PixelObservationScaler(), # pixels are
    ↪divided by 255
).create()

```

7.3 Improve performance beyond the original paper

d3rlpy provides many options that you can use to improve performance potentially beyond the original paper. All the options are powerful, but the best combinations and hyperparameters are always dependent on the tasks.

```

import d3rlpy

# use batch normalization
# this seems to improve performance with discrete action-spaces
encoder = d3rlpy.models.DefaultEncoderFactory(use_batch_norm=True)
# use distributional Q function leading to robust improvement
q_func = d3rlpy.models.QRQFunctionFactory()
dqn = d3rlpy.algos.DQNConfig(
    encoder_factory=encoder,
    q_func_factory=q_func,
).create()

# use dropout
# this could dramatically improve performance
encoder = d3rlpy.models.DefaultEncoderFactory(dropout_rate=0.2)
sac = d3rlpy.algos.SACConfig(actor_encoder_factory=encoder).create()

# multi-step transition sampling
transition_picker = d3rlpy.dataset.MultiStepTransitionPicker(
    n_steps=3,
    gamma=0.99,
)
# replay buffer for experience replay
buffer = d3rlpy.dataset.create_fifo_replay_buffer(
    limit=1000000,
    env=env,
    transition_picker=transition_picker,
)

```

PAPER REPRODUCTIONS

For the experiment code, please take a look at [reproductions](#) directory.

All the experimental results are available in [d3rlpy-benchmarks](#) repository.

LICENSE**MIT License**

Copyright (c) 2021 Takuma Seno

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

PYTHON MODULE INDEX

d

- `d3rlpy`, [27](#)
- `d3rlpy.algos`, [210](#)
- `d3rlpy.dataset`, [87](#)
- `d3rlpy.datasets`, [114](#)
- `d3rlpy.logging`, [199](#)
- `d3rlpy.metrics`, [173](#)
- `d3rlpy.models`, [79](#)
- `d3rlpy.ope`, [179](#)
- `d3rlpy.preprocessing`, [118](#)

Symbols

<code>__call__()</code> (<i>d3rlpy.algos.GreedyTransformerActionSampler</i> method), 79	<code>__getitem__()</code> (<i>d3rlpy.dataset.FIFOBuffer</i> method), 104
<code>__call__()</code> (<i>d3rlpy.algos.SoftmaxTransformerActionSampler</i> method), 78	<code>__getitem__()</code> (<i>d3rlpy.dataset.InfiniteBuffer</i> method), 105
<code>__call__()</code> (<i>d3rlpy.algos.TransformerActionSampler</i> method), 78	<code>__len__()</code> (<i>d3rlpy.dataset.FIFOBuffer</i> method), 104
<code>__call__()</code> (<i>d3rlpy.dataset.BasicTrajectorySlicer</i> method), 110	<code>__len__()</code> (<i>d3rlpy.dataset.InfiniteBuffer</i> method), 104
<code>__call__()</code> (<i>d3rlpy.dataset.BasicTransitionPicker</i> method), 107	A
<code>__call__()</code> (<i>d3rlpy.dataset.FrameStackTrajectorySlicer</i> method), 111	<code>action_scaler</code> (<i>d3rlpy.base.LearnableBase</i> property), 27
<code>__call__()</code> (<i>d3rlpy.dataset.FrameStackTransitionPicker</i> method), 108	<code>action_scaler</code> (<i>d3rlpy.ope.DiscreteFQE</i> attribute), 198
<code>__call__()</code> (<i>d3rlpy.dataset.MultiStepTransitionPicker</i> method), 108	<code>action_scaler</code> (<i>d3rlpy.ope.FQE</i> attribute), 188
<code>__call__()</code> (<i>d3rlpy.dataset.TrajectorySlicerProtocol</i> method), 110	<code>action_size</code> (<i>d3rlpy.base.LearnableBase</i> property), 27
<code>__call__()</code> (<i>d3rlpy.dataset.TransitionPickerProtocol</i> method), 107	<code>action_size</code> (<i>d3rlpy.ope.DiscreteFQE</i> attribute), 198
<code>__call__()</code> (<i>d3rlpy.metrics.AverageValueEstimationEvaluator</i> method), 175	<code>action_size</code> (<i>d3rlpy.ope.FQE</i> attribute), 188
<code>__call__()</code> (<i>d3rlpy.metrics.CompareContinuousActionDiffEvaluator</i> method), 179	<code>activation</code> (<i>d3rlpy.models.DefaultEncoderFactory</i> attribute), 168
<code>__call__()</code> (<i>d3rlpy.metrics.CompareDiscreteActionMatchEvaluator</i> method), 179	<code>activation</code> (<i>d3rlpy.models.PixelEncoderFactory</i> attribute), 170
<code>__call__()</code> (<i>d3rlpy.metrics.ContinuousActionDiffEvaluator</i> method), 177	<code>activation</code> (<i>d3rlpy.models.VectorEncoderFactory</i> attribute), 173
<code>__call__()</code> (<i>d3rlpy.metrics.DiscountedSumOfAdvantageEvaluator</i> method), 175	<code>AdamFactory</code> (class in <i>d3rlpy.models</i>), 157
<code>__call__()</code> (<i>d3rlpy.metrics.DiscreteActionMatchEvaluator</i> method), 177	<code>after_write_metric()</code> (<i>d3rlpy.logging.CombineAdapter</i> method), 206
<code>__call__()</code> (<i>d3rlpy.metrics.EnvironmentEvaluator</i> method), 178	<code>after_write_metric()</code> (<i>d3rlpy.logging.FileAdapter</i> method), 202
<code>__call__()</code> (<i>d3rlpy.metrics.InitialStateValueEstimationEvaluator</i> method), 176	<code>after_write_metric()</code> (<i>d3rlpy.logging.LoggerAdapter</i> method), 201
<code>__call__()</code> (<i>d3rlpy.metrics.SoftOPCEvaluator</i> method), 176	<code>after_write_metric()</code> (<i>d3rlpy.logging.NoopAdapter</i> method), 205
<code>__call__()</code> (<i>d3rlpy.metrics.TDErrorEvaluator</i> method), 174	<code>after_write_metric()</code> (<i>d3rlpy.logging.TensorboardAdapter</i> method), 203
<code>__getitem__()</code> (<i>d3rlpy.dataset.BufferProtocol</i> method), 104	<code>after_write_metric()</code> (<i>d3rlpy.logging.WanDBAdapter</i> method), 204
	<code>algo</code> (<i>d3rlpy.ope.DiscreteFQE</i> attribute), 198
	<code>algo</code> (<i>d3rlpy.ope.FQE</i> attribute), 189
	<code>alpha</code> (<i>d3rlpy.models.RMSpropFactory</i> attribute), 161

- amsgrad (*d3rlpy.models.AdamFactory* attribute), 159
 amsgrad (*d3rlpy.models.GPTAdamWFactory* attribute), 163
 append() (*d3rlpy.dataset.BufferProtocol* method), 104
 append() (*d3rlpy.dataset.FIFOBuffer* method), 105
 append() (*d3rlpy.dataset.InfiniteBuffer* method), 104
 append() (*d3rlpy.dataset.MDPDataset* method), 88
 append() (*d3rlpy.dataset.MixedReplayBuffer* method), 100
 append() (*d3rlpy.dataset.ReplayBuffer* method), 96
 append() (*d3rlpy.dataset.ReplayBufferBase* method), 92
 append_episode() (*d3rlpy.dataset.MDPDataset* method), 88
 append_episode() (*d3rlpy.dataset.MixedReplayBuffer* method), 100
 append_episode() (*d3rlpy.dataset.ReplayBuffer* method), 96
 append_episode() (*d3rlpy.dataset.ReplayBufferBase* method), 92
 as_stateful_wrapper() (*d3rlpy.algos.TransformerAlgoBase* method), 72
 AverageValueEstimationEvaluator (class in *d3rlpy.metrics*), 175
 AWAC (class in *d3rlpy.algos*), 61
 AWACConfig (class in *d3rlpy.algos*), 60
- ## B
- BasicTrajectorySlicer (class in *d3rlpy.dataset*), 110
 BasicTransitionPicker (class in *d3rlpy.dataset*), 107
 BasicWriterPreprocess (class in *d3rlpy.dataset*), 113
 batch_size (*d3rlpy.base.LearnableBase* property), 27
 batch_size (*d3rlpy.ope.DiscreteFQE* attribute), 198
 batch_size (*d3rlpy.ope.FQE* attribute), 189
 BC (class in *d3rlpy.algos*), 37
 BCConfig (class in *d3rlpy.algos*), 36
 BCQ (class in *d3rlpy.algos*), 51
 BCQConfig (class in *d3rlpy.algos*), 49
 BEAR (class in *d3rlpy.algos*), 55
 BEARConfig (class in *d3rlpy.algos*), 53
 before_write_metric() (*d3rlpy.logging.CombineAdapter* method), 206
 before_write_metric() (*d3rlpy.logging.FileAdapter* method), 202
 before_write_metric() (*d3rlpy.logging.LoggerAdapter* method), 201
 before_write_metric() (*d3rlpy.logging.NoopAdapter* method), 205
 before_write_metric() (*d3rlpy.logging.TensorboardAdapter* method), 203
 before_write_metric() (*d3rlpy.logging.WandBAdapter* method), 204
 betas (*d3rlpy.models.AdamFactory* attribute), 159
 betas (*d3rlpy.models.GPTAdamWFactory* attribute), 163
 buffer (*d3rlpy.dataset.MDPDataset* attribute), 91
 buffer (*d3rlpy.dataset.MixedReplayBuffer* attribute), 102
 buffer (*d3rlpy.dataset.ReplayBuffer* attribute), 99
 buffer (*d3rlpy.dataset.ReplayBufferBase* attribute), 95
 BufferProtocol (class in *d3rlpy.dataset*), 104
 build_with_dataset() (*d3rlpy.base.LearnableBase* method), 28
 build_with_dataset() (*d3rlpy.ope.DiscreteFQE* method), 190
 build_with_dataset() (*d3rlpy.ope.FQE* method), 181
 build_with_env() (*d3rlpy.base.LearnableBase* method), 28
 build_with_env() (*d3rlpy.ope.DiscreteFQE* method), 190
 build_with_env() (*d3rlpy.ope.FQE* method), 181
 built (*d3rlpy.preprocessing.ClipRewardScaler* attribute), 143
 built (*d3rlpy.preprocessing.ConstantShiftRewardScaler* attribute), 152
 built (*d3rlpy.preprocessing.MinMaxActionScaler* attribute), 132
 built (*d3rlpy.preprocessing.MinMaxObservationScaler* attribute), 125
 built (*d3rlpy.preprocessing.MinMaxRewardScaler* attribute), 136
 built (*d3rlpy.preprocessing.MultiplyRewardScaler* attribute), 146
 built (*d3rlpy.preprocessing.PixelObservationScaler* attribute), 122
 built (*d3rlpy.preprocessing.ReturnBasedRewardScaler* attribute), 149
 built (*d3rlpy.preprocessing.StandardObservationScaler* attribute), 128
 built (*d3rlpy.preprocessing.StandardRewardScaler* attribute), 139
- ## C
- centered (*d3rlpy.models.RMSpropFactory* attribute), 161
 clip_episode() (*d3rlpy.dataset.MDPDataset* method), 88
 clip_episode() (*d3rlpy.dataset.MixedReplayBuffer* method), 100
 clip_episode() (*d3rlpy.dataset.ReplayBuffer* method), 97
 clip_episode() (*d3rlpy.dataset.ReplayBufferBase* method), 92

ClipRewardScaler (class in d3rlpy.preprocessing), 140
 close() (d3rlpy.logging.CombineAdapter method), 207
 close() (d3rlpy.logging.FileAdapter method), 202
 close() (d3rlpy.logging.LoggerAdapter method), 201
 close() (d3rlpy.logging.NoopAdapter method), 206
 close() (d3rlpy.logging.TensorboardAdapter method), 203
 close() (d3rlpy.logging.WanDBAdapter method), 204
 collect() (d3rlpy.algos.QLearningAlgoBase method), 30
 collect() (d3rlpy.ope.DiscreteFQE method), 190
 collect() (d3rlpy.ope.FQE method), 181
 CombineAdapter (class in d3rlpy.logging), 206
 CombineAdapterFactory (class in d3rlpy.logging), 210
 CompareContinuousActionDiffEvaluator (class in d3rlpy.metrics), 178
 CompareDiscreteActionMatchEvaluator (class in d3rlpy.metrics), 179
 compute_epsilon() (d3rlpy.algos.LinearDecayEpsilonGreedy method), 212
 config (d3rlpy.base.LearnableBase property), 28
 config (d3rlpy.ope.DiscreteFQE attribute), 198
 config (d3rlpy.ope.FQE attribute), 189
 ConstantEpsilonGreedy (class in d3rlpy.algos), 211
 ConstantShiftRewardScaler (class in d3rlpy.preprocessing), 149
 ContinuousActionDiffEvaluator (class in d3rlpy.metrics), 177
 copy_policy_from() (d3rlpy.algos.QLearningAlgoBase method), 30
 copy_policy_from() (d3rlpy.ope.DiscreteFQE method), 191
 copy_policy_from() (d3rlpy.ope.FQE method), 181
 copy_policy_optim_from() (d3rlpy.algos.QLearningAlgoBase method), 31
 copy_policy_optim_from() (d3rlpy.ope.DiscreteFQE method), 191
 copy_policy_optim_from() (d3rlpy.ope.FQE method), 181
 copy_q_function_from() (d3rlpy.algos.QLearningAlgoBase method), 31
 copy_q_function_from() (d3rlpy.ope.DiscreteFQE method), 191
 copy_q_function_from() (d3rlpy.ope.FQE method), 182
 copy_q_function_optim_from() (d3rlpy.algos.QLearningAlgoBase method), 31
 copy_q_function_optim_from() (d3rlpy.ope.DiscreteFQE method), 192
 copy_q_function_optim_from() (d3rlpy.ope.FQE method), 182
 CQL (class in d3rlpy.algos), 59
 CQLConfig (class in d3rlpy.algos), 57
 create() (d3rlpy.algos.AWACConfig method), 61
 create() (d3rlpy.algos.BCConfig method), 37
 create() (d3rlpy.algos.BCQConfig method), 50
 create() (d3rlpy.algos.BEARConfig method), 54
 create() (d3rlpy.algos.CQLConfig method), 58
 create() (d3rlpy.algos.CRRConfig method), 56
 create() (d3rlpy.algos.DDPGConfig method), 43
 create() (d3rlpy.algos.DecisionTransformerConfig method), 75
 create() (d3rlpy.algos.DiscreteBCConfig method), 38
 create() (d3rlpy.algos.DiscreteBCQConfig method), 52
 create() (d3rlpy.algos.DiscreteCQLConfig method), 60
 create() (d3rlpy.algos.DiscreteDecisionTransformerConfig method), 76
 create() (d3rlpy.algos.DiscreteRandomPolicyConfig method), 70
 create() (d3rlpy.algos.DiscreteSACConfig method), 48
 create() (d3rlpy.algos.DoubleDQNConfig method), 42
 create() (d3rlpy.algos.DQNConfig method), 40
 create() (d3rlpy.algos.IQLConfig method), 67
 create() (d3rlpy.algos.NFQConfig method), 39
 create() (d3rlpy.algos.PLASConfig method), 63
 create() (d3rlpy.algos.PLASWithPerturbationConfig method), 64
 create() (d3rlpy.algos.RandomPolicyConfig method), 68
 create() (d3rlpy.algos.SACConfig method), 46
 create() (d3rlpy.algos.TD3Config method), 44
 create() (d3rlpy.algos.TD3PlusBCConfig method), 66
 create() (d3rlpy.logging.CombineAdapterFactory method), 210
 create() (d3rlpy.logging.FileAdapterFactory method), 208
 create() (d3rlpy.logging.LoggerAdapterFactory method), 208
 create() (d3rlpy.logging.NoopAdapterFactory method), 209
 create() (d3rlpy.logging.TensorboardAdapterFactory method), 209
 create() (d3rlpy.logging.WanDBAdapterFactory method), 209
 create() (d3rlpy.models.AdamFactory method), 157
 create() (d3rlpy.models.DefaultEncoderFactory method), 166
 create() (d3rlpy.models.GPTAdamWFactory method), 161
 create() (d3rlpy.models.OptimizerFactory method), 153
 create() (d3rlpy.models.PixelEncoderFactory method), 168
 create() (d3rlpy.models.RMSpropFactory method), 159
 create() (d3rlpy.models.SGDFactory method), 155
 create() (d3rlpy.models.VectorEncoderFactory method), 171
 create_continuous()

(*d3rlpy.models.IQNQFunctionFactory* method), 85
 create_continuous() (*d3rlpy.models.MeanQFunctionFactory* method), 80
 create_continuous() (*d3rlpy.models.QRQFunctionFactory* method), 82
 create_discrete() (*d3rlpy.models.IQNQFunctionFactory* method), 85
 create_discrete() (*d3rlpy.models.MeanQFunctionFactory* method), 80
 create_discrete() (*d3rlpy.models.QRQFunctionFactory* method), 82
 create_fifo_replay_buffer() (in module *d3rlpy.dataset*), 103
 create_impl() (*d3rlpy.base.LearnableBase* method), 28
 create_impl() (*d3rlpy.ope.DiscreteFQE* method), 192
 create_impl() (*d3rlpy.ope.FQE* method), 182
 create_infinite_replay_buffer() (in module *d3rlpy.dataset*), 102
 create_with_action() (*d3rlpy.models.DefaultEncoderFactory* method), 166
 create_with_action() (*d3rlpy.models.PixelEncoderFactory* method), 168
 create_with_action() (*d3rlpy.models.VectorEncoderFactory* method), 171
 CRR (class in *d3rlpy.algos*), 57
 CRRConfig (class in *d3rlpy.algos*), 55
D
 d3rlpy module, 27
 d3rlpy.algos module, 27, 210
 d3rlpy.dataset module, 87
 d3rlpy.datasets module, 114
 d3rlpy.logging module, 199
 d3rlpy.metrics module, 173
 d3rlpy.models module, 79, 152, 163
 d3rlpy.ope module, 179
 d3rlpy.preprocessing module, 118
 dampening (*d3rlpy.models.SGDFactory* attribute), 156
 dataset_info (*d3rlpy.dataset.MDPDataset* attribute), 91
 dataset_info (*d3rlpy.dataset.MixedReplayBuffer* attribute), 102
 dataset_info (*d3rlpy.dataset.ReplayBuffer* attribute), 99
 dataset_info (*d3rlpy.dataset.ReplayBufferBase* attribute), 95
 DDPG (class in *d3rlpy.algos*), 43
 DDPGConfig (class in *d3rlpy.algos*), 42
 DecisionTransformer (class in *d3rlpy.algos*), 75
 DecisionTransformerConfig (class in *d3rlpy.algos*), 74
 DefaultEncoderFactory (class in *d3rlpy.models*), 165
 deserialize() (*d3rlpy.models.AdamFactory* class method), 157
 deserialize() (*d3rlpy.models.DefaultEncoderFactory* class method), 166
 deserialize() (*d3rlpy.models.GPTAdamWFactory* class method), 162
 deserialize() (*d3rlpy.models.IQNQFunctionFactory* class method), 85
 deserialize() (*d3rlpy.models.MeanQFunctionFactory* class method), 80
 deserialize() (*d3rlpy.models.OptimizerFactory* class method), 153
 deserialize() (*d3rlpy.models.PixelEncoderFactory* class method), 168
 deserialize() (*d3rlpy.models.QRQFunctionFactory* class method), 83
 deserialize() (*d3rlpy.models.RMSpropFactory* class method), 159
 deserialize() (*d3rlpy.models.SGDFactory* class method), 155
 deserialize() (*d3rlpy.models.VectorEncoderFactory* class method), 171
 deserialize() (*d3rlpy.preprocessing.ClipRewardScaler* class method), 140
 deserialize() (*d3rlpy.preprocessing.ConstantShiftRewardScaler* class method), 149
 deserialize() (*d3rlpy.preprocessing.MinMaxActionScaler* class method), 130
 deserialize() (*d3rlpy.preprocessing.MinMaxObservationScaler* class method), 123
 deserialize() (*d3rlpy.preprocessing.MinMaxRewardScaler* class method), 134
 deserialize() (*d3rlpy.preprocessing.MultiplyRewardScaler* class method), 143
 deserialize() (*d3rlpy.preprocessing.PixelObservationScaler* class method), 119
 deserialize() (*d3rlpy.preprocessing.ReturnBasedRewardScaler* class method), 146
 deserialize() (*d3rlpy.preprocessing.StandardObservationScaler* class method), 126

<code>deserialize()</code> (<i>d3rlpy.preprocessing.StandardRewardScaler</i> class method), 137	<code>deserialize()</code> (<i>d3rlpy.preprocessing.PixelObservationScaler</i> class method), 119
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.AdamFactory</i> class method), 157	<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.ReturnBasedRewardScaler</i> class method), 146
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.DefaultEncoderFactory</i> class method), 166	<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.StandardObservationScaler</i> class method), 126
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.GPTAdamWFactory</i> class method), 162	<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.StandardRewardScaler</i> class method), 137
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.IQNQFunctionFactory</i> class method), 85	<code>deserialize_from_file()</code> (<i>d3rlpy.models.AdamFactory</i> class method), 157
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.MeanQFunctionFactory</i> class method), 80	<code>deserialize_from_file()</code> (<i>d3rlpy.models.DefaultEncoderFactory</i> class method), 166
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.OptimizerFactory</i> class method), 153	<code>deserialize_from_file()</code> (<i>d3rlpy.models.GPTAdamWFactory</i> class method), 162
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.PixelEncoderFactory</i> class method), 169	<code>deserialize_from_file()</code> (<i>d3rlpy.models.IQNQFunctionFactory</i> class method), 85
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.QRQFunctionFactory</i> class method), 83	<code>deserialize_from_file()</code> (<i>d3rlpy.models.MeanQFunctionFactory</i> class method), 80
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.RMSpropFactory</i> class method), 159	<code>deserialize_from_file()</code> (<i>d3rlpy.models.OptimizerFactory</i> class method), 153
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.SGDFactory</i> class method), 155	<code>deserialize_from_file()</code> (<i>d3rlpy.models.PixelEncoderFactory</i> class method), 169
<code>deserialize_from_dict()</code> (<i>d3rlpy.models.VectorEncoderFactory</i> class method), 171	<code>deserialize_from_file()</code> (<i>d3rlpy.models.QRQFunctionFactory</i> class method), 83
<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.ClipRewardScaler</i> class method), 140	<code>deserialize_from_file()</code> (<i>d3rlpy.models.RMSpropFactory</i> class method), 160
<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.ConstantShiftRewardScaler</i> class method), 149	<code>deserialize_from_file()</code> (<i>d3rlpy.models.SGDFactory</i> class method), 155
<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.MinMaxActionScaler</i> class method), 130	<code>deserialize_from_file()</code> (<i>d3rlpy.models.VectorEncoderFactory</i> class method), 171
<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.MinMaxObservationScaler</i> class method), 123	<code>deserialize_from_file()</code> (<i>d3rlpy.preprocessing.ClipRewardScaler</i> class method), 140
<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.MinMaxRewardScaler</i> class method), 134	<code>deserialize_from_file()</code> (<i>d3rlpy.preprocessing.ConstantShiftRewardScaler</i> class method), 150
<code>deserialize_from_dict()</code> (<i>d3rlpy.preprocessing.MultiplyRewardScaler</i> class method), 143	<code>deserialize_from_file()</code> (<i>d3rlpy.preprocessing.MinMaxActionScaler</i> class method), 130
<code>deserialize_from_dict()</code>	<code>deserialize_from_file()</code>

- (*d3rlpy.preprocessing.MinMaxObservationScaler* class method), 123
- deserialize_from_file()* (*d3rlpy.preprocessing.MinMaxRewardScaler* class method), 134
- deserialize_from_file()* (*d3rlpy.preprocessing.MultiplyRewardScaler* class method), 143
- deserialize_from_file()* (*d3rlpy.preprocessing.PixelObservationScaler* class method), 120
- deserialize_from_file()* (*d3rlpy.preprocessing.ReturnBasedRewardScaler* class method), 147
- deserialize_from_file()* (*d3rlpy.preprocessing.StandardObservationScaler* class method), 126
- deserialize_from_file()* (*d3rlpy.preprocessing.StandardRewardScaler* class method), 137
- DiscountedSumOfAdvantageEvaluator* (class in *d3rlpy.metrics*), 174
- DiscreteActionMatchEvaluator* (class in *d3rlpy.metrics*), 177
- DiscreteBC* (class in *d3rlpy.algos*), 38
- DiscreteBCConfig* (class in *d3rlpy.algos*), 37
- DiscreteBCQ* (class in *d3rlpy.algos*), 52
- DiscreteBCQConfig* (class in *d3rlpy.algos*), 51
- DiscreteCQL* (class in *d3rlpy.algos*), 60
- DiscreteCQLConfig* (class in *d3rlpy.algos*), 59
- DiscreteDecisionTransformer* (class in *d3rlpy.algos*), 76
- DiscreteDecisionTransformerConfig* (class in *d3rlpy.algos*), 75
- DiscreteFQE* (class in *d3rlpy.ope*), 190
- DiscreteRandomPolicy* (class in *d3rlpy.algos*), 70
- DiscreteRandomPolicyConfig* (class in *d3rlpy.algos*), 70
- DiscreteSAC* (class in *d3rlpy.algos*), 48
- DiscreteSACConfig* (class in *d3rlpy.algos*), 47
- DoubleDQN* (class in *d3rlpy.algos*), 42
- DoubleDQNConfig* (class in *d3rlpy.algos*), 41
- DQN* (class in *d3rlpy.algos*), 40
- DQNConfig* (class in *d3rlpy.algos*), 40
- dropout_rate* (*d3rlpy.models.DefaultEncoderFactory* attribute), 168
- dropout_rate* (*d3rlpy.models.PixelEncoderFactory* attribute), 170
- dropout_rate* (*d3rlpy.models.VectorEncoderFactory* attribute), 173
- dump()* (*d3rlpy.dataset.MDPDataset* method), 89
- dump()* (*d3rlpy.dataset.MixedReplayBuffer* method), 100
- dump()* (*d3rlpy.dataset.ReplayBuffer* method), 97
- dump()* (*d3rlpy.dataset.ReplayBufferBase* method), 93
- embed_size* (*d3rlpy.models.IQNQFunctionFactory* attribute), 87
- EnvironmentEvaluator* (class in *d3rlpy.metrics*), 178
- episodes* (*d3rlpy.dataset.BufferProtocol* attribute), 104
- episodes* (*d3rlpy.dataset.FIFOBuffer* attribute), 106
- episodes* (*d3rlpy.dataset.InfiniteBuffer* attribute), 105
- episodes* (*d3rlpy.dataset.MDPDataset* attribute), 91
- episodes* (*d3rlpy.dataset.MixedReplayBuffer* attribute), 102
- episodes* (*d3rlpy.dataset.ReplayBuffer* attribute), 99
- episodes* (*d3rlpy.dataset.ReplayBufferBase* attribute), 95
- eps* (*d3rlpy.models.AdamFactory* attribute), 159
- eps* (*d3rlpy.models.GPTAdamWFactory* attribute), 163
- eps* (*d3rlpy.models.RMSpropFactory* attribute), 161
- eps* (*d3rlpy.preprocessing.StandardObservationScaler* attribute), 128
- eps* (*d3rlpy.preprocessing.StandardRewardScaler* attribute), 139
- exclude_last_activation* (*d3rlpy.models.PixelEncoderFactory* attribute), 170
- exclude_last_activation* (*d3rlpy.models.VectorEncoderFactory* attribute), 173
- ## F
- feature_size* (*d3rlpy.models.PixelEncoderFactory* attribute), 170
- FIFOBuffer* (class in *d3rlpy.dataset*), 105
- FileAdapter* (class in *d3rlpy.logging*), 202
- FileAdapterFactory* (class in *d3rlpy.logging*), 208
- fit()* (*d3rlpy.algos.QLearningAlgoBase* method), 32
- fit()* (*d3rlpy.algos.TransformerAlgoBase* method), 72
- fit()* (*d3rlpy.ope.DiscreteFQE* method), 192
- fit()* (*d3rlpy.ope.FQE* method), 183
- fit_online()* (*d3rlpy.algos.QLearningAlgoBase* method), 33
- fit_online()* (*d3rlpy.ope.DiscreteFQE* method), 193
- fit_online()* (*d3rlpy.ope.FQE* method), 183
- fit_with_env()* (*d3rlpy.preprocessing.ClipRewardScaler* method), 140
- fit_with_env()* (*d3rlpy.preprocessing.ConstantShiftRewardScaler* method), 150
- fit_with_env()* (*d3rlpy.preprocessing.MinMaxActionScaler* method), 130
- fit_with_env()* (*d3rlpy.preprocessing.MinMaxObservationScaler* method), 123
- fit_with_env()* (*d3rlpy.preprocessing.MinMaxRewardScaler* method), 134
- fit_with_env()* (*d3rlpy.preprocessing.MultiplyRewardScaler* method), 143

`fit_with_env()` (`d3rlpy.preprocessing.PixelObservationScaler` method), 120
`fit_with_env()` (`d3rlpy.preprocessing.ReturnBasedRewardScaler` method), 147
`fit_with_env()` (`d3rlpy.preprocessing.StandardObservationScaler` method), 126
`fit_with_env()` (`d3rlpy.preprocessing.StandardRewardScaler` method), 137
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.ClipRewardScaler` method), 140
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.ConstantShiftRewardScaler` method), 150
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.MinMaxActionScaler` method), 130
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.MinMaxObservationScaler` method), 123
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.MinMaxRewardScaler` method), 134
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.MultiplyRewardScaler` method), 143
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.PixelObservationScaler` method), 120
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.ReturnBasedRewardScaler` method), 147
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.StandardObservationScaler` method), 126
`fit_with_trajectory_slicer()` (`d3rlpy.preprocessing.StandardRewardScaler` method), 137
`fit_with_transition_picker()` (`d3rlpy.preprocessing.ClipRewardScaler` method), 141
`fit_with_transition_picker()` (`d3rlpy.preprocessing.ConstantShiftRewardScaler` method), 150
`fit_with_transition_picker()` (`d3rlpy.preprocessing.MinMaxActionScaler` method), 130
`fit_with_transition_picker()` (`d3rlpy.preprocessing.MinMaxObservationScaler` method), 123
`fit_with_transition_picker()` (`d3rlpy.preprocessing.MinMaxRewardScaler` method), 134
`fit_with_transition_picker()` (`d3rlpy.preprocessing.MultiplyRewardScaler` method), 144
`fit_with_transition_picker()` (`d3rlpy.preprocessing.PixelObservationScaler` method), 120
`fit_with_transition_picker()` (`d3rlpy.preprocessing.ReturnBasedRewardScaler` method), 147
`fit_with_transition_picker()` (`d3rlpy.preprocessing.StandardObservationScaler` method), 126
`fit_with_transition_picker()` (`d3rlpy.preprocessing.StandardRewardScaler` method), 137
`fitter()` (`d3rlpy.algos.QLearningAlgoBase` method), 33
`fitter()` (`d3rlpy.ope.DiscreteFQE` method), 194
`fitter()` (`d3rlpy.ope.FQE` method), 184
`FQE` (class in `d3rlpy.ope`), 180
`FrameStackTrajectorySlicer` (class in `d3rlpy.dataset`), 111
`FrameStackTransitionPicker` (class in `d3rlpy.dataset`), 107
`from_dict()` (`d3rlpy.models.AdamFactory` class method), 157
`from_dict()` (`d3rlpy.models.DefaultEncoderFactory` class method), 166
`from_dict()` (`d3rlpy.models.GPTAdamWFactory` class method), 162
`from_dict()` (`d3rlpy.models.IQNQFunctionFactory` class method), 85
`from_dict()` (`d3rlpy.models.MeanQFunctionFactory` class method), 80
`from_dict()` (`d3rlpy.models.OptimizerFactory` class method), 153
`from_dict()` (`d3rlpy.models.PixelEncoderFactory` class method), 169
`from_dict()` (`d3rlpy.models.QRQFunctionFactory` class method), 83
`from_dict()` (`d3rlpy.models.RMSpropFactory` class method), 160
`from_dict()` (`d3rlpy.models.SGDFactory` class method), 155
`from_dict()` (`d3rlpy.models.VectorEncoderFactory` class method), 171
`from_dict()` (`d3rlpy.preprocessing.ClipRewardScaler` class method), 141
`from_dict()` (`d3rlpy.preprocessing.ConstantShiftRewardScaler` class method), 150
`from_dict()` (`d3rlpy.preprocessing.MinMaxActionScaler` class method), 130
`from_dict()` (`d3rlpy.preprocessing.MinMaxObservationScaler` class method), 123
`from_dict()` (`d3rlpy.preprocessing.MinMaxRewardScaler` class method), 134
`from_dict()` (`d3rlpy.preprocessing.MultiplyRewardScaler` class method), 144

class method), 134
 from_dict() (d3rlpy.preprocessing.MultiplyRewardScaler class method), 144
 from_dict() (d3rlpy.preprocessing.PixelObservationScaler class method), 120
 from_dict() (d3rlpy.preprocessing.ReturnBasedRewardScaler class method), 147
 from_dict() (d3rlpy.preprocessing.StandardObservationScaler class method), 126
 from_dict() (d3rlpy.preprocessing.StandardRewardScaler class method), 138
 from_episode_generator()
 (d3rlpy.dataset.MDPDataset class method), 89
 from_episode_generator()
 (d3rlpy.dataset.MixedReplayBuffer class method), 100
 from_episode_generator()
 (d3rlpy.dataset.ReplayBuffer class method), 97
 from_episode_generator()
 (d3rlpy.dataset.ReplayBufferBase class method), 93
 from_json() (d3rlpy.base.LearnableBase class method), 28
 from_json() (d3rlpy.models.AdamFactory class method), 157
 from_json() (d3rlpy.models.DefaultEncoderFactory class method), 166
 from_json() (d3rlpy.models.GPTAdamWFactory class method), 162
 from_json() (d3rlpy.models.IQNQFunctionFactory class method), 85
 from_json() (d3rlpy.models.MeanQFunctionFactory class method), 81
 from_json() (d3rlpy.models.OptimizerFactory class method), 153
 from_json() (d3rlpy.models.PixelEncoderFactory class method), 169
 from_json() (d3rlpy.models.QRQFunctionFactory class method), 83
 from_json() (d3rlpy.models.RMSpropFactory class method), 160
 from_json() (d3rlpy.models.SGDFactory class method), 155
 from_json() (d3rlpy.models.VectorEncoderFactory class method), 171
 from_json() (d3rlpy.ope.DiscreteFQE class method), 195
 from_json() (d3rlpy.ope.FQE class method), 185
 from_json() (d3rlpy.preprocessing.ClipRewardScaler class method), 141
 from_json() (d3rlpy.preprocessing.ConstantShiftRewardScaler class method), 150
 from_json() (d3rlpy.preprocessing.MinMaxActionScaler class method), 130
 from_json() (d3rlpy.preprocessing.MinMaxObservationScaler class method), 123
 from_json() (d3rlpy.preprocessing.MinMaxRewardScaler class method), 134
 from_json() (d3rlpy.preprocessing.MultiplyRewardScaler class method), 144
 from_json() (d3rlpy.preprocessing.PixelObservationScaler class method), 120
 from_json() (d3rlpy.preprocessing.ReturnBasedRewardScaler class method), 147
 from_json() (d3rlpy.preprocessing.StandardObservationScaler class method), 127
 from_json() (d3rlpy.preprocessing.StandardRewardScaler class method), 138

G

gamma (d3rlpy.base.LearnableBase property), 28
 gamma (d3rlpy.ope.DiscreteFQE attribute), 198
 gamma (d3rlpy.ope.FQE attribute), 189
 get_action_type() (d3rlpy.algos.AWAC method), 61
 get_action_type() (d3rlpy.algos.BC method), 37
 get_action_type() (d3rlpy.algos.BCQ method), 51
 get_action_type() (d3rlpy.algos.BEAR method), 55
 get_action_type() (d3rlpy.algos.CQL method), 59
 get_action_type() (d3rlpy.algos.CRR method), 57
 get_action_type() (d3rlpy.algos.DDPG method), 43
 get_action_type() (d3rlpy.algos.DecisionTransformer method), 75
 get_action_type() (d3rlpy.algos.DiscreteBC method), 38
 get_action_type() (d3rlpy.algos.DiscreteBCQ method), 52
 get_action_type() (d3rlpy.algos.DiscreteCQL method), 60
 get_action_type() (d3rlpy.algos.DiscreteDecisionTransformer method), 77
 get_action_type() (d3rlpy.algos.DiscreteRandomPolicy method), 70
 get_action_type() (d3rlpy.algos.DiscreteSAC method), 48
 get_action_type() (d3rlpy.algos.DQN method), 41
 get_action_type() (d3rlpy.algos.IQL method), 68
 get_action_type() (d3rlpy.algos.NFQ method), 39
 get_action_type() (d3rlpy.algos.PLAS method), 63
 get_action_type() (d3rlpy.algos.RandomPolicy method), 68
 get_action_type() (d3rlpy.algos.SAC method), 47
 get_action_type() (d3rlpy.algos.TD3 method), 45
 get_action_type() (d3rlpy.algos.TD3PlusBC method), 66
 get_action_type() (d3rlpy.base.LearnableBase method), 28
 get_action_type() (d3rlpy.ope.DiscreteFQE method), 195

- [get_action_type\(\)](#) (*d3rlpy.ope.FQE* method), 186
[get_atari\(\)](#) (in module *d3rlpy.datasets*), 115
[get_atari_transitions\(\)](#) (in module *d3rlpy.datasets*), 116
[get_cartpole\(\)](#) (in module *d3rlpy.datasets*), 114
[get_d4rl\(\)](#) (in module *d3rlpy.datasets*), 116
[get_dataset\(\)](#) (in module *d3rlpy.datasets*), 117
[get_minari\(\)](#) (in module *d3rlpy.datasets*), 118
[get_pendulum\(\)](#) (in module *d3rlpy.datasets*), 115
[get_type\(\)](#) (*d3rlpy.models.AdamFactory* static method), 158
[get_type\(\)](#) (*d3rlpy.models.DefaultEncoderFactory* static method), 166
[get_type\(\)](#) (*d3rlpy.models.GPTAdamWFactory* static method), 162
[get_type\(\)](#) (*d3rlpy.models.IQNQFunctionFactory* static method), 86
[get_type\(\)](#) (*d3rlpy.models.MeanQFunctionFactory* static method), 81
[get_type\(\)](#) (*d3rlpy.models.OptimizerFactory* static method), 153
[get_type\(\)](#) (*d3rlpy.models.PixelEncoderFactory* static method), 169
[get_type\(\)](#) (*d3rlpy.models.QRQFunctionFactory* static method), 83
[get_type\(\)](#) (*d3rlpy.models.RMSpropFactory* static method), 160
[get_type\(\)](#) (*d3rlpy.models.SGDFactory* static method), 155
[get_type\(\)](#) (*d3rlpy.models.VectorEncoderFactory* static method), 171
[get_type\(\)](#) (*d3rlpy.preprocessing.ClipRewardScaler* static method), 141
[get_type\(\)](#) (*d3rlpy.preprocessing.ConstantShiftRewardScaler* static method), 150
[get_type\(\)](#) (*d3rlpy.preprocessing.MinMaxActionScaler* static method), 131
[get_type\(\)](#) (*d3rlpy.preprocessing.MinMaxObservationScaler* static method), 124
[get_type\(\)](#) (*d3rlpy.preprocessing.MinMaxRewardScaler* static method), 135
[get_type\(\)](#) (*d3rlpy.preprocessing.MultiplyRewardScaler* static method), 144
[get_type\(\)](#) (*d3rlpy.preprocessing.PixelObservationScaler* static method), 120
[get_type\(\)](#) (*d3rlpy.preprocessing.ReturnBasedRewardScaler* static method), 147
[get_type\(\)](#) (*d3rlpy.preprocessing.StandardObservationScaler* static method), 127
[get_type\(\)](#) (*d3rlpy.preprocessing.StandardRewardScaler* static method), 138
[GPTAdamWFactory](#) (class in *d3rlpy.models*), 161
[grad_step](#) (*d3rlpy.base.LearnableBase* property), 29
[grad_step](#) (*d3rlpy.ope.DiscreteFQE* attribute), 198
[grad_step](#) (*d3rlpy.ope.FQE* attribute), 189
[GreedyTransformerActionSampler](#) (class in *d3rlpy.algos*), 78
- ## H
- [high](#) (*d3rlpy.preprocessing.ClipRewardScaler* attribute), 143
- ## I
- [impl](#) (*d3rlpy.base.LearnableBase* property), 29
[impl](#) (*d3rlpy.ope.DiscreteFQE* attribute), 198
[impl](#) (*d3rlpy.ope.FQE* attribute), 189
[InfiniteBuffer](#) (class in *d3rlpy.dataset*), 104
[InitialStateValueEstimationEvaluator](#) (class in *d3rlpy.metrics*), 175
[inner_create_impl\(\)](#) (*d3rlpy.ope.DiscreteFQE* method), 195
[inner_create_impl\(\)](#) (*d3rlpy.ope.FQE* method), 186
[IQL](#) (class in *d3rlpy.algos*), 68
[IQLConfig](#) (class in *d3rlpy.algos*), 66
[IQNQFunctionFactory](#) (class in *d3rlpy.models*), 84
- ## L
- [last_activation](#) (*d3rlpy.models.PixelEncoderFactory* attribute), 170
[last_activation](#) (*d3rlpy.models.VectorEncoderFactory* attribute), 173
[LastFrameWriterPreprocess](#) (class in *d3rlpy.dataset*), 113
[LearnableBase](#) (class in *d3rlpy.base*), 27
[LinearDecayEpsilonGreedy](#) (class in *d3rlpy.algos*), 211
[load\(\)](#) (*d3rlpy.dataset.MDPDataset* class method), 89
[load\(\)](#) (*d3rlpy.dataset.MixedReplayBuffer* class method), 101
[load\(\)](#) (*d3rlpy.dataset.ReplayBuffer* class method), 97
[load\(\)](#) (*d3rlpy.dataset.ReplayBufferBase* class method), 93
[load_model\(\)](#) (*d3rlpy.base.LearnableBase* method), 29
[load_model\(\)](#) (*d3rlpy.ope.DiscreteFQE* method), 195
[load_model\(\)](#) (*d3rlpy.ope.FQE* method), 186
[logdir](#) (*d3rlpy.logging.FileAdapter* attribute), 203
[LoggerAdapter](#) (class in *d3rlpy.logging*), 200
[LoggerAdapterFactory](#) (class in *d3rlpy.logging*), 208
[low](#) (*d3rlpy.preprocessing.ClipRewardScaler* attribute), 143
- ## M
- [maximum](#) (*d3rlpy.preprocessing.MinMaxActionScaler* attribute), 132
[maximum](#) (*d3rlpy.preprocessing.MinMaxObservationScaler* attribute), 125
[maximum](#) (*d3rlpy.preprocessing.MinMaxRewardScaler* attribute), 136

- MDPDataSet (class in *d3rlpy.dataset*), 88
- mean (*d3rlpy.preprocessing.StandardObservationScaler* attribute), 128
- mean (*d3rlpy.preprocessing.StandardRewardScaler* attribute), 139
- MeanQFunctionFactory (class in *d3rlpy.models*), 79
- minimum (*d3rlpy.preprocessing.MinMaxActionScaler* attribute), 132
- minimum (*d3rlpy.preprocessing.MinMaxObservationScaler* attribute), 125
- minimum (*d3rlpy.preprocessing.MinMaxRewardScaler* attribute), 136
- MinMaxActionScaler (class in *d3rlpy.preprocessing*), 129
- MinMaxObservationScaler (class in *d3rlpy.preprocessing*), 122
- MinMaxRewardScaler (class in *d3rlpy.preprocessing*), 133
- MixedReplayBuffer (class in *d3rlpy.dataset*), 99
- module
- d3rlpy*, 27
 - d3rlpy.algos*, 27, 210
 - d3rlpy.dataset*, 87
 - d3rlpy.datasets*, 114
 - d3rlpy.logging*, 199
 - d3rlpy.metrics*, 173
 - d3rlpy.models*, 79, 152, 163
 - d3rlpy.ope*, 179
 - d3rlpy.preprocessing*, 118
- momentum (*d3rlpy.models.RMSpropFactory* attribute), 161
- momentum (*d3rlpy.models.SGDFactory* attribute), 156
- multiplier (*d3rlpy.preprocessing.ClipRewardScaler* attribute), 143
- multiplier (*d3rlpy.preprocessing.MinMaxRewardScaler* attribute), 136
- multiplier (*d3rlpy.preprocessing.MultiplyRewardScaler* attribute), 146
- multiplier (*d3rlpy.preprocessing.ReturnBasedRewardScaler* attribute), 149
- multiplier (*d3rlpy.preprocessing.StandardRewardScaler* attribute), 139
- MultiplyRewardScaler (class in *d3rlpy.preprocessing*), 143
- MultiStepTransitionPicker (class in *d3rlpy.dataset*), 108
- N**
- n_greedy_quantiles (*d3rlpy.models.IQNQFunctionFactory* attribute), 87
- n_quantiles (*d3rlpy.models.IQNQFunctionFactory* attribute), 87
- n_quantiles (*d3rlpy.models.QRQFunctionFactory* attribute), 84
- nesterov (*d3rlpy.models.SGDFactory* attribute), 156
- NFQ (class in *d3rlpy.algos*), 39
- NFQConfig (class in *d3rlpy.algos*), 38
- NoopAdapter (class in *d3rlpy.logging*), 205
- NoopAdapterFactory (class in *d3rlpy.logging*), 209
- NormalNoise (class in *d3rlpy.algos*), 212
- O**
- observation_scaler (*d3rlpy.base.LearnableBase* property), 29
- observation_scaler (*d3rlpy.ope.DiscreteFQE* attribute), 199
- observation_scaler (*d3rlpy.ope.FQE* attribute), 189
- observation_shape (*d3rlpy.base.LearnableBase* property), 29
- observation_shape (*d3rlpy.ope.DiscreteFQE* attribute), 199
- observation_shape (*d3rlpy.ope.FQE* attribute), 189
- OptimizerFactory (class in *d3rlpy.models*), 153
- P**
- PixelEncoderFactory (class in *d3rlpy.models*), 168
- PixelObservationScaler (class in *d3rlpy.preprocessing*), 119
- PLAS (class in *d3rlpy.algos*), 63
- PLASConfig (class in *d3rlpy.algos*), 62
- PLASWithPerturbation (class in *d3rlpy.algos*), 65
- PLASWithPerturbationConfig (class in *d3rlpy.algos*), 63
- predict() (*d3rlpy.algos.DiscreteRandomPolicy* method), 70
- predict() (*d3rlpy.algos.QLearningAlgoBase* method), 34
- predict() (*d3rlpy.algos.RandomPolicy* method), 69
- predict() (*d3rlpy.algos.TransformerAlgoBase* method), 73
- predict() (*d3rlpy.ope.DiscreteFQE* method), 196
- predict() (*d3rlpy.ope.FQE* method), 186
- predict_value() (*d3rlpy.algos.DiscreteRandomPolicy* method), 71
- predict_value() (*d3rlpy.algos.QLearningAlgoBase* method), 35
- predict_value() (*d3rlpy.algos.RandomPolicy* method), 69
- predict_value() (*d3rlpy.ope.DiscreteFQE* method), 196
- predict_value() (*d3rlpy.ope.FQE* method), 186
- primary_replay_buffer (*d3rlpy.dataset.MixedReplayBuffer* attribute), 102
- process_action() (*d3rlpy.dataset.BasicWriterPreprocess* method), 113
- process_action() (*d3rlpy.dataset.LastFrameWriterPreprocess* method), 113

process_action() (*d3rlpy.dataset.WriterPreprocessProtocol* method), 112
 process_observation() (*d3rlpy.dataset.BasicWriterPreprocess* method), 113
 process_observation() (*d3rlpy.dataset.LastFrameWriterPreprocess* method), 113
 process_observation() (*d3rlpy.dataset.WriterPreprocessProtocol* method), 112
 process_reward() (*d3rlpy.dataset.BasicWriterPreprocess* method), 113
 process_reward() (*d3rlpy.dataset.LastFrameWriterPreprocess* method), 114
 process_reward() (*d3rlpy.dataset.WriterPreprocessProtocol* method), 112

Q

QLearningAlgoBase (class in *d3rlpy.algos*), 30
 QRQFunctionFactory (class in *d3rlpy.models*), 82

R

RandomPolicy (class in *d3rlpy.algos*), 68
 RandomPolicyConfig (class in *d3rlpy.algos*), 68
 ReplayBuffer (class in *d3rlpy.dataset*), 95
 ReplayBufferBase (class in *d3rlpy.dataset*), 92
 reset_optimizer_states() (*d3rlpy.algos.QLearningAlgoBase* method), 35
 reset_optimizer_states() (*d3rlpy.ope.DiscreteFQE* method), 196
 reset_optimizer_states() (*d3rlpy.ope.FQE* method), 187
 return_max (*d3rlpy.preprocessing.ReturnBasedRewardScaler* attribute), 149
 return_min (*d3rlpy.preprocessing.ReturnBasedRewardScaler* attribute), 149
 ReturnBasedRewardScaler (class in *d3rlpy.preprocessing*), 146
 reverse_transform() (*d3rlpy.preprocessing.ClipRewardScaler* method), 141
 reverse_transform() (*d3rlpy.preprocessing.ConstantShiftRewardScaler* method), 150
 reverse_transform() (*d3rlpy.preprocessing.MinMaxActionScaler* method), 131
 reverse_transform() (*d3rlpy.preprocessing.MinMaxObservationScaler* method), 124
 reverse_transform() (*d3rlpy.preprocessing.MinMaxRewardScaler* method), 135
 reverse_transform() (*d3rlpy.preprocessing.MultiplyRewardScaler* method), 144
 reverse_transform() (*d3rlpy.preprocessing.PixelObservationScaler* method), 120
 reverse_transform() (*d3rlpy.preprocessing.ReturnBasedRewardScaler* method), 147
 reverse_transform() (*d3rlpy.preprocessing.StandardObservationScaler* method), 127
 reverse_transform() (*d3rlpy.preprocessing.StandardRewardScaler* method), 138
 reverse_transform_numpy() (*d3rlpy.preprocessing.ClipRewardScaler* method), 141
 reverse_transform_numpy() (*d3rlpy.preprocessing.ConstantShiftRewardScaler* method), 151
 reverse_transform_numpy() (*d3rlpy.preprocessing.MinMaxActionScaler* method), 131
 reverse_transform_numpy() (*d3rlpy.preprocessing.MinMaxObservationScaler* method), 124
 reverse_transform_numpy() (*d3rlpy.preprocessing.MinMaxRewardScaler* method), 135
 reverse_transform_numpy() (*d3rlpy.preprocessing.MultiplyRewardScaler* method), 144
 reverse_transform_numpy() (*d3rlpy.preprocessing.PixelObservationScaler* method), 121
 reverse_transform_numpy() (*d3rlpy.preprocessing.ReturnBasedRewardScaler* method), 148
 reverse_transform_numpy() (*d3rlpy.preprocessing.StandardObservationScaler* method), 127
 reverse_transform_numpy() (*d3rlpy.preprocessing.StandardRewardScaler* method), 138
 reward_scaler (*d3rlpy.base.LearnableBase* property), 29
 reward_scaler (*d3rlpy.ope.DiscreteFQE* attribute), 199
 reward_scaler (*d3rlpy.ope.FQE* attribute), 189
 RMSpropFactory (class in *d3rlpy.models*), 159

S

SAC (class in *d3rlpy.algos*), 46
 SACConfig (class in *d3rlpy.algos*), 45

- `sample()` (*d3rlpy.algos.ConstantEpsilonGreedy method*), 211
`sample()` (*d3rlpy.algos.LinearDecayEpsilonGreedy method*), 212
`sample()` (*d3rlpy.algos.NormalNoise method*), 212
`sample_action()` (*d3rlpy.algos.DiscreteRandomPolicy method*), 71
`sample_action()` (*d3rlpy.algos.QLearningAlgoBase method*), 35
`sample_action()` (*d3rlpy.algos.RandomPolicy method*), 69
`sample_action()` (*d3rlpy.ope.DiscreteFQE method*), 196
`sample_action()` (*d3rlpy.ope.FQE method*), 187
`sample_trajectory()` (*d3rlpy.dataset.MDPDataset method*), 90
`sample_trajectory()` (*d3rlpy.dataset.MixedReplayBuffer method*), 101
`sample_trajectory()` (*d3rlpy.dataset.ReplayBuffer method*), 98
`sample_trajectory()` (*d3rlpy.dataset.ReplayBufferBase method*), 94
`sample_trajectory_batch()` (*d3rlpy.dataset.MDPDataset method*), 90
`sample_trajectory_batch()` (*d3rlpy.dataset.MixedReplayBuffer method*), 101
`sample_trajectory_batch()` (*d3rlpy.dataset.ReplayBuffer method*), 98
`sample_trajectory_batch()` (*d3rlpy.dataset.ReplayBufferBase method*), 94
`sample_transition()` (*d3rlpy.dataset.MDPDataset method*), 90
`sample_transition()` (*d3rlpy.dataset.MixedReplayBuffer method*), 101
`sample_transition()` (*d3rlpy.dataset.ReplayBuffer method*), 98
`sample_transition()` (*d3rlpy.dataset.ReplayBufferBase method*), 94
`sample_transition_batch()` (*d3rlpy.dataset.MDPDataset method*), 90
`sample_transition_batch()` (*d3rlpy.dataset.MixedReplayBuffer method*), 101
`sample_transition_batch()` (*d3rlpy.dataset.ReplayBuffer method*), 98
`sample_transition_batch()` (*d3rlpy.dataset.ReplayBufferBase method*), 94
`save()` (*d3rlpy.base.LearnableBase method*), 29
`save()` (*d3rlpy.ope.DiscreteFQE method*), 197
`save()` (*d3rlpy.ope.FQE method*), 187
`save_model()` (*d3rlpy.base.LearnableBase method*), 29
`save_model()` (*d3rlpy.logging.CombineAdapter method*), 207
`save_model()` (*d3rlpy.logging.FileAdapter method*), 202
`save_model()` (*d3rlpy.logging.LoggerAdapter method*), 201
`save_model()` (*d3rlpy.logging.NoopAdapter method*), 206
`save_model()` (*d3rlpy.logging.TensorboardAdapter method*), 203
`save_model()` (*d3rlpy.logging.WanDBAdapter method*), 204
`save_model()` (*d3rlpy.ope.DiscreteFQE method*), 197
`save_model()` (*d3rlpy.ope.FQE method*), 187
`save_policy()` (*d3rlpy.algos.QLearningAlgoBase method*), 36
`save_policy()` (*d3rlpy.ope.DiscreteFQE method*), 197
`save_policy()` (*d3rlpy.ope.FQE method*), 188
`schema()` (*d3rlpy.models.AdamFactory class method*), 158
`schema()` (*d3rlpy.models.DefaultEncoderFactory class method*), 167
`schema()` (*d3rlpy.models.GPTAdamWFactory class method*), 162
`schema()` (*d3rlpy.models.IQNQFunctionFactory class method*), 86
`schema()` (*d3rlpy.models.MeanQFunctionFactory class method*), 81
`schema()` (*d3rlpy.models.OptimizerFactory class method*), 153
`schema()` (*d3rlpy.models.PixelEncoderFactory class method*), 169
`schema()` (*d3rlpy.models.QRQFunctionFactory class method*), 83
`schema()` (*d3rlpy.models.RMSpropFactory class method*), 160
`schema()` (*d3rlpy.models.SGDFactory class method*), 155
`schema()` (*d3rlpy.models.VectorEncoderFactory class method*), 172
`schema()` (*d3rlpy.preprocessing.ClipRewardScaler class method*), 141
`schema()` (*d3rlpy.preprocessing.ConstantShiftRewardScaler class method*), 151
`schema()` (*d3rlpy.preprocessing.MinMaxActionScaler class method*), 131
`schema()` (*d3rlpy.preprocessing.MinMaxObservationScaler class method*), 124
`schema()` (*d3rlpy.preprocessing.MinMaxRewardScaler class method*), 135

<code>schema()</code> (<code>d3rlpy.preprocessing.MultiplyRewardScaler</code> class method), 144	<code>serialize_to_dict()</code> (<code>d3rlpy.models.AdamFactory</code> method), 158
<code>schema()</code> (<code>d3rlpy.preprocessing.PixelObservationScaler</code> class method), 121	<code>serialize_to_dict()</code> (<code>d3rlpy.models.DefaultEncoderFactory</code> method), 167
<code>schema()</code> (<code>d3rlpy.preprocessing.ReturnBasedRewardScaler</code> class method), 148	<code>serialize_to_dict()</code> (<code>d3rlpy.models.GPTAdamWFactory</code> method), 162
<code>schema()</code> (<code>d3rlpy.preprocessing.StandardObservationScaler</code> class method), 127	<code>serialize_to_dict()</code> (<code>d3rlpy.models.IQNQFunctionFactory</code> method), 86
<code>schema()</code> (<code>d3rlpy.preprocessing.StandardRewardScaler</code> class method), 138	<code>serialize_to_dict()</code> (<code>d3rlpy.models.MeanQFunctionFactory</code> method), 81
<code>secondary_replay_buffer</code> (<code>d3rlpy.dataset.MixedReplayBuffer</code> attribute), 102	<code>serialize_to_dict()</code> (<code>d3rlpy.models.OptimizerFactory</code> method), 154
<code>serialize()</code> (<code>d3rlpy.models.AdamFactory</code> method), 158	<code>serialize_to_dict()</code> (<code>d3rlpy.models.PixelEncoderFactory</code> method), 169
<code>serialize()</code> (<code>d3rlpy.models.DefaultEncoderFactory</code> method), 167	<code>serialize_to_dict()</code> (<code>d3rlpy.models.QRQFunctionFactory</code> method), 83
<code>serialize()</code> (<code>d3rlpy.models.GPTAdamWFactory</code> method), 162	<code>serialize_to_dict()</code> (<code>d3rlpy.models.RMSpropFactory</code> method), 160
<code>serialize()</code> (<code>d3rlpy.models.IQNQFunctionFactory</code> method), 86	<code>serialize_to_dict()</code> (<code>d3rlpy.models.SGDFactory</code> method), 156
<code>serialize()</code> (<code>d3rlpy.models.MeanQFunctionFactory</code> method), 81	<code>serialize_to_dict()</code> (<code>d3rlpy.models.VectorEncoderFactory</code> method), 172
<code>serialize()</code> (<code>d3rlpy.models.OptimizerFactory</code> method), 154	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.ClipRewardScaler</code> method), 142
<code>serialize()</code> (<code>d3rlpy.models.PixelEncoderFactory</code> method), 169	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.ConstantShiftRewardScaler</code> method), 151
<code>serialize()</code> (<code>d3rlpy.models.QRQFunctionFactory</code> method), 83	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.MinMaxActionScaler</code> method), 131
<code>serialize()</code> (<code>d3rlpy.models.RMSpropFactory</code> method), 160	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.MinMaxObservationScaler</code> method), 124
<code>serialize()</code> (<code>d3rlpy.models.SGDFactory</code> method), 156	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.MinMaxRewardScaler</code> method), 135
<code>serialize()</code> (<code>d3rlpy.models.VectorEncoderFactory</code> method), 172	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.MultiplyRewardScaler</code> method), 145
<code>serialize()</code> (<code>d3rlpy.preprocessing.ClipRewardScaler</code> method), 142	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.PixelObservationScaler</code> method), 121
<code>serialize()</code> (<code>d3rlpy.preprocessing.ConstantShiftRewardScaler</code> method), 151	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.ReturnBasedRewardScaler</code> method), 148
<code>serialize()</code> (<code>d3rlpy.preprocessing.MinMaxActionScaler</code> method), 131	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.StandardObservationScaler</code> method), 127
<code>serialize()</code> (<code>d3rlpy.preprocessing.MinMaxObservationScaler</code> method), 124	<code>serialize_to_dict()</code> (<code>d3rlpy.preprocessing.StandardRewardScaler</code> method), 138
<code>serialize()</code> (<code>d3rlpy.preprocessing.MinMaxRewardScaler</code> method), 135	
<code>serialize()</code> (<code>d3rlpy.preprocessing.MultiplyRewardScaler</code> method), 145	
<code>serialize()</code> (<code>d3rlpy.preprocessing.PixelObservationScaler</code> method), 121	
<code>serialize()</code> (<code>d3rlpy.preprocessing.ReturnBasedRewardScaler</code> method), 148	
<code>serialize()</code> (<code>d3rlpy.preprocessing.StandardObservationScaler</code> method), 127	
<code>serialize()</code> (<code>d3rlpy.preprocessing.StandardRewardScaler</code> method), 138	

`method`), 148
`serialize_to_dict()` (`d3rlpy.preprocessing.StandardObservationScaler` `method`), 127
`serialize_to_dict()` (`d3rlpy.preprocessing.StandardRewardScaler` `method`), 138
`set_grad_step()` (`d3rlpy.base.LearnableBase` `method`), 30
`set_grad_step()` (`d3rlpy.ope.DiscreteFQE` `method`), 197
`set_grad_step()` (`d3rlpy.ope.FQE` `method`), 188
`SGDFactory` (`class` in `d3rlpy.models`), 154
`share_encoder` (`d3rlpy.models.IQNQFunctionFactory` `attribute`), 87
`share_encoder` (`d3rlpy.models.MeanQFunctionFactory` `attribute`), 82
`share_encoder` (`d3rlpy.models.QRQFunctionFactory` `attribute`), 84
`size()` (`d3rlpy.dataset.MDPDataset` `method`), 90
`size()` (`d3rlpy.dataset.MixedReplayBuffer` `method`), 102
`size()` (`d3rlpy.dataset.ReplayBuffer` `method`), 98
`size()` (`d3rlpy.dataset.ReplayBufferBase` `method`), 94
`SoftmaxTransformerActionSampler` (`class` in `d3rlpy.algos`), 78
`SoftOPCEvaluator` (`class` in `d3rlpy.metrics`), 176
`StandardObservationScaler` (`class` in `d3rlpy.preprocessing`), 125
`StandardRewardScaler` (`class` in `d3rlpy.preprocessing`), 136
`std` (`d3rlpy.preprocessing.StandardObservationScaler` `attribute`), 128
`std` (`d3rlpy.preprocessing.StandardRewardScaler` `attribute`), 139

T

`TD3` (`class` in `d3rlpy.algos`), 45
`TD3Config` (`class` in `d3rlpy.algos`), 43
`TD3PlusBC` (`class` in `d3rlpy.algos`), 66
`TD3PlusBCConfig` (`class` in `d3rlpy.algos`), 65
`TDErrorEvaluator` (`class` in `d3rlpy.metrics`), 174
`TensorboardAdapter` (`class` in `d3rlpy.logging`), 203
`TensorboardAdapterFactory` (`class` in `d3rlpy.logging`), 208
`to_dict()` (`d3rlpy.models.AdamFactory` `method`), 158
`to_dict()` (`d3rlpy.models.DefaultEncoderFactory` `method`), 167
`to_dict()` (`d3rlpy.models.GPTAdamWFactory` `method`), 162
`to_dict()` (`d3rlpy.models.IQNQFunctionFactory` `method`), 86
`to_dict()` (`d3rlpy.models.MeanQFunctionFactory` `method`), 81
`to_dict()` (`d3rlpy.models.OptimizerFactory` `method`), 154
`to_dict()` (`d3rlpy.models.PixelEncoderFactory` `method`), 169
`to_dict()` (`d3rlpy.models.QRQFunctionFactory` `method`), 84
`to_dict()` (`d3rlpy.models.RMSpropFactory` `method`), 160
`to_dict()` (`d3rlpy.models.SGDFactory` `method`), 156
`to_dict()` (`d3rlpy.models.VectorEncoderFactory` `method`), 172
`to_dict()` (`d3rlpy.preprocessing.ClipRewardScaler` `method`), 142
`to_dict()` (`d3rlpy.preprocessing.ConstantShiftRewardScaler` `method`), 151
`to_dict()` (`d3rlpy.preprocessing.MinMaxActionScaler` `method`), 131
`to_dict()` (`d3rlpy.preprocessing.MinMaxObservationScaler` `method`), 124
`to_dict()` (`d3rlpy.preprocessing.MinMaxRewardScaler` `method`), 135
`to_dict()` (`d3rlpy.preprocessing.MultiplyRewardScaler` `method`), 145
`to_dict()` (`d3rlpy.preprocessing.PixelObservationScaler` `method`), 121
`to_dict()` (`d3rlpy.preprocessing.ReturnBasedRewardScaler` `method`), 148
`to_dict()` (`d3rlpy.preprocessing.StandardObservationScaler` `method`), 127
`to_dict()` (`d3rlpy.preprocessing.StandardRewardScaler` `method`), 138
`to_json()` (`d3rlpy.models.AdamFactory` `method`), 158
`to_json()` (`d3rlpy.models.DefaultEncoderFactory` `method`), 167
`to_json()` (`d3rlpy.models.GPTAdamWFactory` `method`), 163
`to_json()` (`d3rlpy.models.IQNQFunctionFactory` `method`), 86
`to_json()` (`d3rlpy.models.MeanQFunctionFactory` `method`), 81
`to_json()` (`d3rlpy.models.OptimizerFactory` `method`), 154
`to_json()` (`d3rlpy.models.PixelEncoderFactory` `method`), 170
`to_json()` (`d3rlpy.models.QRQFunctionFactory` `method`), 84
`to_json()` (`d3rlpy.models.RMSpropFactory` `method`), 160
`to_json()` (`d3rlpy.models.SGDFactory` `method`), 156
`to_json()` (`d3rlpy.models.VectorEncoderFactory` `method`), 172
`to_json()` (`d3rlpy.preprocessing.ClipRewardScaler` `method`), 142
`to_json()` (`d3rlpy.preprocessing.ConstantShiftRewardScaler`

method), 151
 to_json() (d3rlpy.preprocessing.MinMaxActionScaler *method*), 131
 to_json() (d3rlpy.preprocessing.MinMaxObservationScaler *method*), 124
 to_json() (d3rlpy.preprocessing.MinMaxRewardScaler *method*), 135
 to_json() (d3rlpy.preprocessing.MultiplyRewardScaler *method*), 145
 to_json() (d3rlpy.preprocessing.PixelObservationScaler *method*), 121
 to_json() (d3rlpy.preprocessing.ReturnBasedRewardScaler *method*), 148
 to_json() (d3rlpy.preprocessing.StandardObservationScaler *method*), 127
 to_json() (d3rlpy.preprocessing.StandardRewardScaler *method*), 138
 trajectory_slicer (d3rlpy.dataset.MDPDataset *attribute*), 91
 trajectory_slicer (d3rlpy.dataset.MixedReplayBuffer *attribute*), 102
 trajectory_slicer (d3rlpy.dataset.ReplayBuffer *attribute*), 99
 trajectory_slicer (d3rlpy.dataset.ReplayBufferBase *attribute*), 95
 TrajectorySlicerProtocol (class in d3rlpy.dataset), 110
 transform() (d3rlpy.preprocessing.ClipRewardScaler *method*), 142
 transform() (d3rlpy.preprocessing.ConstantShiftRewardScaler *method*), 151
 transform() (d3rlpy.preprocessing.MinMaxActionScaler *method*), 132
 transform() (d3rlpy.preprocessing.MinMaxObservationScaler *method*), 125
 transform() (d3rlpy.preprocessing.MinMaxRewardScaler *method*), 136
 transform() (d3rlpy.preprocessing.MultiplyRewardScaler *method*), 145
 transform() (d3rlpy.preprocessing.PixelObservationScaler *method*), 121
 transform() (d3rlpy.preprocessing.ReturnBasedRewardScaler *method*), 148
 transform() (d3rlpy.preprocessing.StandardObservationScaler *method*), 128
 transform() (d3rlpy.preprocessing.StandardRewardScaler *method*), 139
 transform_numpy() (d3rlpy.preprocessing.ClipRewardScaler *method*), 142
 transform_numpy() (d3rlpy.preprocessing.ConstantShiftRewardScaler *method*), 152
 transform_numpy() (d3rlpy.preprocessing.MinMaxActionScaler *method*), 132
 transform_numpy() (d3rlpy.preprocessing.MinMaxObservationScaler *method*), 125
 transform_numpy() (d3rlpy.preprocessing.MinMaxRewardScaler *method*), 136
 transform_numpy() (d3rlpy.preprocessing.MultiplyRewardScaler *method*), 145
 transform_numpy() (d3rlpy.preprocessing.PixelObservationScaler *method*), 122
 transform_numpy() (d3rlpy.preprocessing.ReturnBasedRewardScaler *method*), 149
 transform_numpy() (d3rlpy.preprocessing.StandardObservationScaler *method*), 128
 transform_numpy() (d3rlpy.preprocessing.StandardRewardScaler *method*), 139
 TransformerActionSampler (class in d3rlpy.algos), 78
 TransformerAlgoBase (class in d3rlpy.algos), 72
 transition_count (d3rlpy.dataset.BufferProtocol *attribute*), 104
 transition_count (d3rlpy.dataset.FIFOBuffer *attribute*), 106
 transition_count (d3rlpy.dataset.InfiniteBuffer *attribute*), 105
 transition_count (d3rlpy.dataset.MDPDataset *attribute*), 91
 transition_count (d3rlpy.dataset.MixedReplayBuffer *attribute*), 102
 transition_count (d3rlpy.dataset.ReplayBuffer *attribute*), 99
 transition_count (d3rlpy.dataset.ReplayBufferBase *attribute*), 95
 transition_picker (d3rlpy.dataset.MDPDataset *attribute*), 91
 transition_picker (d3rlpy.dataset.MixedReplayBuffer *attribute*), 102
 transition_picker (d3rlpy.dataset.ReplayBuffer *attribute*), 99
 transition_picker (d3rlpy.dataset.ReplayBufferBase *attribute*), 95
 TransitionPickerProtocol (class in d3rlpy.dataset), 107
 update() (d3rlpy.algos.QLearningAlgoBase *method*), 36
 update() (d3rlpy.algos.TransformerAlgoBase *method*), 73
 update() (d3rlpy.ope.DiscreteFQE *method*), 198
 update() (d3rlpy.ope.FQE *method*), 188
 use_batch_norm (d3rlpy.models.DefaultEncoderFactory *attribute*), 168
 use_batch_norm (d3rlpy.models.PixelEncoderFactory *attribute*), 170
 use_batch_norm (d3rlpy.models.VectorEncoderFactory *attribute*), 173

V

VectorEncoderFactory (*class in d3rlpy.models*), 170

W

WanDBAdapter (*class in d3rlpy.logging*), 204

WanDBAdapterFactory (*class in d3rlpy.logging*), 209

weight_decay (*d3rlpy.models.AdamFactory attribute*),
159

weight_decay (*d3rlpy.models.GPTAdamWFactory attribute*), 163

weight_decay (*d3rlpy.models.RMSpropFactory attribute*), 161

weight_decay (*d3rlpy.models.SGDFactory attribute*),
156

write_metric() (*d3rlpy.logging.CombineAdapter method*), 207

write_metric() (*d3rlpy.logging.FileAdapter method*),
202

write_metric() (*d3rlpy.logging.LoggerAdapter method*), 201

write_metric() (*d3rlpy.logging.NoopAdapter method*), 206

write_metric() (*d3rlpy.logging.TensorboardAdapter method*), 204

write_metric() (*d3rlpy.logging.WanDBAdapter method*), 205

write_params() (*d3rlpy.logging.CombineAdapter method*), 207

write_params() (*d3rlpy.logging.FileAdapter method*),
202

write_params() (*d3rlpy.logging.LoggerAdapter method*), 201

write_params() (*d3rlpy.logging.NoopAdapter method*), 206

write_params() (*d3rlpy.logging.TensorboardAdapter method*), 204

write_params() (*d3rlpy.logging.WanDBAdapter method*), 205

WriterPreprocessProtocol (*class in d3rlpy.dataset*),
112